

BEAM LIGHTS SERIES



MINI BEAM 7R

POWER SUPPLY: AC 100-240V, 50/60HZ
POWER CONSUMPTION: 250W
LAMP SOURCE: ROCCER RSD 230W R7
BALLAST: ELECTRONIC BALLAST
LIFE: 2000HRS
CHANNEL CONTROL: DMX512
CHANNEL: 16CHS
IP RATING: IP20

COLOR WHEEL: 13 COLORS +WHITE (WITH RAINBOW EFFECT)
GOBO WHEEL: 14 GOBOS (11 FIXED GOBOS+ 3 GLASS GOBOS) + WHITE
PRISM: TWO PRISMS (ONE 8-FACET PRISM AND ONE 16-FACET PRISM)
DIMMING: 0-100% LINEAR DIMMING
STROBE: 0.5-14 TIMES PER SECOND, A VARIETY OF STROBOSCOPIC EFFECTS
LINEAR ZOOM OPTICAL: HIGH PRECISION OPTICAL GLASS LENS, 0 TO 20 DEGREES
FROST: 0-100% LINEAR FROST
DISPLAY: LCD DISPLAY, FOUR TOUCH SWITCH DISPLAY, 180° ROTATION
PAN/TILT: 540/270 DEGREES, 8/16 BIT RESOLUTION



MINI BEAM 250W

POWER SUPPLY: AC 100-240V, 50/60HZ
POWER CONSUMPTION: 280W
LAMP SOURCE: ROCCER RSD 250W
BALLAST: ELECTRONIC BALLAST
LIFE: 2000HRS
CHANNEL CONTROL: DMX512
CHANNEL: 16CHS
IP RATING: IP20

COLOR WHEEL: 13 COLORS +WHITE (WITH RAINBOW EFFECT)
GOBO WHEEL: 14 GOBOS (11 FIXED GOBOS+ 3 GLASS GOBOS) + WHITE
PRISM: TWO PRISMS (ONE 8-FACET PRISM AND ONE 16-FACET PRISM)
DIMMING: 0-100% LINEAR DIMMING
STROBE: 0.5-14 TIMES PER SECOND, A VARIETY OF STROBOSCOPIC EFFECTS
LINEAR ZOOM OPTICAL: HIGH PRECISION OPTICAL GLASS LENS, 0 TO 20 DEGREES
FROST: 0-100% LINEAR FROST
DISPLAY: LCD DISPLAY, FOUR TOUCH SWITCH DISPLAY, 180° ROTATION
PAN/TILT: 540/270 DEGREES, 8/16 BIT RESOLUTION



SUPER BEAM 10R 260W

POWER SUPPLY: AC 100-240V, 50/60HZ
POWER CONSUMPTION: 300W
LIFE: 2000HRS
DIMMING: 0-100% LINEAR DIMMING
FROST: 0-100% LINEAR FROST
CHANNEL CONTROL: DMX512
CHANNEL: 18CHS
IP RATING: IP20

LAMP SOURCE: ROCCER RSD 260W 10R (WITH OSRAM BURNER)
BALLAST: ORIGINAL OSRAM ELECTRONIC BALLAST
COLOR WHEEL: 14 COLORS + WHITE (WITH RAINBOW EFFECT ROTATION)
GOBO WHEEL: 14 GOBOS (9 FIXED GOBOS+ 5 GLASS GOBOS) + WHITE
PRISM: TWO PRISMS (ONE 8-FACET PRISM AND ONE (8+16) PRISM)
STROBE: 0.5-14 TIMES PER SECOND, A VARIETY OF STROBOSCOPIC EFFECTS
LINEAR ZOOM OPTICAL: HIGH PRECISION OPTICAL GLASS LENS, 0 TO 20 DEGREES
DISPLAY: LCD DISPLAY, FOUR TOUCH SWITCH DISPLAY, 180° ROTATION
PAN/TILT: 540/270 DEGREES, 8/16 BIT RESOLUTION



SUPER BEAM 12R 280W (WITH LED RGB RING)

POWER SUPPLY: AC 100-240V, 50/60HZ
POWER CONSUMPTION: 350W
LAMP SOURCE: ROCCER RSD 280W R12
BALLAST: ELECTRONIC BALLAST
LIFE: 2000HRS
DIMMING: 0-100% LINEAR DIMMING
FROST: 0-100% LINEAR FROST
CHANNEL CONTROL: DMX512
CHANNEL: 16CHS

COLOR WHEEL: 14 COLORS + WHITE (WITH RAINBOW EFFECT)
GOBO WHEEL: 14 GOBOS (9 FIXED GOBOS + 5 GLASS GOBOS) + WHITE
PRISM: TWO PRISMS (ONE 8-FACET PRISM AND ONE (8+16) PRISM)
DIMMING: 0-100% LINEAR DIMMING
STROBE: 0.5-14 TIMES PER SECOND, A VARIETY OF STROBOSCOPIC EFFECTS
LINEAR ZOOM OPTICAL: HIGH PRECISION OPTICAL GLASS LENS, 0 TO 20 DEGREES
DISPLAY: LCD DISPLAY, FOUR TOUCH SWITCH DISPLAY, 180° ROTATION
PAN/TILT: 540/270 DEGREES, 8/16 BIT RESOLUTION
IP RATING: IP20

BEAM LIGHTS SERIES



SUPER BEAM 14R 295W

POWER SUPPLY: AC 100-240V, 50/60HZ
POWER CONSUMPTION: 400W
BALLAST: ELECTRONIC BALLAST
LIFE: 2000HRS
DIMMING: 0-100% LINEAR DIMMING
FROST: 0-100% LINEAR FROST
CHANNEL CONTROL: DMX512
CHANNEL: 18CHS
IP RATING: IP20

LAMP SOURCE: ROCCER RSD 295W 14R (WITH OSRAM BURNER)
COLOR WHEEL: 14 COLORS + WHITE (WITH RAINBOW EFFECT ROTATION)
GOBO WHEEL: 13 GOBOS (8 FIXED GOBOS+ 5 GLASS GOBOS) + WHITE
PRISM: SIX PRISMS (8 PRISM/6-LINEAR PRISM/6+12 PRISM/16 PRISM/6-LINEAR PRISM /8+16+24 PRISM)
STROBE: 0.5-14 TIMES PER SECOND, A VARIETY OF STROBOSCOPIC EFFECTS
LINEAR ZOOM OPTICAL: HIGH PRECISION OPTICAL GLASS LENS, 0 TO 20 DEGREES
DISPLAY: LCD DISPLAY, FOUR TOUCH SWITCH DISPLAY, 180° ROTATION
PAN/TILT: 540/270 DEGREES, 8/16 BIT RESOLUTION



SUPER BEAM 311W

POWER SUPPLY: AC 100-240V, 50/60HZ
POWER CONSUMPTION: 420W
LAMP SOURCE: ROCCER RSD 311W
BALLAST: ELECTRONIC BALLAST
LIFE: 2000HRS
FROST: 0-100% LINEAR FROST
CHANNEL CONTROL: DMX512
CHANNEL: 18CHS
IP RATING: IP20

COLOR WHEEL: 14 COLORS + WHITE (WITH RAINBOW EFFECT ROTATION)
GOBO WHEEL: 13 GOBOS (8 FIXED GOBOS+ 5 GLASS GOBOS) + WHITE
PRISM: SIX PRISMS (8 PRISM/6-LINEAR PRISM/6+12 PRISM/16 PRISM/6-LINEAR PRISM /8+16+24 PRISM)
DIMMING: 0-100% LINEAR DIMMING
STROBE: 0.5-14 TIMES PER SECOND, A VARIETY OF STROBOSCOPIC EFFECTS
LINEAR ZOOM OPTICAL: HIGH PRECISION OPTICAL GLASS LENS, 0 TO 20 DEGREES
DISPLAY: LCD DISPLAY, FOUR TOUCH SWITCH DISPLAY, 180° ROTATION
PAN/TILT: 540/270 DEGREES, 8/16 BIT RESOLUTION



SUPER BEAM 20R 450W

POWER SUPPLY: AC 100-240V, 50/60HZ
POWER CONSUMPTION: 500W
LAMP SOURCE: ROCCER RSD 450W 20R
BALLAST: ELECTRONIC BALLAST
LIFE: 2000HRS
FROST: 0-100% LINEAR FROST
CHANNEL CONTROL: DMX512
CHANNEL: 18CHS
IP RATING: IP20

COLOR WHEEL: 14 COLORS + WHITE (WITH RAINBOW EFFECT ROTATION)
GOBO WHEEL: 13 GOBOS (9 FIXED GOBOS+ 4 GLASS GOBOS) + WHITE
PRISM: SIX PRISMS (8 PRISM/6-LINEAR PRISM/6+12 PRISM/16 PRISM/6-LINEAR PRISM /8+16+24 PRISM)
DIMMING: 0-100% LINEAR DIMMING
STROBE: 0.5-14 TIMES PER SECOND, A VARIETY OF STROBOSCOPIC EFFECTS
LINEAR ZOOM OPTICAL: HIGH PRECISION OPTICAL GLASS LENS, 0 TO 20 DEGREES
DISPLAY: LCD DISPLAY, FOUR TOUCH SWITCH DISPLAY, 180° ROTATION
PAN/TILT: 540/270 DEGREES, 8/16 BIT RESOLUTION

LED MOVING HEAD LIGHTS SERIES



LED 6*40W BEE EYE MOVING HEAD

| | |
|-------------------------------------|--|
| LIGHT SOURCE: 6X 40W 4IN1 RGBW LED | CONTROL MODES: DMX512/MATER-SLAVE/AUTO RUN/MUSIC/RDM |
| BEAM ANGLE: 3.5°~ 45° | DISPLAY: LCD DISPLAY |
| POWER CONSUMPTION: 220W | DATA IN/OUT SOCKET: 3-PIN XLR SOCKETS |
| POWER VOLTAGE: AC 100-240V, 50/60HZ | POWER SOCKET: POWERCON IN/OUT |
| DMX CHANNEL: 21/24/32/56 CHANNEL | MOTORIZED LINER ZOOM SYSTEM, ZOOM RANGE: 3.5°~45° |
| PAN/TILT: 540° / 270° | PIXELS CONTROL |
| PAN/TILT RESOLUTION: 8/16 BIT | OUTSTANDING COLOR MACRO EFFECT |
| PROTECTION RATING: IP20 | VARIABLE STROBE EFFECTS |
| DIMMER: 0~100% SMOOTH DIMMING | FAST, QUIET OPERATION AND FLICKER FREE |



LED 7*40W ZOOM WASH MOVING HEAD

| | |
|-------------------------------------|--|
| LIGHT SOURCE: 7X 40W 4IN1 RGBW LED | CONTROL MODES: DMX512/MATER-SLAVE/AUTO RUN/MUSIC/RDM |
| BEAM ANGLE: 7°~ 45° | DATA IN/OUT SOCKET: 3-PIN XLR SOCKETS |
| POWER CONSUMPTION: 250W | POWER SOCKET: POWER CON IN/OUT |
| POWER VOLTAGE: AC 100-240V, 50/60HZ | MOTORIZED LINER ZOOM SYSTEM |
| DMX CHANNEL: 17 /22CH | OUTSTANDING COLOR MACRO EFFECT |
| PAN/TILT: 540° / 270° | DIMMER: 0~100% SMOOTH DIMMING |
| PAN/TILT RESOLUTION: 8/16 BIT | VARIABLE STROBE EFFECTS |
| DISPLAY: LCD DISPLAY | FAST, QUIET OPERATION AND FLICKER FREE |
| PROTECTION RATING: IP20 | |



LED 19*20W ZOOM WASH MOVING HEAD

| | |
|--------------------------------------|--|
| LIGHT SOURCE: 19*20W 4IN1 RGBW LED | CONTROL MODES: DMX512/MATER-SLAVE/AUTO RUN/MUSIC |
| BEAM ANGLE: 5.8°- 55° | DISPLAY: 180° REVERSIBLE 1.8 INCH TFT COLORFUL DISPLAY |
| POWER CONSUMPTION: 350W | DATA IN/OUT SOCKET: 3-PIN & 5-PIN XLR SOCKETS |
| POWER VOLTAGE: AC 100-240V, 50/60HZ | LED SINGLE CONTROL, CAN DISPLAY ARROWS, NUMBERS, LETTERS AND PATTERNS |
| DMX CHANNEL: 21/23/35/78/92/97/99 CH | HIGH-EFFICIENCY OPTICAL SYSTEM, WONDERFUL FLOWER EFFECT PLUS ZOOM |
| PAN: 540° / 360°, TILT: 270° | FAN WORK SPEED AUTO ADJUSTABLE WITH HEAD TEMPERATURE |
| PAN/TILT RESOLUTION: 8/16 BIT | LED TEMPERATURE PROTECTION & FAN RUN SPEED AUTOMATIC BASED ON THE HEAD TEMPERATURE |
| POWER SOCKET: POWER CON IN/OUT | |
| PROTECTION RATING: IP20 | |

LED MOVING HEAD LIGHTS SERIES



LED 37*15W ZOOM WASH MOVING HEAD

| | |
|--------------------------------------|---|
| POWER VOLTAGE: AC 100~240V, 50/60HZ | MOVEMENT: PAN: 540° TILT: 270° |
| POWER CONSUMPTION: 500W | PAN/TILT RESOLUTION: 16BIT |
| LIGHT SOURCE: 37X15W RGBW 4 IN 1 LED | DIMMING/STROBE: 0~100% SMOOTH DIMMING, VARIABLE STROBE SPEEDS |
| ZOOM RANGE: 10°~60° | CONTROL: DMX CHANNEL: 15/31/35 CHANNELS |
| MOVEMENT: PAN: 540° TILT: 270° | CONTROL MODE: DMX, RDM, MASTER/SLAVE, WIRELESS CONTROL (OPTIONAL) |
| PAN/TILT RESOLUTION: 16BIT | FIRMWARE UPGRADE: UPDATE VIA DMX LINK |
| DISPLAY: LCD DISPLAY | POWER IN/OUT: POWER CONNECTOR IN/OUT |
| DATA IN/OUT: 3-PIN&5-PIN XLR | ELECTRONIC LINEAR ZOOM SYSTEM |
| PROTECTION RATING: IP20 | RING CONTROL, OUTSTANDING COLOR MACRO EFFECT |



LED 150W BEAM

| | |
|-----------------------------------|--|
| POWER SUPPLY: AC110-220V, 50-60HZ | RAINBOW: 6 COLORS RAINBOW EFFECT |
| POWER CONSUMPTION: 200W | PRISM: 6+12 FACET PRISM |
| LIGHT SOURCE: 1 150W WHITE LED'S | CHANNEL: 11/13CHS |
| GOBO WHEEL: 12 FIXED GOBOS | CONTROL MODE: VOICE CONTROL, MASTER-SLAVE, |
| COLOUR WHEEL: 8 COLOURS | SELF-PROPELLED, DMX |



LED 200W MINI BEAM

| | |
|-----------------------------------|---|
| POWER SUPPLY: AC100~240V, 50/60HZ | PRISM: 18FACET PRISM, BI-DIRECTIONAL ROTATABLE AT VARIABLE SPEEDS |
| LIGHT SOURCE: 200W WHITE LED'S | COLOUR WHEEL: 9COLORS+WHITE |
| POWER CONSUMPTION: 250W | GOBO WHEEL: 13 FIXED GOBOS+WHITE |
| DIMMING: LINEAR DIMMING 0-100% | CHANNEL: 14CHS |
| STROBE: 1-25HZ/S | CONTROL MODEL: DMX, MASTER SLAVE, AUTO, SOUND |

MOVING HEAD BEAM SPOT & WASH(3 IN 1)



380W BSW 3IN1 (CTO)

POWER SUPPLY: AC90-260V 50/60HZ
POWER CONSUMPTION: 600W
LAMP SOURCE: ROCCER RSD 18R
380W LIFE: 1500HRS
DIMMER: 0-100% LINEAR DIMMING
FOCUS: LINEAR MOTORIZED FOCUS
CHANNEL: 22CHS
IP RATING: IP20
BEAM ANGLE: 2.2°-54°

COLOR WHEEL: 9 COLORS+ LINEAR CTO + WHITE,
COLOR FINE TUNING
GOBO WHEEL 1: 11 FIXED GOBOS+ WHITE
GOBO WHEEL 2: 7 GLASS GOBOS+WHITE,
WHEEL ROTATION AND SHAKE
PRISM: 8 FACET PRISM AND, 3 FACET PRISM,
BI-DIRECTIONAL ROTATABLE AT VARIABLE SPEEDS
STROBE: HIGH SPEED STROBE EFFECT WITH
0.3-25 FLASHERS PER SECOND
PAN/TILT: 540/270°, 8/16 BIT RESOLUTION



LED 500W BSW 3IN1 WITH CMY CTO

POWER SUPPLY: AC100-240V 50/60HZ
POWER CONSUMPTION: 600W
LAMP SOURCE: LED 500W
LIFE: 20000HRS
DIMMER: 0-100% LINEAR DIMMING
FOCUS: LINEAR MOTORIZED FOCUS
CHANNEL: 22 / 26 CHS
IP RATING: IP20
BEAM ANGLE: 3°-45°
LUX: 5M 168000LM

COLOR WHEEL: 8 COLORS+ WHITE, CMY, CTO
GOBO WHEEL 1: 12 FIXED GOBOS+ WHITE
GOBO WHEEL 2: 7 GLASS GOBOS+WHITE,
WHEEL ROTATION AND SHAKE
PRISM: 8 PRISM + SINGLE SIX ROW PRISM
BI-DIRECTIONAL ROTATABLE AT VARIABLE SPEEDS
STROBE: HIGH SPEED STROBE EFFECT WITH
0-30 FLASHERS PER SECOND
PAN/TILT: 540/270 DEGREES, 8/16 BIT RESOLUTION

LASER LIGHTS SERIES

6 EYES BEAM BAR LASER (RGB 3 IN 1)



VOLTAGE: AC 100V~230V 50~60HZ±10%
POWER CONSUMPTION: 100W
LASER: SEMICONDUCTOR LASER
LASER MODULATION: TTL MODULATION
LASER POWER: 3W RGB (500MW RGB BEAMS*6 PCS)
LASER COLOR: RGB FULL COLOR
LASER SYSTEM: MOTOR SYSTEM
LASER EFFECTS: LASER BEAMS
CONTROL MODEL: SOUND, AUTOMATIC, DMX512, MASTER & SLAVE
DMX CHANNEL: 11/26/38CHS

1W DOLPHIN ANIMATION LASER RGB



VOLTAGE: AC100V~230V 50~60HZ±10%
POWER CONSUMPTION: 100W
LASER: SEMICONDUCTOR LASER
LASER MODULATION: TTL MODULATION
LASER POWER: 1WRGB (G150R350B500)
LASER COLOR: RGB
LASER SYSTEM: SCANNER SYSTEM-15KPPS
CONTROL MODEL: SOUND, AUTOMATIC, DMX512, MASTER & SLAVE
DMX CHANNEL: 12 CHS

5W ANIMATION LASER RGB



VOLTAGE: AC100V~230V 50~60HZ±10%
POWER CONSUMPTION: 150W
LASER: SEMICONDUCTOR LASER
LASER MODULATION: TTL MODULATION
LASER POWER: 5WRGB (G1000R2000B2000)
LASER COLOR: RGB
LASER SYSTEM: SCANNER SYSTEM-25KPPS
CONTROL MODEL: SOUND, AUTOMATIC, DMX512, MASTER & SLAVE, ILDA CONTROL
DMX CHANNEL: 25 CHS

10W ANIMATION LASER RGB



VOLTAGE: AC100V~230V 50~60HZ±10%
POWER CONSUMPTION: 500W
LASER: SEMICONDUCTOR LASER
LASER MODULATION: TTL MODULATION
LASER POWER: 10WRGB (G3000R3000B4000)
LASER COLOR: RGB
LASER SYSTEM: 30KPPS
CONTROL MODEL: SOUND, AUTOMATIC, DMX512, MASTER & SLAVE, ILDA CONTROL
DMX CHANNEL: 25 CHS

LED RETRO LIGHTS SERIES



JOINT RETRO LIGHT


VOLTAGE: AC100~220V 50/60 HZ
 POWER: 72*0.25W (18W) + 60W
 LAMP BEADS: 72 5050 TRICOLOR LED LAMP BEADS + LONG WHITE LAMP BEADS
 CONTROL MODE: DMX512, SELF-MOVING, MASTER-SLAVE, VOICE CONTROL,
 WITH RDM FUNCTION.
 CHANNEL: CH010, CH04, AND CH73
 DIMMING: 32BIT 0 TO 100% LINEAR DIMMING
 FEATURES: DYE + FLASH + AUXILIARY LIGHT
 OPERATING TEMPERATURE: -30 DEGREES ~50 DEGREES
 STROBOSCOPIC FREQUENCY: 1 TO 30HZ
 APPEARANCE: METAL, BLACK
 CONNECTION MODE: DMX512 INPUT/OUTPUT/POWER INPUT/OUTPUT
 IP LEVEL: IP20

MINI RETRO LIGHT



VOLTAGE: AC100-240V, 50/60HZ
 POWER: 800W
 LIGHT SOURCE: 7PCS*50W WARM WHITE COB LED + 144PCS*0.3W
 RGB 3IN1 5050 LED
 LED LIFE TIME: 100,000 HOURS
 COLOR TEMPERATURE: 3200K-5600K
 FUNCTION: EACH COB LED CAN BE CONTROLLED DIVIDED INNER
 PROGRAM: COLORFUL, DIMMER, STROBE, FOLLOW UP EFFECT
 DIMMER: 0-100% DIMMER STROBE: 0-20 C/S
 DMX: 3/5/11 CHANNEL
 OPERATION: DMX512, MASTER-SLAVE, AUTO, SOUND MODEL
 PROTECTION GRADE: IP20

7 EYES RETRO LIGHT

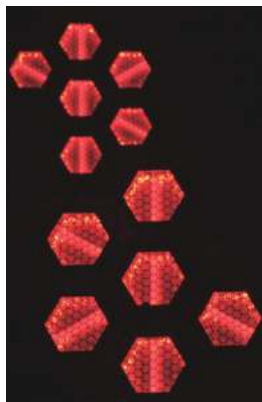

INPUT POWER: AC90V-240V
 POWER FREQUENCY: 50/60HZ
 POWER: 480W
 HEAT DISSIPATION METHOD: METAL HEAT CONDUCTION
 MAXIMUM OPERATING AMBIENT TEMPERATURE: 45°C
 NUMBER OF LAMP BEADS: 7 HIGH-BRIGHTNESS 60W
 LAMP BEADS + 168 LED THREE-IN-ONE LAMP BEADS
 LAMP BEAD TYPE: RGB THREE-IN-ONE LAMP BEAD + INTEGRATED LAMP BEAD
 STROBE: 1-25 TIMES/SECOND
 NUMBER OF DMX CONTROL CHANNELS: 8CH+32CH
 DMX CONNECTOR: 3PIN XLR
 OPERATION MODE: DMX/AUTO/VOICE CONTROL
 DISPLAY MODE: LED DIGITAL TUBE
 CHANNEL TABLE 8CH+32CH