

 **cameo**[®]
colours of light

PRODUCT
CATALOGUE

TABLE OF CONTENTS

CONTROLLER	04
LED MOVING HEADS	10
LED MOVING EFFECTS	32
PIXEL MAPPING	48
THEATRE SPOTLIGHTS	52
LED STANDARD PAR CANS	56
LED FLAT PAR CANS	80
LED STUDIO PAR CANS	96
LED OUTDOOR FIXTURES	114
LED BARs	136
LASERS	152
LED STROBES	158
LED LIGHT EFFECTS	172
LED SCANNERS	198
LED SETS	204
HAZER	216
WIND MACHINES	220
FLUIDS	222
ACCESSORIES	224
LASER ACCESSORIES	229







In just a short time, Cameo® has developed into a leading brand for professional lighting equipment.

Our product portfolio currently consists of over 100 innovative LED lighting products, lasers, and accessories for a wide variety of applications - ranging from small clubs to complex rigs at major events.

The future of Cameo® is full of plans and ideas for the development and production of sophisticated new products.

Using state of the art technology as well as energy-efficient and long-lasting LED and laser technology, we are working hard to implement the ideas and requirements of our users.

We look forward to receiving your feedback and wish you a lot of fun with the Cameo® catalogue!

Your Cameo® Team



In wenigen Jahren hat sich Cameo® zu einer bedeutenden Marke für professionelles Lichtequipment entwickelt.

Das Portfolio umfasst derzeit über 100 innovative LED-Lichtprodukte, Laser und Accessoires für die unterschiedlichsten Anwendungen – von kleinen Clubs bis hin zu komplexen Rigs auf Großveranstaltungen.

Die Zukunft von Cameo® ist voller Pläne und Ideen für die Weiterentwicklung und Herstellung ausgereifter Produktneuheiten. Unter dem Einsatz modernster Technologien sowie energieeffizienter und langlebiger LED- und Laser-Technik ist es das Ziel, die Ideen und Anforderungen unserer Nutzer umzusetzen.

Wir freuen uns auf Ihr Feedback und wünschen viel Spaß mit dem aktuellen Cameo® Katalog.

Ihr Cameo® Team



En muy pocos años, Cameo® se ha convertido en una marca reconocida en el sector de equipos profesionales de iluminación.

Nuestro catálogo incluye actualmente más de 100 innovadores productos de iluminación LED, láseres y accesorios para una amplia gama de aplicaciones, desde pequeños clubes hasta complejas instalaciones en grandes escenarios.

El futuro de Cameo® también viene repleto de proyectos e ideas para desarrollar y fabricar nuevos productos avanzados. Mediante el uso de las tecnologías más avanzadas, como los LED y láseres energéticamente eficientes y duraderos, tenemos como objetivo llevar a la práctica las ideas y demandas de nuestros usuarios.

Estaremos encantados de recibir sus sugerencias y esperamos que disfrute con nuestro catálogo actualizado de Cameo®.

El equipo de Cameo®



En quelques années seulement, Cameo® est devenue l'une des marques les plus appréciées dans le domaine des éclairages professionnels.

Le catalogue de la marque propose aujourd'hui plus de 100 produits innovants à LED, des lasers et des accessoires destinés aux applications les plus variées – des petits clubs aux installations ou concerts les plus complexes.

Cameo® est tourné vers l'avenir : une multitude de projets et d'idées en cours déboucheront sur de nouveaux développements et de nombreuses nouveautés en termes de produits.

En utilisant les technologies les plus modernes et en adoptant des sources lumineuses LED et laser, synonymes d'efficacité énergétique et de longue durée de vie, notre but est de créer les produits imaginés et réclamés par nos utilisateurs.

N'hésitez pas à nous faire part de vos remarques, idées ou besoins ! Nous espérons que vous apprécierez notre Catalogue Cameo®.

Votre équipe Cameo®

www.cameolight.com

Cameo® is a brand of Adam Hall Group.



www.facebook.com/cameolightandsound
www.youtube.com/cameolightandsound
blog.adamhall.com

NEW!



- ▶ USB to DMX interface with 512 DMX channels in Live mode
- ▶ Built-in flash memory for 256 DMX channels in Standalone mode
- ▶ User friendly and intuitive Cameo DMX lighting software package by Daslight running on Windows and Mac OSX for free download
- ▶ Software includes more than 15,000 fixture libraries, or create your own using the integrated ScanLibrary editor
- ▶ Create hundreds of amazing pixel and video effects plus moving head and scanner positions with the powerful XEEL engine
- ▶ Trigger scenes and control levels with a multi-touch screen, iPhone/iPad/Android or MIDI/DMX controller
- ▶ Synchronize your show with the BPM or pulse of the music via the included audio analyzer or MIDI clock
- ▶ Design your show and pre-render your lighting effects with the real-time 3D visualization tool



CONTROLLER



DVC 4

512-CHANNEL DMX INTERFACE AND CONTROL SOFTWARE PACKAGE

The Cameo DVC 4 lets you control any DMX compatible fixture from your computer and mac running the dedicated Cameo D 4 software. The plug-and-play interface provides 512 DMX channels in live mode and includes an internal memory for 256 channels in standalone mode. This allows you to copy your light show programming to the unit and run it without a computer. Featuring a mini-USB input and 3-pin DMX output the DVC 4 is powered from the computer's USB port. Three control buttons enable program selection and dimming in standalone mode which requires a standard 5V USB power adapter.

The free Cameo D 4 software package includes more than 15,000 fixture libraries and a Scan Library editor to create your own. It lets you map out individual fixture types, group them and compose master layouts in 2D view. Create, arrange and stack dynamic scenes, use the integrated Palettes to control your lights without the need to move faders, and generate hundreds of exciting effects with the XEEL Engine.


Product number:	CLDVC4
Product type:	USB to DMX Interface
Live channels:	512
Stand Alone channels:	256
Software Mode:	Full Cameo D 4 / full daslight DVC 4
Inputs:	Mini USB
Outputs:	XLR 3-pin female
Memory:	20 K
Dry contact ports:	8
Operating voltage:	USB
Width:	78 mm
Height:	27 mm
Depth:	88 mm
Accessories (included):	USB to Mini USB cable
Weight:	0.2 kg

NEW!



- ▶ 54-channel DMX Controller
- ▶ For up to 9 fixtures or fixture groups
- ▶ Compatible with all RGB, RGBW, RGBWA and RGBWA+UV fixtures
- ▶ 6 smooth faders for Red, Green, Blue, White, Amber and UV intensity control
- ▶ 9 colour presets with direct-access buttons
- ▶ Direct access to Auto or Manual modes, Blackout, Colour Jump, Colour Fade, Strobe and Sound Activation with sensitivity control
- ▶ Powered by included adapter or 9 V battery
- ▶ Ideal for DJs, nightclubs, lounges, bars etc.

CONTROLLER

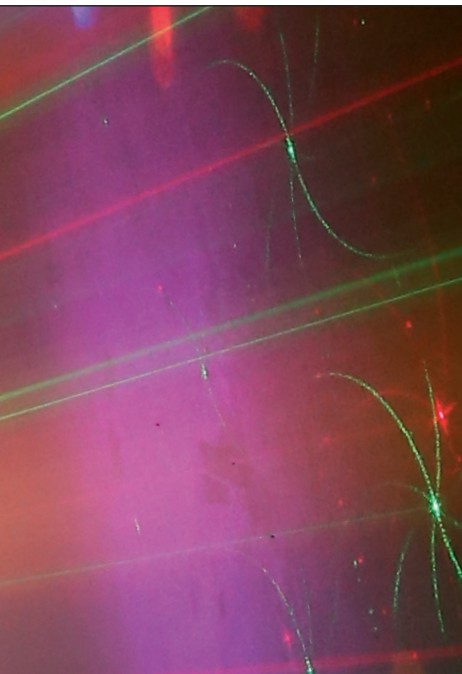

CONTROL 54

54-CHANNEL DMX CONTROLLER

The Control 54 is a compact DMX lighting desk that handles up to 9 fixtures or fixture groups. Providing easy and intuitive operation, the versatile console is an ideal choice for DJs, nightclubs, lounges and bars. It features 9 colour presets with quick-access buttons that double as fixture selectors and 6 faders to individually control Red, Green, Blue, White, Amber and UV intensity.

Multiple function buttons enable direct access to Sound Activation with adjustable microphone sensitivity, Strobe, Blackout, Colour Fade, Colour Jump, Auto or Manual modes, and an LC display conveniently shows the current function and parameters.


The Cameo Control 54 comes with a 9 - 12 V DC power adapter and 9 V battery for optional battery operation. It is compatible with all Cameo LED Bars, Cameo PAR Cans including the FLAT PAR PRO and FLAT PAR 1 Series and other fixtures with RGB, RGBW, RGBWA and RGBWA+UV colour mixing.

Product number:	CLCONTROL54
Product type:	DMX Mixers
Number of DMX channels:	54
Control:	USITT DMX 512 protocol
Modes:	Auto Mode, Manual control, Music control, Colour macros, colour jump, Stroboscope, colour fade, Blackout
DMX output:	XLR 3-pin female
Controls:	Controller for microphone sensitivity, On / off switch, 22 control buttons, 6x channel faders
Indicators:	LC display
Operating voltage:	External Power Supply, 9 V block, 9 - 12 V DC
Colour:	grey
Material:	metal
Width:	316mm
Height:	63mm
Depth:	140mm
Accessories (included):	9 V block, power supply
Weight:	1.5kg



- ▶ Universal 6-channel DMX controller
- ▶ Battery operation possible
- ▶ External power supply included
- ▶ Rugged metal housing

CONTROLLER

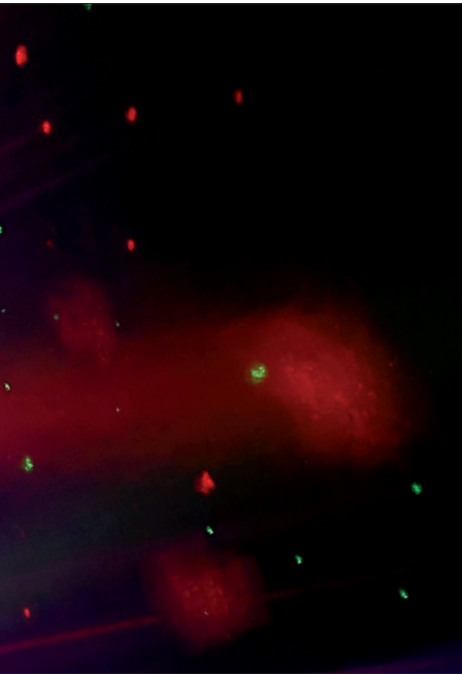

CONTROL 6 6 CHANNEL DMX CONTROLLER

The Cameo CLCONTROL6 is an especially compact DMX controller with six channels that is perfect for controlling small lighting systems. It can be mounted in many ways and of course can also be used as a freestanding unit; it is extremely easy to operate. The CLCONTROL6 has six smoothly shifting faders for the individual DMX channels and a master fader. It can be powered using the included external power adapter or battery and thus is universally useable for manual control of DMX systems. A 3-pin XLR socket is used as the DMX output; a red LED serves as a power indicator. This straightforward lightweight impresses with clear functionality and high user-friendliness.

Product number:	CLCONTROL6
Product type:	DMX Mixers
Number of DMX channels:	6
DMX output:	XLR 3-pin female
Controls:	6 x channel faders, master fader
Indicators:	Power LED
Operating voltage:	9 V block, External Power Supply, 9 - 12 V DC
Width:	167 mm
Height:	56 mm
Depth:	134 mm
Accessories (included):	9 V block, AC Adapter, power supply
Weight:	1 kg


NEW!



- ▶ LED Moving Matrix with infinite pan and tilt
- ▶ Two high-speed 3-phase motors
- ▶ 16-bit resolution and 3,600 Hz refresh rate
- ▶ 5 x 5 powerful 15 watt quad LED array
- ▶ Rich RGBW colors, subtle pastel shades, 3 natural whites
- ▶ 4 DMX modes, RDM capability and ArtNET compatible
- ▶ Ethernet switch with FDT bridging (failsafe data transfer)
- ▶ Automatic positioning and color temperature correction
- ▶ Single pixel control
- ▶ 20 Hz strobe and 4 dimming curves
- ▶ 3- and 5-pin DMX, Neutrik powerCON and RJ45 Ethernet connectors
- ▶ Silent-operation temperature controlled fan



LED MOVING HEADS

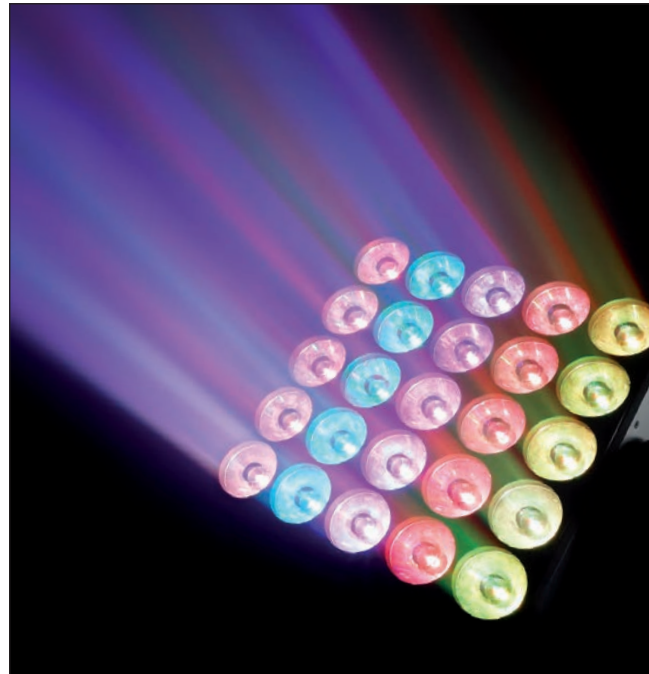

AURO MATRIX 500

5 X 5 LED MOVING MATRIX

Thoroughly professional and feature-packed, the Cameo Auro® Matrix 500 produces rich RGBW colour mixing and three temperatures of white with its 5 x 5 arrangement of 25 powerful 15 watt quad LEDs. Two high speed 3-phase motors enable infinite pan and tilt, 16-bit resolution provides ultra smooth rotation and dimming, and the fixture's 3,600 Hz refresh rate makes it a perfect choice for TV and video applications.

Product number:	CLAM500
Product type:	LED Moving Lights
Type:	LED Moving Heads
Colour spectrum:	RGBW
Number of LEDs:	25
LED type:	15 W
Refresh rate:	3,600 Hz
Dispersion:	7.7°, 4.7°
DMX input:	XLR 5-pin male, RJ45 Ethernet in (ArtNET), XLR 3-pin male
DMX output:	RJ45 Ethernet out (ArtNET), XLR 5-pin female, XLR 3-pin female
DMX mode:	33-channel, 111-channel, 37-channel, 8-channel
DMX Functions:	Pan / tilt, auto programs, colour temperature correction, strobe, dimmer curve, RGBW, dimmer, colour macro, patterns, pan / tilt fine
PAN / TILT movement:	Unlimited
High Speed Strobe:	0 - 20 Hz
Standalone modes:	Auto run
Controls:	+, -, value up, value down, mode, battery display
Indicators:	Colour LC display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	490 W
Power connector:	Neutrik powerCon
Housing material:	ABS plastic, metal
Cabinet colour:	Black
Cooling:	Convection
Illuminance:	78,000 lx @ 1 m
Luminous flux:	8,250 lm
Width:	480 mm
Height:	585 mm
Depth:	261 mm
Weight:	19 kg

NEW!



- ▶ LED Moving Bar with infinite pan and tilt
- ▶ Two high-speed 3-phase motors
- ▶ 16-bit resolution and 3,600 Hz refresh rate
- ▶ 7 powerful 15 watt quad LEDs
- ▶ Rich RGBW colors, subtle pastel shades, 3 natural whites
- ▶ 4 DMX modes, RDM capability and ArtNET compatible
- ▶ Ethernet switch with FDT bridging (failsafe data transfer)
- ▶ Automatic positioning and color temperature correction
- ▶ Single pixel control
- ▶ 20 Hz strobe and 4 dimming curves
- ▶ 3- and 5-pin DMX, Neutrik powerCON and RJ45 connectors
- ▶ Battery powered 6-button display for offline setting



LED MOVING HEADS



CLABAR 100 LED MOVING BAR

Designed for exciting, highly creative lighting, the Cameo Auro® Bar 100 produces subtle to rich, saturated RGBW color mixes and three temperatures of white with a line of seven 15 watt quad LEDs. The all-professional moving light's features include two high speed 3-phase motors for infinite pan and tilt, 16-bit resolution for ultra smooth motion and dimming, and with a 3,600 Hz refresh rate it is ideal for TV and video applications.

Product number:	CLABAR100
Product type:	LED Moving Lights
Type:	LED Moving Heads
Colour spectrum:	RGBW
Number of LEDs:	7
LED type:	15 W
Refresh rate:	3,600 Hz
Dispersion:	4°
DMX input:	RJ45 Ethernet In (ArtNET), XLR 3-pin male, XLR 5-pin male
DMX output:	XLR 5-pin female, XLR 3-pin female, RJ45 Ethernet Out (ArtNET)
DMX mode:	39-channel, 29-channel, 19-channel, 9-channel
DMX Functions:	RGBW, auto programs, colour macro, dimmer, dimmer curve, strobe, pan / tilt, colour temperature correction, pan / tilt fine, patterns
PAN movement:	Unlimited
TILT movement:	Unlimited
High Speed Strobe:	0 - 20 Hz
Standalone modes:	Auto run
Controls:	Value up, Value down, mode, battery display, enter, -, +
Indicators:	Colour LC display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	140 W
Power connector:	Neutrik powerCon
Housing material:	ABS plastic, metal
Cabinet colour:	Black
Cooling:	Convection
Illuminance:	42,000 lx @ 1 m
Luminous flux:	2,300 lm
Width:	570 mm
Height:	260 mm
Depth:	195 mm
Weight:	9.5 kg




- ▶ 7 high-power 15 W quad LEDs
- ▶ RGBW spectrum for saturated primary colours, subtle pastel shades and natural shades of white
- ▶ Single pixel control for effective pixel-mapping effects
- ▶ 2 high-speed engines for precise, high-speed and unlimited pan and tilt movements
- ▶ Effective automated operating modes
- ▶ Programmable standalone scenes
- ▶ Professional 3- and 5-pin DMX sockets and Neutrik powerCon mains connector
- ▶ With a 3,600 Hz refresh rate, it is ideal for TV and video applications
- ▶ RDM-enabled
- ▶ 4 selectable dimming curves
- ▶ Colour temperature correction
- ▶ 3 temperatures of white: warm white, white, cool white





**Unlimited
pan & tilt
rotation**

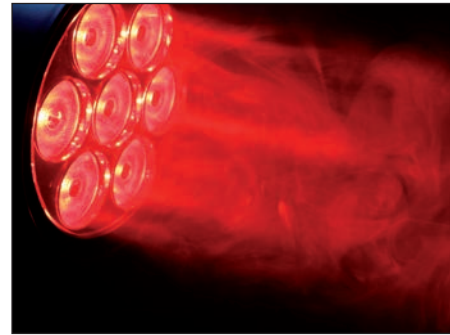

AUROBEAM 150

7 X 15 W RGBW LED **UNLIMITED MOVING HEAD**

The Cameo AuroBeam 150 is an ultra-fast moving head with unlimited pan and tilt movement, 16-bit resolution and a 3,600 Hz refresh rate. Seven 15 W quad RGBW LEDs produce rich colours, fresh pastel colours and vibrant shades of white with a 12° beam angle and a light intensity of 50,000 lux; the single pixel control ensures impressive pixel-mapping effects. The professional features of the AuroBeam 150 include a low-noise temperature-controlled fan, powerCON mains connectors from Neutrik and 3- and 5-pin inputs and outputs for the DMX signal. It can be operated fully automatically with programmable scenes or music, or used in standalone, master or slave mode; when using DMX. Five-channel, 11-channel, 19-channel and 41-channel control modes are available, featuring among others dimmer and strobe functions.

Product number:	CLABEAM150
Product type:	LED moving light
Type:	Moving head
Colour range:	RGBW
Number of LEDs:	7
LED type:	15 W
Refresh rate:	3,600 Hz
Dispersion:	12°
DMX input:	XLR 3-pin male, XLR 5-pin male
DMX output:	XLR 3-pin female, XLR 5-pin female
DMX mode:	11-channel, 5-channel, 19-channel, 41-channel
DMX functions:	Strobe, single pixel control, pan / tilt fine, pan / tilt, dimmer
Pan movement:	Unlimited
Tilt movement:	Unlimited
High-speed strobe:	>30 Hz
Standalone modes:	Auto run, sound control, show
Controls:	Mode, enter, value up, value down, +, -
Indicators:	Colour LC display
Power supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	130 W
Power connector:	Neutrik powerCON input / output
Housing material:	ABS / metal
Housing colour:	Black
Type of cooling:	Silent, temperature-controlled fan
Illuminance:	50,000 lx @ 1 m
Dimensions (W x H x D):	375 x 260 x 180 mm (excluding mounting bracket)


NEW!



- ▶ RDM-capable moving head with high-power single LED
- ▶ 200,000 lx @ 1 m, 4,470 lm
- ▶ High-speed 3-phase motors
- ▶ Motor focus, pan and tilt with 16-bit resolution
- ▶ Automatic positioning correction
- ▶ 2 color wheels, 12 colors, split colors, warm and cold white plus open
- ▶ 2 gobo wheels, 7 rotating, 9 fixed gobos plus open
- ▶ Frost filter
- ▶ Rotating 3, 5 and 8-facet prisms
- ▶ 0 – 20 Hz strobe
- ▶ Smooth 100 – 0% dimming with 4 selectable curves
- ▶ Temperature controlled low-noise fan
- ▶ 3 and 5-pin DMX and Neutrik powerCON inputs and outputs
- ▶ Battery powered 6-button display for offline configuration



LED MOVING HEADS

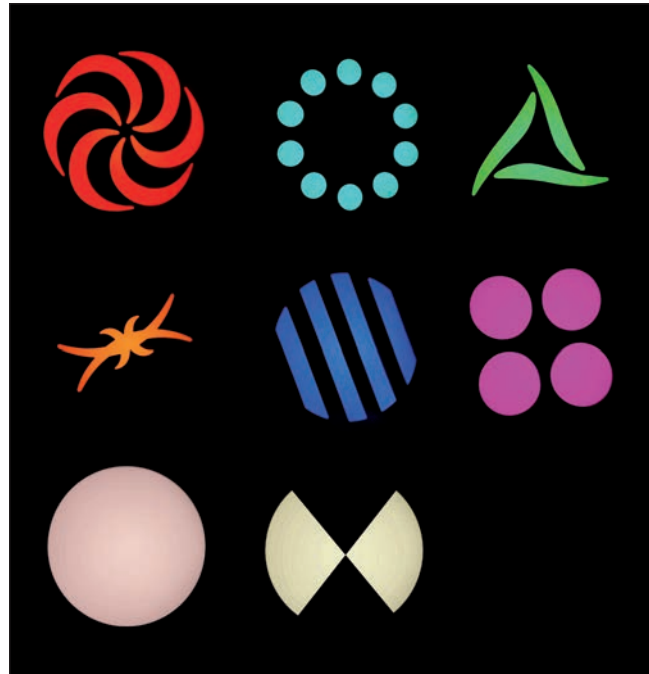

AURO SPOT 400 LED MOVING HEAD

Featuring 16-bit resolution and high speed 3-phase motors for 630° pan and 230° tilt, the Cameo Auro Spot 400 is a professional moving head with RDM capability and powerful, ultra bright single LED. The fixture sports 2 gobo wheels, rotating and fixed gobos, 2 color wheels and a choice of 3 rotating prisms enabling spectacular lighting and stunning effects with 12 intense colors, split colors and two temperatures of white.


Product number:	CLAS400
Product type:	LED Moving Light
Type:	Moving Head
Colour spectrum:	Cold white
Number of LEDs:	1
Colour temperature:	9,300 K
LED type:	180 W
Refresh rate:	3,600 Hz
Dispersion:	12°
Number of gobos:	16
Gobo Size:	Exterior Diameter: 22.9 mm - Motif: 19.5 mm
DMX input:	XLR 5-pin male, XLR 3-pin male
DMX output:	XLR 5-pin female, XLR 3-pin female
DMX mode:	5-channel, 27-channel, 19-channel
DMX Functions:	Gobo wheel, colour wheel, gobo shake, gobo rotation, stroboscope, frost, pan / tilt fine, focus, auto programs, 3 x prism, dimmer curves, dimmer, pan / tilt, motion macro
PAN movement:	540° / 630°
TILT movement:	230°
Standalone modes:	Master / slave mode, auto programs, static mode
Controls:	-, down, battery display, up, +, mode, enter
Indicators:	Colour LC display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption / Power connector:	290 W / Neutrik powerCon
Housing material:	ABS, metal
Cabinet colour:	Black
Cooling:	Temperature-controlled fan
Illuminance:	200,000 lx @ 1 m
Luminous flux:	4,470 lm
Width:	405 mm
Height:	565 mm
Depth:	285 mm
Weight:	16 kg
Other features:	2 x omega mounting, 1m power cable with Neutrik powerCON connector

NEW!



- ▶ RDM enabled moving head
- ▶ Luminous flux 4,900 lm
- ▶ High speed 3-phase motors
- ▶ 16-bit resolution
- ▶ Motor focus
- ▶ Automated positioning correction
- ▶ Battery powered display for offline configuration
- ▶ 8 intense colors, white and split colors
- ▶ 2 gobo wheels + open
- ▶ 6 rotating and 8 fixed gobos
- ▶ Rotating gobos replaceable with metal or glass gobos
- ▶ Rotating 3-facet prism
- ▶ Smooth dimming from 100 - 0% with 4 selectable curves
- ▶ 0 - 20 Hz strobe
- ▶ Temperature controlled low noise fan
- ▶ Professional connectivity with 3 and 5-pin DMX and Neutrik powerCON I/O



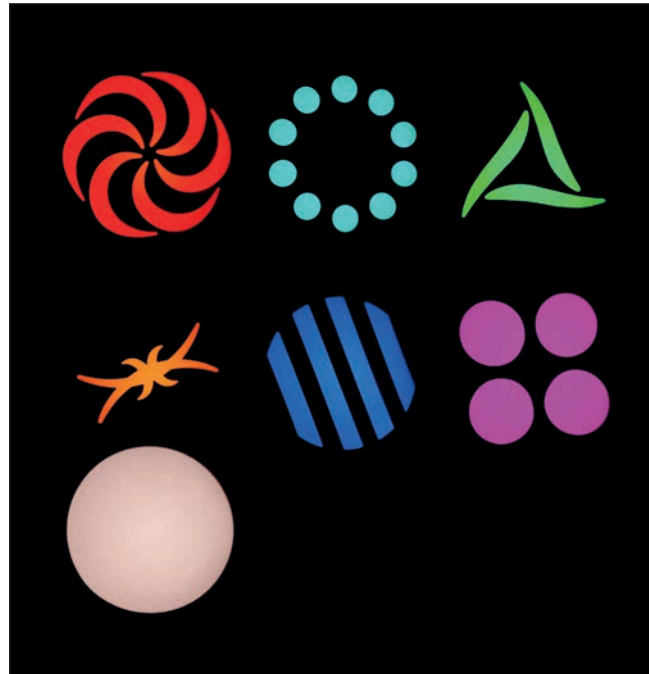

AUROSPOT 300 LED MOVING HEAD


The Cameo AuroSpot 300 is an RDM-capable ultra bright moving head with 16-bit resolution, 630° pan and 235° tilt movement and high speed 3-phase motors. It is powered by a single 180 watt LED and sports 8 intense colors plus white and split colors. A rotating 3-facet prism, 8 fixed and 6 replaceable rotating gobos provide a wide variety of awesome animated effects.

Product number:	CLAS300
Product type:	LED Moving Lights
Type:	LED Moving Heads
Colour spectrum:	Split colours, white, 8-channel multi colour
Number of LEDs:	1
Colour temperature:	9,300 K
LED type:	180 W
Dispersion:	12 - 16°
Number of gobos:	14
Gobo Size:	22.90 mm
DMX input:	XLR 3-pin male, XLR 5-pin male
DMX output:	XLR 5-pin female, XLR 3-pin female
DMX mode:	15-channel, 5-channel, 24-channel
DMX Functions:	Dimmer curve, pan, gobo wheel, gobo shake, tilt, dimmer, auto programs
PAN movement:	630°
TILT movement:	235°
High Speed Strobe:	1 - 20 Hz
Standalone modes:	Auto run, show, sound control
Controls:	Value up, enter, mode, value down
Indicators:	Colour LC display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	320 W
Power connector:	Neutrik powerCon
Housing material:	Plastic, metal
Cabinet colour:	Black
Cooling:	Temperature-controlled fan
Illuminance:	28,500 lx @ 3 m, 10,250 lx @ 5 m
Luminous flux:	4,900 lm
Width:	285 mm
Height:	480 mm
Depth:	180 mm
Weight:	8.6 kg



- ▶ RDM-enabled moving head
- ▶ 130,000 lx @ 1 m
- ▶ High-speed 3-phase motors
- ▶ 16-bit resolution
- ▶ Motor focus
- ▶ Automated positioning correction
- ▶ Battery powered display for offline operation
- ▶ 8 intense colours, white and split colours
- ▶ 6 gobos + open
- ▶ All gobos replaceable with metal or glass gobos
- ▶ Rotating 3-facet prism
- ▶ Smooth dimming from 100 - 0% with 4 selectable curves
- ▶ 0 - 20 Hz strobe
- ▶ Temperature-controlled low-noise fan
- ▶ Professional connectivity with 3- and 5-pin DMX and Neutrik powerCON I/O



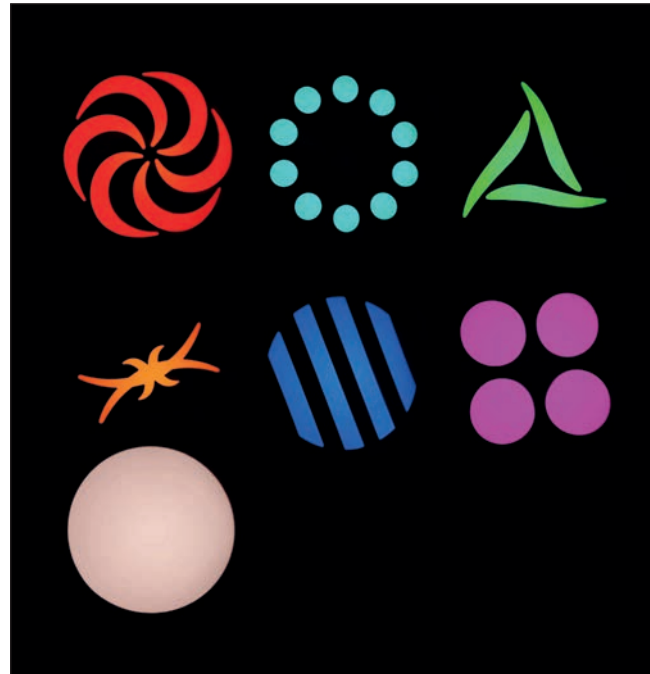

AUROSPOT 200 LED MOVING HEAD

The Cameo AuroSpot 200 is an RDM-enabled ultra-bright moving head with 16-bit resolution, 630° pan and 235° tilt movement and high-speed 3-phase motors. It is powered by a single 100 W LED and sports eight intense colours plus white and split colours, six replaceable gobos and a rotating 3-facet prism for awesome effects. The AuroSpot 200 features 5-channel, 13-channel, 22-channel DMX control modes, auto run programmes and sound activation as well as master, slave and standalone capabilities. Functions include a choice of four smooth dimming curves, shake effects and a 0 - 20 Hz cycle strobe.


Product number:	CLAS200
Product type:	LED moving light
Type:	Moving head
Colour spectrum:	8-channel multi colour, white, split-colours
Number of LEDs:	1
Colour temperature:	10,000 K
LED type:	100 W
Dispersion:	12°
Number of gobos:	6 + open
Gobo size:	Outer diameter 22.90 mm, image diameter: 19.50 mm
DMX input:	XLR 5-pol male, XLR 3-pol male
DMX output:	XLR 5-pol female, XLR 3-pol female
DMX mode:	22-channel, 13-channel, 5-channel
DMX functions:	Pan, tilt, dimmer, colour wheel, focus, gobo wheel, gobo shake, prism, auto programs, dimmer curve, macros
Pan movement:	630°
Tilt movement:	235°
High-speed strobe:	<1 Hz - 20 Hz
Standalone modes:	Auto run, show, sound control
Controls:	Mode, enter, -, +
Indicators:	Colour LC display
Operating voltage:	100 V AC - 240 V AC, 50 / 60 Hz
Power consumption:	220 W
Power connector:	Neutrik powerCON input / output
Housing material:	ABS plastic, metal
Cooling:	Silent, temperature-controlled fan
Luminous flux:	3,250 lm
Illuminance:	130,000 lx @ 1 m
Dimensions (W x H x D):	285 x 480 x 180 mm (excluding mounting bracket)



- ▶ RDM-enabled moving head
- ▶ 90,000 lx @ 1 m
- ▶ High speed 3-phase motors
- ▶ 16-bit resolution
- ▶ Motor Focus
- ▶ Automated positioning correction
- ▶ Battery powered display for offline operation
- ▶ 8 intense colours, white and split colours
- ▶ 6 gobos + open
- ▶ All gobos replaceable with metal or glass gobos
- ▶ Rotating 3-facet prism
- ▶ Smooth dimming from 100 - 0% with 4 selectable curves
- ▶ 0 - 20 Hz strobe
- ▶ Temperature-controlled low-noise fan
- ▶ Professional connectivity with 3 and 5-pin DMX and Neutrik powerCON I/O



LED MOVING HEADS

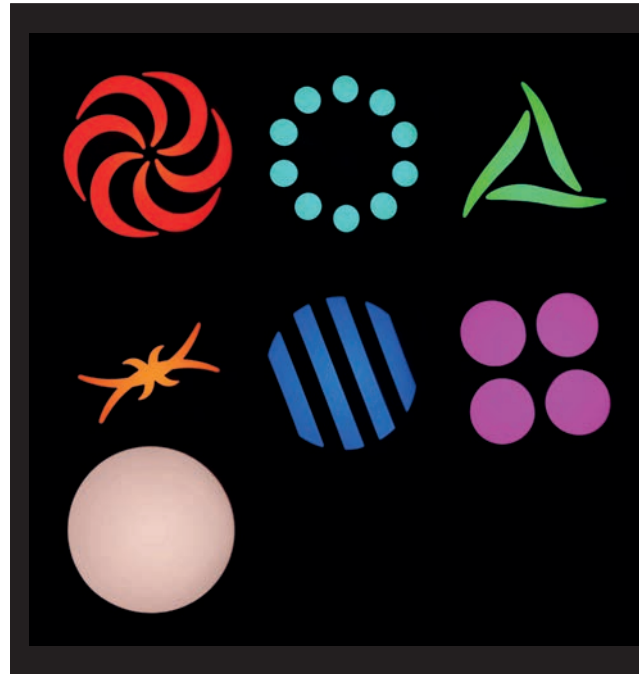

AUROSPOT 100 LED MOVING HEAD

The Cameo AuroSpot 100 is an RDM-enabled ultra-bright moving head with 16-bit resolution, 630° pan and 235° tilt movement and high-speed 3-phase motors. It is powered by a single 60 W LED and sports eight intense colours plus white and split colours, six replaceable gobos and a rotating 3-facet prism for awesome effects. The AuroSpot 100 features 5-channel, 13-channel, 22-channel DMX control modes, auto run programmes and sound activation as well as master, slave and standalone capabilities. Functions include a choice of four smooth dimming curves, shake effects and a 0 - 20 Hz cycle strobe.

Product number:	CLAS100
Product type:	LED moving light
Type:	Moving head
Colour spectrum:	8-channel multi colour, white, split-colours
Number of LEDs:	1
Colour temperature:	10,000 K
LED type:	60 W
Dispersion:	12°
Number of gobos:	6 + open
Gobo size:	Outer diameter 22.90 mm, image diameter: 19.50 mm
DMX input:	XLR 5-pol male, XLR 3-pol male
DMX output:	XLR 5-pol female, XLR 3-pol female
DMX mode:	22-channel, 13-channel, 5-channel
DMX functions:	Pan, tilt, dimmer, colour wheel, focus, gobo wheel, gobo shake, prism, auto programme, dimmer curve, macros
Pan movement:	630°
Tilt movement:	235°
High-speed strobe:	<1 Hz - 20 Hz
Standalone modes:	Auto run, show, sound control
Controls:	Mode, enter, -, +
Indicators:	Colour LC display
Operating voltage:	100 V AC - 240 V AC, 50 / 60 Hz
Power consumption:	175 W
Power connector:	Neutrik powerCON input / output
Housing material:	ABS plastic, metal
Cooling:	Silent, temperature-controlled fan
Luminous flux:	2,100 lm
Illuminance:	90,000 lx @ 1 m
Dimensions (W x H x D):	285 x 480 x 180 mm (excluding mounting bracket)


NEW!



- ▶ Ultra-bright 60 W Osram RGBW LED for saturated primary colors, subtle pastel hues and natural shades of white
- ▶ Individually controllable 4-segment RGB LED surround with single pixel control
- ▶ 2 high-speed motors for ultra-fast continuous pan and tilt
- ▶ Fantastic automated modes
- ▶ Flicker-free performance for motion picture and TV applications
- ▶ 4 selectable dimming curves
- ▶ 3 DMX modes and standalone, master or slave operation
- ▶ 2.5" TFT display and touch panel for intuitive configuration
- ▶ Omega mounting bracket included



LED MOVING HEADS

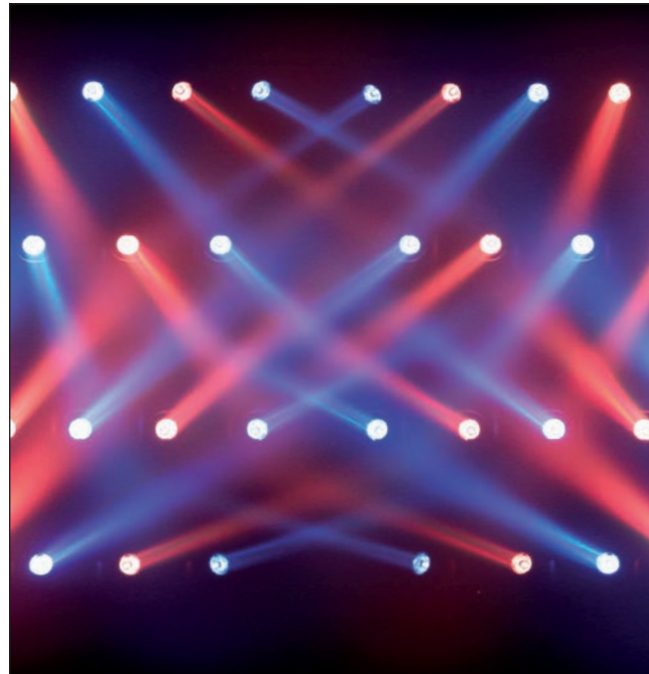

MOVIVO® BEAM 100

UNLIMITED ROTATION BEAM MOVING HEAD WITH LED RING

The Movo® beam 100 is a powerful ultra-fast moving head delivering a narrow and defined 6° beam. A central high-performance 60 watt Osram LED produces rich RGBW mixes with saturated primary colors, subtle pastel hues and natural shades of white. It is surrounded by an RGB LED ring with 4 individually controllable segments to enable a multitude of spectacular beam effects. With its 1,000 Hz refresh rate the fixture is perfect for motion picture and TV applications.


Product number:	CLMB100
Product type:	LED Moving Head
Colour spectrum:	RGBW
Number of LEDs:	1
LED type:	60 W OSRAM (approx. 50,000 operating hours)
Refresh rate:	1,000 Hz
Dispersion:	Beam Angle : 5.5° / Field Angle: 8.5°
DMX Input:	XLR 3-Pol male
DMX Output:	XLR 3-Pol female
DMX mode:	4-Channel, 15-Channel, 36-Channel
PAN movement:	Unlimited
TILT movement:	Unlimited
DMX Functions:	Pan, pan fine, pan unlimited rotation, tilt, tilt fine, tilt unlimited rotation, dimmer, dimmer fine, strobe, RGBW, colour macros, colour jumping, colour fading, CTC, auto program, pan / tilt macros, dimmer curves, pan /tilt speed (auto programs / pan & tilt macros) device settings, dimmer colour ring, strobe colour ring, RGB ring 1-4, colour ring macro, colour ring macro speed
Standalone modes:	Auto mode, static mode
Controls:	Mode, enter, value down, value up
Indicators:	2.5" TFT Display
Operating voltage:	100 - 240 V AC / 50 - 60 Hz
Power consumption:	130 W
Power connector:	Blue and white power I/O
Housing material:	ABS plastic, metal
Cooling:	Fan
Illuminance Lux @ 1m:	157,700 lux
Luminous flux:	1,480 lm
Width:	210 mm
Height:	299 mm
Length:	210 mm
Weight:	6.2 kg

NEW!



- ▶ Miniature moving head with unlimited pan and 230° tilt
- ▶ 30 W Cree RGBW LED
- ▶ Tightly focused 4° beam
- ▶ 8 show presets
- ▶ 3 modes of DMX control plus master, slave and standalone applications
- ▶ Automatic and sound activation modes
- ▶ Inverse pan and tilt mode
- ▶ 4-button display for intuitive operation
- ▶ IR remote control included
- ▶ Omega bracket for easy mounting



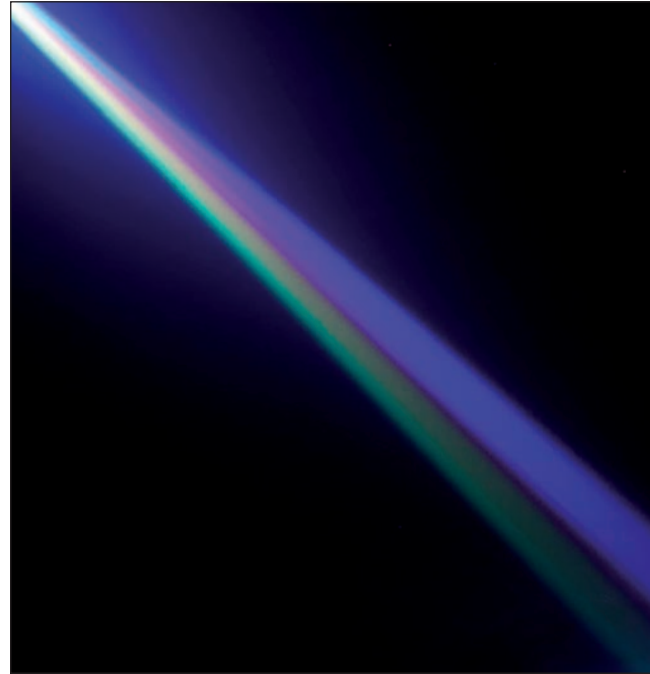

NANOBEAM 300

1 X 30 W CREE LED **RGBW** MINI MOVING HEAD WITH UNLIMITED PAN INCL. IR-REMOTE

The Cameo NanoBeam 300 is a miniature moving head equipped with a single 30 watt 4-in-1 Cree LED for colourful RGBW mixes. It features unlimited pan, 230° of tilt movement and a tightly focused 4° beam width. For amazing effects, a selectable inversion mode rotates the moving head in opposite directions when two NanoBeam 300 are used in tandem.

Product number:	CLNB300
Product type:	LED Moving Lights
Type:	LED Moving Effects
Colour spectrum:	RGBW
Number of LEDs:	1 x 4
LED type:	30 W CREE (approx. 50,000 operating hours)
Dispersion:	4°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	11-channel, 13-channel, 7-channel
DMX Functions:	Colours, dimmer, motor speed, pan / tilt, pan / tilt fine, auto programs, sound programs, strobe
PAN movement:	Unlimited
TILT movement:	230°
Standalone modes:	Auto programs, sound programs
Controls:	Enter, value up, value down, mode
Indicators:	LC display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	70 W
Power connector:	IEC power connector male
Housing material:	Metal, ABS plastic
Cabinet colour:	Black
Cooling:	Fan
Illuminance:	W= 72,000 lx @ 1 m, R= 27,500 lx @ 1 m, G= 59,000 lx @ 1 m, B=17,000 lx @ 1 m
Width:	175 mm
Height:	275 mm
Depth:	145 mm
Weight:	3 kg

NEW!



- ▶ Miniature moving head wash light
- ▶ Unlimited pan and 180° tilt
- ▶ 4 x 10 W Cree RGBW LEDs with single pixel control
- ▶ 8 show presets
- ▶ 4 modes of DMX control plus master, slave and standalone applications
- ▶ Automatic and sound activation modes
- ▶ Inverse pan and tilt mode
- ▶ 4-button display for intuitive operation
- ▶ IR remote control included
- ▶ Omega bracket for easy mounting



LED MOVING HEADS



NANOWASH 400

4 X 10 W CREE RGBW LED **MINI WASH MOVING HEAD**
WITH SINGLE PIXEL CONTROL AND UNLIMITED PAN INCL. IR-REMOTE

The Cameo NanoWash 400 is a miniature moving head that creates impressive colour washes with rich, saturated tints, subtle pastel hues and lucent shades of white. The fixture is equipped with 4 long-life 10 watt Cree RGBW LEDs and features unlimited pan and 180° of tilt. The single pixel control and switchable inversion mode which rotates the moving head in opposite directions when two units are used in tandem generate amazing visual effects.


Product number:	CLNW400
Product type:	LED Moving Lights
Type:	LED Moving Effects
Colour spectrum:	RGBW
Number of LEDs:	4 x 4
LED type:	4 x 10 W CREE (approx. 50,000 operating hours)
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	26-channel, 9-channel, 14-channel, 8-channel
DMX Functions:	Colours, auto programs, motor speed, pan / tilt, pan / tilt fine, sound programs, strobe, dimmer
PAN movement:	Unlimited
TILT movement:	180°
Standalone modes:	Sound programs, auto programs
Controls:	Enter, mode, value down, value up
Indicators:	LC display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	90 W
Power connector:	IEC power connector male
Housing material:	ABS plastic, metal
Cabinet colour:	Black
Illuminance:	R= 5,500 lx @ 1 m, W= 14,500 lx @ 1 m, total 23,300 lx @ 1 m, G= 8,000 lx @ 1 m, B= 1,300 lx @ 1 m
Width:	175 mm
Height:	232 mm
Depth:	148 mm
Weight:	3 kg



- ▶ Miniature moving head with single 12 W Cree LED
- ▶ 540°x 230° pan and tilt
- ▶ 7 colours + white
- ▶ 7 gobos + open
- ▶ 7 lightshow presets
- ▶ Dimmer and strobe effects
- ▶ 3 DMX modes plus infrared handset, standalone, master and slave operation
- ▶ 4 function keys + display for manual control
- ▶ Built-in microphone for sound control
- ▶ IR remote control included
- ▶ Comes with omega bracket for multiple mounting options



LED MOVING HEADS

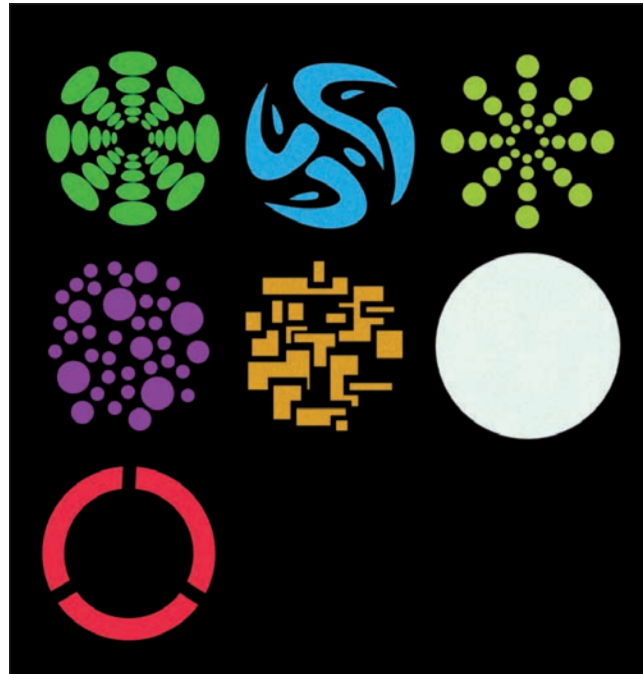

NANOSPOT 120

LED MINI MOVING HEAD 12 W

WITH IR REMOTE CONTROL


The Cameo NanoSpot 120 is a miniature moving head with 540° pan and 230° tilt that is powered by a single 12 W Cree LED. It sports a color wheel with red, orange, yellow, green, blue, cyan and purple filters, seven attractive gobos plus seven stunning lightshow presets. The NanoSpot 120 includes all the features of larger moving head models such as three DMX modes, an integrated microphone for sound activation as well as master, slave and standalone operation. Setting is easy and intuitive via the bright 4-button display.

Product number:	CLNS120
Product type:	LED moving head
Type:	Spot
Colour spectrum:	White
Number of LEDs:	1
LED type:	12 W Cree
Dispersion:	13°
DMX input:	XLR 3-pin male,
DMX output:	XLR 5-pin female,
DMX mode:	5-channel, 9-channel, 11-channel
DMX functions:	Pan / tilt fine, pan / tilt, motor speed, colour wheel, gobo wheel, dimmer, strobe, auto mode, sound mode
Pan movement:	540°
Tilt movement:	230°
Standalone modes:	Auto run, sound control
Controls:	Mode, value down, enter, value up, -, +
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	40 W
Power connector:	IEC power input / output
Housing material:	Metal, ABS plastic
Cooling:	Fan
Illuminance:	14,000 lx @ 1 m
Dimensions (W x H x D):	159 x 265 x 147 mm



- ▶ Quick sweeping 8-zone chase effect
- ▶ Dual LED bars with independent tilt and 4 lenses each
- ▶ 8 x 10 W cold white LumiEngine LEDs or cold white Cree LEDs
- ▶ Tightly focused 4.5° beam spread
- ▶ 3 or 4 modes of DMX control plus master, slave and standalone operation
- ▶ 4-button LED display for easy menu navigation
- ▶ Dimmer and strobe functions plus sound activation
- ▶ Black metal enclosure with quiet fan cooling
- ▶ Multi-voltage operation 100 – 240 V AC, 50 – 60 Hz
- ▶ Easy-mount omega bracket included



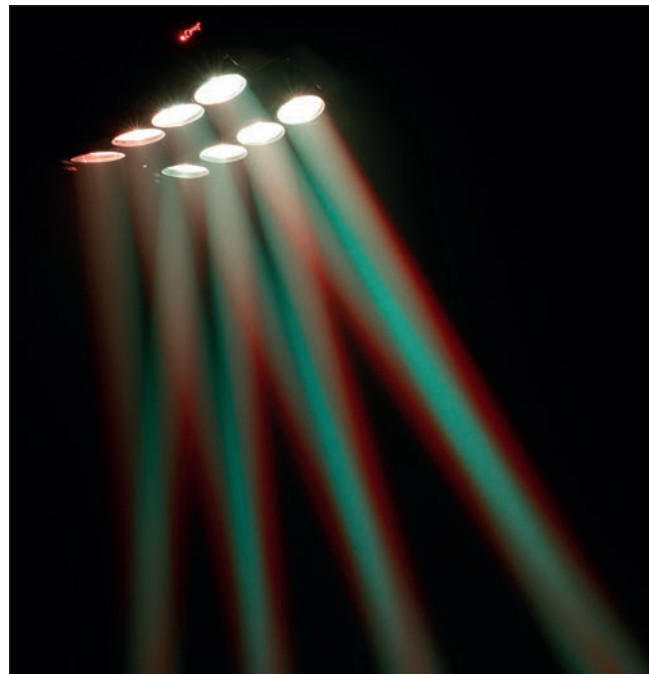

OCTAFLY RGBW

8 X 10 W RGBW LED MOVING EFFECT LIGHT

The Cameo Octaflly RGBW is a quick sweeping 8-zone chase effect with dual LED bars that are individually tiltable. They feature four 10 W quad color Cree LEDs each with a tightly focused 4.5° beam spread and single pixel control. Besides sound activation and master, slave or standalone operation, the Octaflly RGBW sports 3-channel, 7-channel, 10-channel and 36-channel modes of DMX control. It includes master dimmer and strobe functions as well as 25 pre-programmed show modes. A 4-button LED display facilitates menu navigation. The Octaflly's durable, rugged metal enclosure integrates 3-pin and IEC connectors for DMX and mains input and output plus a low-noise fan for quiet operation on 100 - 240 V AC. The chase effect fixture comes with an omega bracket for multiple mounting options.

Product number:	CLOFRGBW
Product type:	LED effect light
Type:	moving chase effect
Colour spectrum:	RGBW
Number of LEDs:	8
LED type:	10 W
Dispersion:	4.5°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	3-channel, 7-channel, 10-channel, 36-channel
DMX functions:	tilt 1, tilt 2, master dimmer, programmes (chase), programme speed, pixel control 1-8, strobe
Standalone modes:	master/slave, show 1-24
Controls:	enter, mode, value up, value down
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC / 50 – 60 Hz
Power consumption:	120 W
Power connector:	IED input/output
Housing material:	metal
Cabinet colour:	black
Cooling:	fan
Dimensions (W x H x D):	395 x 138 x 234 mm (excluding mounting bracket)



- ▶ Quick sweeping 8-zone chase effect
- ▶ Dual LED bars with independent tilt and 4 lenses each
- ▶ 8 x 10 W cold white LumiEngin LEDs with 105,000 lx each
- ▶ Tightly focused 4.5° beam spread
- ▶ 3 modes of DMX control plus master, slave and standalone operation
- ▶ 4-button LED display for easy menu navigation
- ▶ Master dimmer and strobe functions plus sound activation
- ▶ Black metal enclosure with quiet fan cooling
- ▶ Multi-voltage operation 100 - 240 V AC, 50 - 60 Hz
- ▶ Easy-mount omega bracket included





OCTAFLY W

8 X 10W COLD WHITE LED MOVING EFFECT LIGHT

The Cameo Octafly W is a quick sweeping 8-zone chase effect with dual LED bars that are individually tiltable. They feature four 10 W cold white LumiEngin-LEDs each with a powerful, bright 105,000 lx, tightly focused 4.5° beam spread and single pixel control. Besides sound activation and master, slave or standalone operation, the Octafly W sports 3-channel, 6-channel and 14-channel modes of DMX control. It includes master dimmer and strobe functions as well as 25 pre-programmed show modes. A 4-button LED display facilitates menu navigation. The Octafly's durable, rugged metal enclosure integrates 3-pin and IEC connectors for DMX and mains input and output plus a low-noise fan for quiet operation on 100 - 240 V AC. The chase effect fixture comes with an omega bracket for multiple mounting options.

Product number:	CLOFW
Product type:	LED effect light
Type:	moving chase effect
Colour spectrum:	CW (COLD WHITE)
Number of LEDs:	8
LED type:	10 W
Dispersion:	4.5°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	3-channel, 6-channel, 14-channel
DMX functions:	tilt 1, tilt 2, master dimmer, programmes (chase), programme speed, pixel control 1-8, strobe
Standalone modes:	master/slave, show 1-24
Controls:	enter, mode, value up, value down
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC / 50 - 60 Hz
Power consumption:	120 W
Power connector:	LED input/output
Housing material:	metal
Cabinet colour:	black
Cooling:	fan
Illuminance:	105,000 lx @ 1 m (1 single LED)
Dimensions (W x H x D):	395 x 138 x 234 mm (excluding mounting bracket)

NEW!



- ▶ Compact system with 6 ultra fast moving lights
- ▶ Each light with individually controllable 270° tilt
- ▶ 10W high-power Cree RGBW LEDs
- ▶ 5 DMX modes, sound activation and automatic operation
- ▶ 16 exciting auto-run programs
- ▶ 3-pin DMX and IEC power I/O for easy daisy chaining
- ▶ Omega mounting bracket included





HYDRABEAM 600 RGBW LIGHTING SET WITH 6 X 10 W CREE RGBW QUAD LED MOVING HEADS


The Cameo HydraBeam 600 RGBW combines 6 ultra fast moving lights in a single compact fixture. Projecting crisp, extremely focused beams with an angle of 4.5°, they are equipped with bright, powerful 10W quad LEDs by Cree. Each light is individually controllable for totally independent 270° tilt movement. The HydraBeam 600 RGBW features 5 modes of DMX control, sound activation and automatic operation with exciting built-in programs. It includes a high-speed strobe function that fires more than 20 intense flashes per second and master, slave and standalone capability. The solid compound construction integrates a quiet low-noise fan that keeps the HydraBeam 600 extremely cool and a 4-button display for intuitive, user-friendly configuration.

Product number:	CLHB600RGBW
Product type:	LED Moving Lights
Type:	LED Moving Effects
Colour spectrum:	RGBW
Number of LEDs:	6
LED type:	10 W Cree
Dispersion:	4.5°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	6-channel, 10-channel, 11-channel, 32-channel, 60-channel
DMX Functions:	TILT, colour change, Dimmer, strobe
Standalone modes:	Auto run, sound control
Controls:	Value Up, mode, Value Down, Enter
Indicators:	LED Display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	120 W
Power connector:	IEC power connector male, IEC power connector female
Housing material:	Metal, ABS plastic
Cabinet colour:	Black
Cooling:	Low-noise fan
Illuminance:	Blue: 4,200 lx @ 1 m, red: 10,000 lx @ 1 m, green: 22,000 lx @ 1 m, white: 36,000 lx @ 1 m
Width:	400 mm
Height:	220 mm
Depth:	240 mm
Weight:	5.5 kg



- ▶ Bar with 4 ultra-fast moving heads
- ▶ Each moving head can be controlled individually
- ▶ Powerful 10 W Cree RGBW quad LEDs
- ▶ Universal mounting options
- ▶ 2 Omega brackets and a removable tripod flange included
- ▶ 16 effective automated operating modes
- ▶ Simple operation using the four buttons and LED display



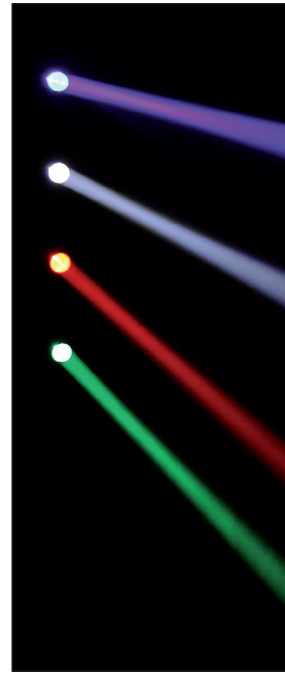

HYDRABEAM 400 RGBW LIGHTING SET WITH 4 ULTRA-FAST 10 W CREE RGBW QUAD LED MOVING HEADS


The Cameo HydraBeam 400 RGBW is a bar with four ultra-fast moving heads that can be controlled independently. They are equipped with high-intensity, 10 W quad LEDs made by the leading manufacturer Cree, providing a narrow 4.5° beam angle. The moving heads swivel by up to 540° horizontally and by up to 270° vertically, and are cooled by an extremely low-noise fan. The HydraBeam 400 can be controlled in the DMX modes with 6-channel, 10-channel, 19-channel and 32-channel, and be can used as a master, slave or standalone. The built-in microphone allows an external sound control. Sixteen automated programmes provide lively movement patterns; the strobe function will produce up to 30 flashes per second.

Product number:	CLHB400RGBW
Product type:	LED moving light
Type:	Moving head
Colour spectrum:	RGBW
Number of LEDs:	4
LED type:	10 W Cree
Dispersion:	4.5°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	6-channel, 32-channel, 19-channel, 10-channel
DMX functions:	Dimmer, pan, tilt, strobe, colour change
Pan movement:	540°
Tilt movement:	270°
High-speed strobe:	>30 Hz
Standalone modes:	Auto run, sound control
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	100 W
Power connector:	IEC power connector male
Housing material:	metal, ABS plastic
Housing colour:	black
Type of cooling:	low-noise fan
Illuminance:	Green: 19,000 lx @ 1 m, red: 10,670 lx @ 1 m, white: 27,600 lx @ 1 m, blue: 3,710 lx @ 1 m
Dimensions (W x H x D):	810 x 250 x 130 mm (excluding mounting bracket)



- ▶ 4 ultra-fast and individually controllable moving heads
- ▶ Powerful ultra-bright 10 W LUMIEngin LEDs
- ▶ Universal mounting options
- ▶ 2 Omega brackets and a removable tripod flange included
- ▶ 16 effective automated operating modes
- ▶ Simple operation using the four buttons and LED display



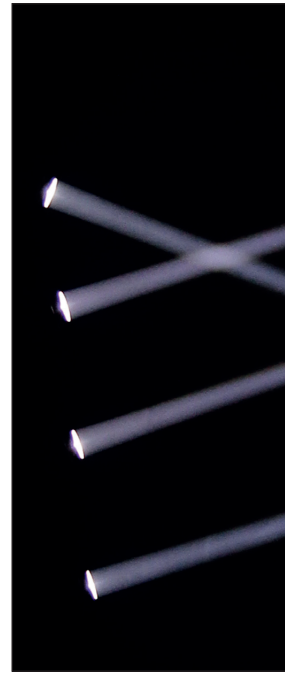

HYDRABEAM 400 W LIGHTING SET WITH 4 ULTRA-FAST 10 W LUMI-ENGINE LED MOVING HEADS


The Cameo HydraBeam 400 White is a bar with four ultra-fast moving heads that can be controlled independently. They are equipped with high-intensity, white, 10 W Lumi-Engine LEDs, providing a narrow 4.5° beam angle and 84,000 lux of light intensity. The moving heads swivel by up to 540° horizontally and by up to 270° vertically, and are cooled by an extremely low-noise fan. The HydraBeam 400 can be controlled in the DMX modes with 6-channel, 10-channel, 15-channel and 28-channel, and can be used as a master, slave or standalone. The built-in microphone allows an external sound control. Sixteen automated programmes provide lively movement patterns; the strobe function will produce up to 30 flashes per second.

Product number:	CLHB400W
Product type:	LED moving light
Type:	Moving head
Colour range:	White
Number of LEDs:	4
LED type:	10 W
Dispersion:	4.5°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	15-channel, 10-channel, 6-channel, 28-channel
DMX functions:	Pan, tilt, strobe, dimmer, colour change
Pan movement:	540°
Tilt movement:	270°
High-speed strobe:	>30 Hz
Standalone modes:	Auto run, sound control
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	100 W
Power connector:	IEC power connector male
Housing material:	Metal, ABS plastic
Housing colour:	Black
Type of cooling:	Low-noise fan
Illuminance:	84,000 lx @ 1 m
Dimensions (W x H x D):	810 x 250 x 130 mm



- ▶ Triangular moving head fixture
- ▶ 3 individually controllable ultra-fast heads
- ▶ 10 W high-power Cree RGBW quad LEDs
- ▶ Universal mounting options
- ▶ Omega bracket and detachable pole mount included
- ▶ 16 effective automated operating modes
- ▶ 5 DMX modes
- ▶ 4 button LED display for easy manual control



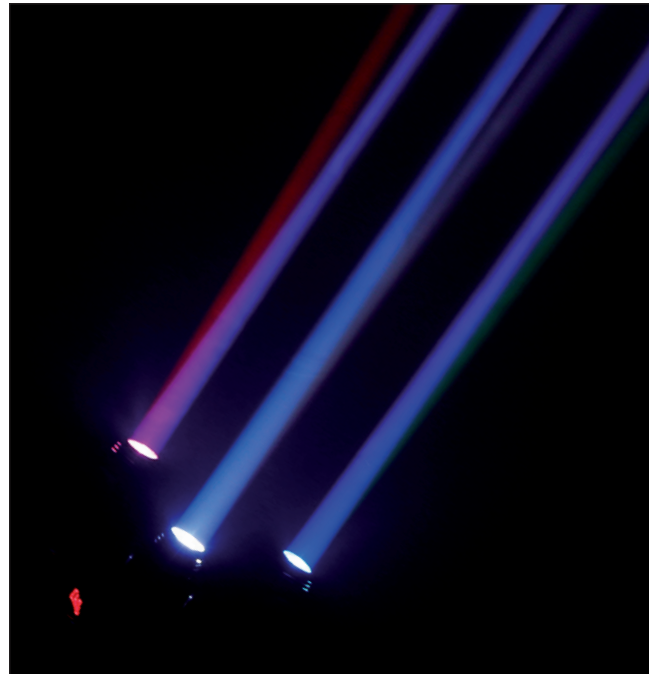

HYDRABEAM 300 RGBW LIGHTING SYSTEM WITH 3 ULTRA-FAST 10 W CREE RGBW QUAD LED MOVING HEADS


The Cameo HydraBeam 300 RGBW combines three ultra-fast, individually controllable moving heads with 540° pan and 270° tilt in a single triangular fixture. They are equipped with high-power 10 W quad LEDs by Cree providing a beam width of 4.5° each. A low-noise fan keeps the fixture cool. The HydraBeam 300 RGBW features five modes of DMX control plus sound activation. It can be used as standalone, master or slave and includes 16 automated operating modes, the strobe function fires up to 30 flashes per second.

Product number:	CLHB300RGBW
Product type:	LED moving light
Type:	Moving head
Colour spectrum:	RGBW
Number of LEDs:	3
LED type:	10 W
Dispersion:	4.5°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	36-channel, 26-channel, 16-channel, 10-channel, 6-channel
DMX functions:	Pan, tilt, strobe, colour change, dimmer, pan
Pan movement:	540°
Tilt movement:	270°
High-speed strobe:	> 30 Hz
Standalone modes:	Sound control, auto run
Controls:	Mode, value up, value down, enter
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	60 W
Power connector:	IEC power connector male
Housing material:	Metal, ABS plastic
Cooling:	Low-noise fan
Illuminance:	Red: 9,600 lx @ 1 m, green: 22,400 lx @ 1 m, blue: 4,650 lx @ 1 m, white: 31,000 lx @ 1 m
Dimensions (W x H x D):	380 x 240 x 380 mm (excluding mounting bracket)



- ▶ Triangular moving head fixture
- ▶ 3 individually controllable ultra-fast heads
- ▶ Ultra-bright white 10 W Lumi-Engin LEDs
- ▶ Universal mounting options
- ▶ Omega bracket and detachable pole mount included
- ▶ 16 effective automated operating modes
- ▶ 5 DMX modes
- ▶ 4 button LED display for easy manual control



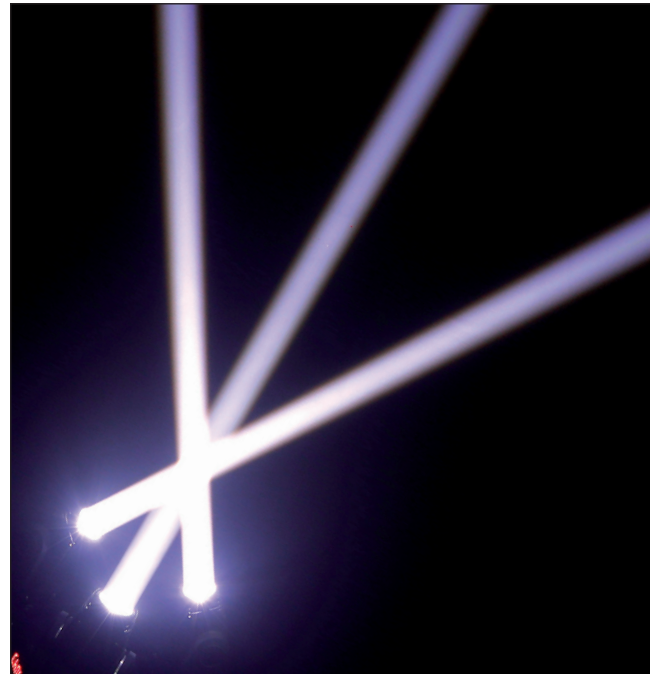

HYDRABEAM 300 W LIGHTING SYSTEM WITH 3 ULTRA-FAST 10 W LUMI-ENGINE LED MOVING HEADS

The Cameo HydraBeam 300 W combines three ultra-fast, individually controllable moving heads with 540° pan and 270° tilt in a single triangular fixture. They are equipped with ultra-bright white 10 W Lumi-Engine LEDs providing a beam width of 4.5° each and a total of 92,000 lx. A low-noise fan keeps the fixture cool. The HydraBeam 300 W features 5 modes of DMX control plus sound activation. It can be used as standalone, master or slave and includes 16 automated operating modes, the strobe function fires more up to 30 flashes per second. The rugged black construction of steel and ABS sports a backlit display with four buttons for easy manual control. The Cameo HydraBeam 300 W operates on 100 – 240 V AC and comes with an omega bracket and detachable pole mount for universal mounting options.


Product number:	CLHB300W
Product type:	LED moving light
Type:	Moving head
Colour spectrum:	White
Number of LEDs:	3
LED type:	10 W
Dispersion:	4.5°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	27-channel, 22-channel, 12-channel, 10-channel, 6-channel
DMX functions:	Pan, tilt, strobe, colour change, dimmer
Pan movement:	540°
Tilt movement:	270°
High-speed strobe:	> 30 Hz
Standalone modes:	Sound control, auto run
Controls:	Mode, value up, value down, enter
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	60 W
Power connector:	IEC power connector male
Housing material:	Metal, ABS plastic
Cooling:	Low-noise fan
Illuminance:	92,000 lx @ 1 m
Dimensions (W x H x D):	380 x 240 x 380 mm (excluding mounting bracket)

NEW!



- ▶ Compact ultra-fast moving head
- ▶ Powerful 10W Cree RGBW LED
- ▶ 5 modes of DMX control
- ▶ Standalone, master and slave capability
- ▶ 4 effective automated operating modes
- ▶ Built-in microphone for sound activation
- ▶ 4-button LED display for easy menu navigation and setting



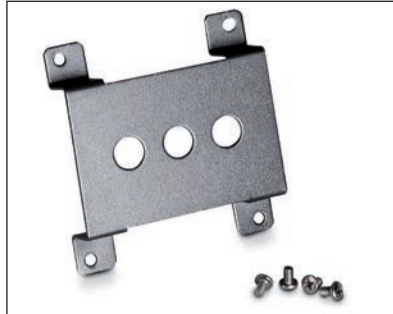

HYDRABEAM 100 RGBW LIGHTING SYSTEM WITH 1 ULTRA-FAST 10 W CREE RGBW QUAD LED MOVING HEADS

The Cameo HydraBeam 100 RGBW is an ultra-fast, compact moving head with 540° pan, 270° tilt and 4.5° beam width powered by a bright 10 watt 4-in-1 Cree LED. The fixture features 5 modes of DMX control, a built-in microphone for sound activation and 4 automated operating modes. It includes standalone, master and slave capability along with dimmer and high-speed strobe functions. A 4-button display enables easy menu navigation and setting. The rugged construction of steel and ABS sports a low-noise fan for cool and quiet operation, 3-pin DMX connectors and an IEC mains inlet. The HydraBeam 100 RGBW runs on 100 – 240 volts AC and weighs in under 2 kg.


Product number:	CLHB100RGBW
Product type:	LED Moving Lights
Type:	LED Moving Effects
Colour spectrum:	RGBW
Number of LEDs:	1
LED type:	10 W
Dispersion:	4.5°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	12-channel, 14-channel, 3-channel, 6-channel, 9-channel
DMX Functions:	Strobe, PAN, Dimmer, colour change, TILT
PAN movement:	540°
TILT movement:	270°
High Speed Strobe:	20Hz
Standalone modes:	Auto programs, sound programs
Controls:	Value Up, Value Down, mode, Enter
Indicators:	LED Display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	20 W
Power connector:	IEC power connector male
Housing material:	ABS plastic, metal
Cabinet colour:	Black
Cooling:	Low-noise fan
Illuminance:	Red: 7,000 lx @ 1 m, blue: 4,100 lx @ 1 m, white: 32,500 lx @ 1 m, green: 27,000 lx @ 1 m
Width:	100 mm
Height:	240 mm
Depth:	160 mm
Weight:	1 kg

NEW!



- ▶ 144 tri-colour SMD 5050 LEDs for excellent colour rendering
- ▶ 25 mm pixel pitch and wide 120° viewing angle
- ▶ Intuitive pixel mapping and video
- ▶ Easy control and auto-configuration using ArKaos Kling-Net
- ▶ Art-Net 3 compliant, 2 DMX and standalone modes
- ▶ 3,400 Hz refresh rate for flicker-free performance
- ▶ Convection cooling for noiseless operation
- ▶ Anodized aluminium housing with safety eye
- ▶ Hardware linking system for seamless tile combinations
- ▶ Includes clear, frost, milk and black LED cover plates, power cord and adjustable mounting bracket



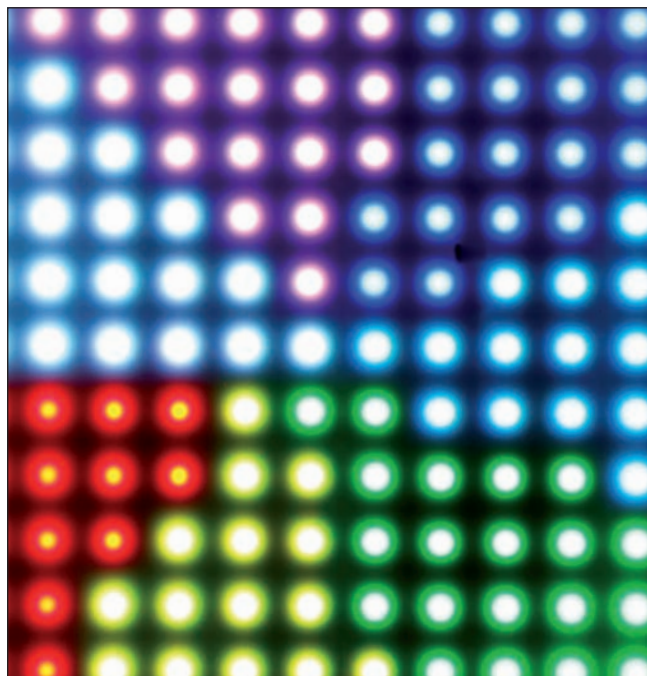

KLING TILE 144 LED PIXEL PANEL


The Kling® Tile 144 is a square video and pixel mapping panel with 144 tri-colour SMD 5050 LEDs in a 12 x 12 array, 25 millimeter pixel pitch and wide 120° viewing angle. It provides superb RGB colour rendering, flicker-free performance with a 3,400 Hz refresh rate and includes four interchangeable LED cover plates (clear, frost, milk and black). The Kling® Tile is automatically configured and easily controlled using the ArKaos Kling-Net protocol. It is Art-Net 3 compliant and sports 8-channel and 432-channel DMX modes with single pixel control, strobe and dimming functions plus automated standalone modes.

Product number:	CLKLINGT144
Product type:	LED Lighting Effects
Type:	LED Effect Lights
Colour spectrum:	RGB
Number of LEDs:	144
LED type:	5050 SMD
Dispersion:	120°
Refresh rate:	3,400 Hz
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	432-channel, 8-channel
DMX Functions:	Strobe, single pixel control, auto programs, colour macro, dimmer, RGB
Standalone modes:	Auto programs, static colour
Controls:	Value up, value down, mode, Enter
Indicators:	LC display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	65 W
Power connector:	Blue and white power I/O
Housing material:	Aluminium
Cooling:	Convection
Cabinet colour:	Black
Dimensions without mounting bracket	
Width:	300 mm
Height:	300 mm
Depth:	117 mm
Weight:	3.1 kg
Accessories (included):	CAT6 Cable 1.5 m, incl. installation material



- ▶ 5 x 5 LED Matrix Panel with single pixel control
- ▶ 25 x 3 W warm white LEDs
- ▶ 4 DMX modes, sound activation
- ▶ Master, slave and standalone capability
- ▶ Blinder, chase and strobe effects
- ▶ Alphabetic character and numeral mapping
- ▶ 4 selectable dimming curves
- ▶ Noiseless and flicker-free operation
- ▶ Ultra flat enclosure
- ▶ Even more impressive in multiples



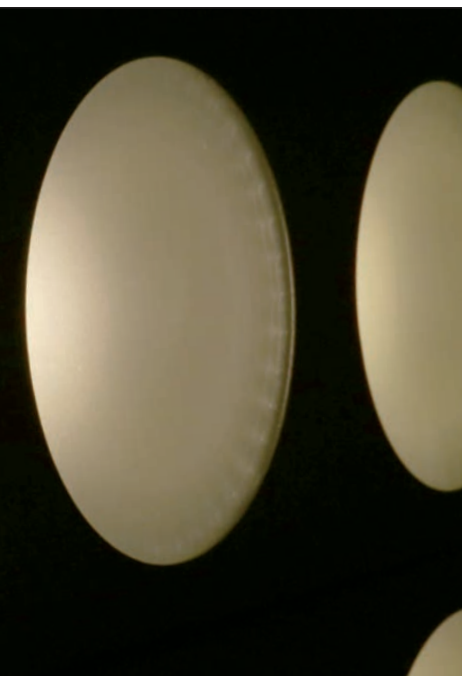

MATRIX PANEL 3 WW

5 X 5 LED **MATRIX PANEL** WITH SINGLE PIXEL CONTROL


With a 5 x 5 array of warm white 3 watt LEDs and flicker-free performance the Cameo Matrix Panel creates exciting blinder, chase and strobe effects. Featuring powerful single pixel control it is the perfect choice for mapping alphabetic characters, numerals and complete messages. Recessed latches on all sides enable connecting multiple panels for large, impressive backdrops.




Product number:	CLMP3WW
Product type:	LED Lighting Effects
Type:	LED Effect Lights
Colour spectrum:	Warm white
Colour temperature:	3,300 K
Number of LEDs:	25
LED type:	3 W Single LED
Dispersion:	40°
Refresh rate:	3,400 Hz
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	5-channel, 2-channel, 10-channel, 28-channel
DMX Functions:	Sound programs, stroboscope, auto programs, dimmer fine, master dimmer
Standalone modes:	Music control, master / slave mode
Controls:	Enter, mode, up, down
Indicators:	4-digit LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	100 W
Fuse:	F5 A / 250 V
Operating Temperature:	10 - 40°C
Power connector:	Blue and white power I/O
Housing material:	Metal
Cabinet colour:	Black
Cooling:	Convection
Illuminance:	6,100 lx @ 1m
Width:	580 mm
Height:	580 mm
Depth:	67 mm
Weight:	8 kg
Other features:	Swivel bracket, 2 x omega mounting, security lock slot

NEW!



- ▶ Powerful 60 watt RGBW COB LED
- ▶ Plano-convex lens
- ▶ Continuously variable manual zoom for 9° - 41° beam angle
- ▶ RDM capable
- ▶ 19,800 lux @ 1 m
- ▶ Flicker-free performance
- ▶ Rugged metal housing
- ▶ Includes rotatable barn doors and filter frame

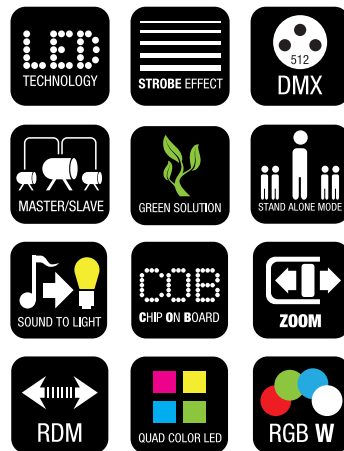

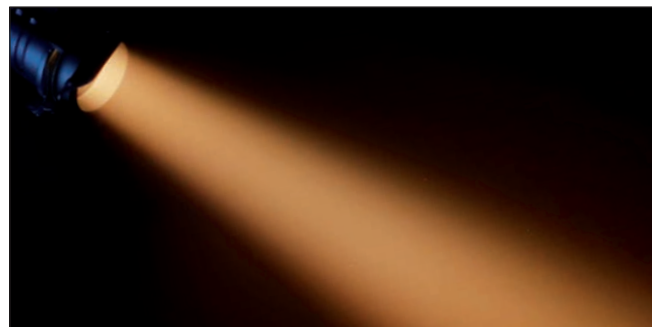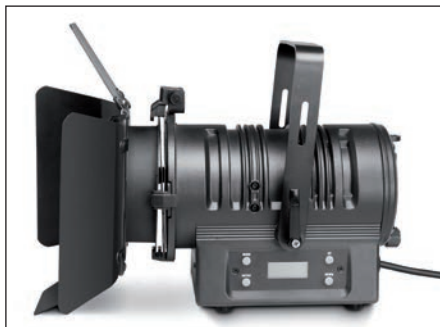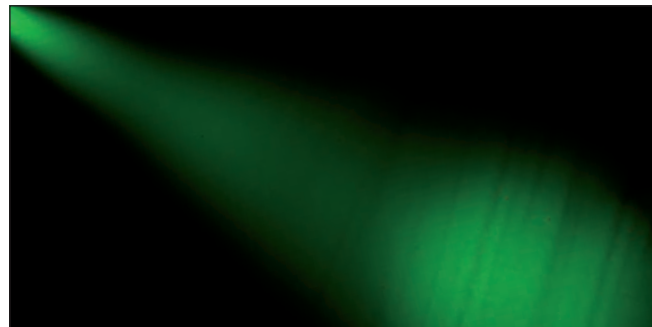

THEATRE SPOT 60 RGBW

THEATRE SPOTLIGHT

WITH PC LENS AND 60W RGBW LED

The Cameo TS 60 RGBW is a versatile theatre spotlight with plano-convex lens and manual zoom for easy spot-to-flood focus adjustment. Delivering a soft-edged beam with continuously variable 9° to 41° angle, the RDM-capable fixture is equipped with a single 60 watt RGBW LED for a powerful illuminance of 19,800 lux at 1 metre distance. The spotlight's DMX functions include a high-speed strobe with adjustable flash rate from 1 - 20 Hz and a selection of dimming curves. Sound activation and built-in automated programs permit standalone operation while the 3,600 Hz refresh rate ensures flicker-free performance.


Product number:	CLTS60RGBW
Product type:	LED lighting system
Type:	Theater spot
Colour spectrum:	RGBW
Number of LEDs:	1
Refresh rate:	3,600 Mhz
Beam Angle:	9° - 41°
Field Angle:	16° - 49°
DMX input:	XLR 3-pin female
DMX output:	XLR 3-pin female
RDM:	Yes
Protocols:	USITT DMX-512
DMX mode:	5
DMX Functions:	Dimmer strobe, RGBW, colour macros, CTO, auto program, sound, dimmer curves
Wireless DMX:	No
Flash Rate Strobe:	1-20 Hz
Standalone modes:	Sound, slave, auto program, static
Controls:	Mode, up, down, enter
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	65 W
Power Input:	Power cord with safety plug (Type E / CEE 7/7)
Cooling:	Temperature controlled fan
Operating Temperature:	0 - 40°C
Illuminance:	19,800 Lux 1 m
Luminous flux:	910 Lumen
Dimensions (W x H x L):	145 x 205 x 240 mm
Weight:	3.6 kg
Other features:	No

NEW!



- ▶ Powerful 40 watt warm white LED
- ▶ Plano-convex lens
- ▶ Continuously variable manual zoom for 14° - 38° beam angle
- ▶ RDM capable
- ▶ 18,000 lux @ 1 m
- ▶ 3,200 K color temperature
- ▶ CRI >90
- ▶ Flicker-free operation
- ▶ Rugged metal housing with convection cooling
- ▶ Includes rotatable barn doors and filter frame



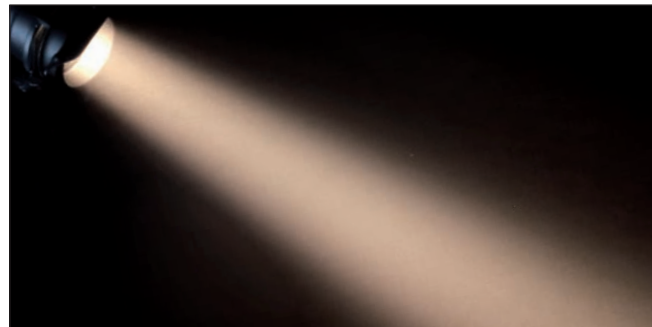

THEATRE SPOT 40 WW

THEATRE SPOTLIGHT


WITH PC LENS AND 40 WATT WARM WHITE LED

The Cameo TS 40 WW is a versatile theatre spotlight with plano-convex lens and manual zoom for easy spot-to-flood focus adjustment. Delivering a soft-edged beam with continuously variable 14° to 38° angle, the RDM-capable fixture is powered by a single 40 watt warm white LED. It sports a colour temperature of 3,200 K and 18,000 lux illuminance at 1 metre distance. The spotlight's DMX functions include a high-speed strobe with adjustable flash rate from 1 - 20 Hz and a selection of dimming curves.

Product Number:	CLTS40WW
Product type:	LED lightning system
Type:	Theater Spot
Colour spectrum:	Warm white
Number of LEDs:	1
Colour temperature:	3,200 K
CRI:	>90
LED type:	Warm White 40 W
Refresh rate:	1,200 Mhz
Beam Angle:	14° - 38°
Field Angle:	20° - 48°
DMX input:	XLR 3-pin female
DMX output:	XLR 3-pin female
Protocols:	USITT DMX-512
DMX mode:	3
DMX Functions:	Dimmer, strobe, dimmer curves
Wireless DMX:	No
Flash Rate Strobe:	1-20 Hz
Standalone modes:	Static
Controls:	Mode, Up, Down, Enter
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	40 W
Power Input:	Power cord with safety plug (Type E / CEE 7/7)
Cooling:	Convection
Operating Temperature:	0 - 40°C
Illuminance:	18,000 Lux @ 1 m
Luminous flux:	1,570 Lumen
Dimensions (W x H x L):	145 x 205 x 240 mm
Weight:	3.6 kg



- ▶ 12 x 10 W ultra high-power 6-in-1 RGBAW+UV LEDs
- ▶ Highest flexibility for perfect mixing of solid and pastel colours to warm rich colours and ultra violet
- ▶ Flicker-free
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing

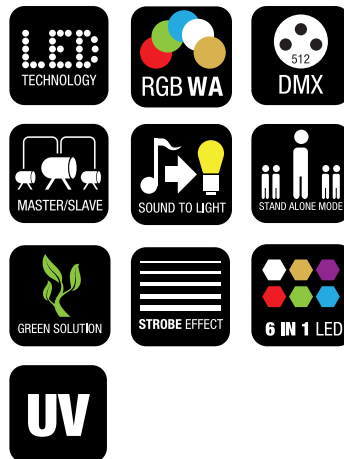



UV LIGHT

PAR 64 CAN RGBWA+UV

12 X 10 W LED PAR CAN RGBWA+UV

IN POLISHED OR BLACK HOUSING

The Cameo CLP64RGBWAU10WPS/BS is a professional PAR 64 light with 25° beam angle and 3,000 Hz refresh rate for flicker-free performance. Available in polished or black aluminium, it is equipped with twelve ultra-bright 10 W 6-in-1 LEDs. Their RGBWA+UV spectrum enables rich and highly flexible colour mixing. The high performance CLP64RGBWAU10WPS/BS features 2-channel, 3-channel 1, 3-channel 2, 6-channel and 9-channel DMX modes and sound control. With numerous functions and integrated programmes it also provides master, slave and standalone use. The backlit LC display and mode, enter, up and down controls facilitate operation. The CLP64RGBWAU10WPS/BS comes with adjustable twin brackets for variable mounting and a fixed power cord with grounding safety plug. It can be powered from any 110 - 250 V AC source.

Product number:	CLP64RGBWAU10WPS (polished housing) / CLP64RGBWAU10WBS (black housing)
Product type:	LED PAR can
Type:	PAR 64
Colour range:	RGBWA + UV
Number of LEDs:	12
LED type:	10 W 6-in-1 colour
Beam angle:	25°
DMX input:	XLR 3-pin
DMX output:	XLR 3-pin
DMX mode:	2-channel, 3-channel 1, 3-channel 2, 6-channel, 9-channel
DMX functions:	Colour fade, colour jump, master dimmer, RGBWA+UV, sound control, strobe
Standalone modes:	Colour jump, colour fade, slave mode, sound control, static colour, colour macro
Controls:	Mode, value down, value up, enter
Indicators:	Backlit LC display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Aluminium
Housing colour:	Polished / black
Type of cooling:	Fan
Illuminance:	16,000 lx @ 1 m
Dimensions (W x H x L):	260 x 280 x 300 mm (excluding mounting bracket)



- ▶ 18 x 8 W ultra high-power quad RGBW LEDs
- ▶ RGBW for perfect mixing of solid and pastel colours
- ▶ Operated via DMX, in master / slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing





PAR 64 CAN Q 8W

18 X 8W QUAD COLOUR LED PAR CAN RGBW IN POLISHED OR BLACK HOUSING


An extremely powerful LED PAR in a black or polished housing. The Cameo CLP64Q8WBS/PS has a total of 18 quad LEDs (RGBW) and thus guarantees perfect mixing of solid and pastel colours – including white. With a power consumption of just 170 W, the 8 W quad LEDs produce an impressive level of brightness with a beam angle of 25°. It is quick and easy to operate using four buttons and an LED display on the back. The CLP64Q8WBS/PS is equipped with a super-quiet fan for cooling. The dual bracket permits simple use as a floor PAR. There are three operating modes. In addition to DMX operation with 2, 3, 4 or 7 channels, this LED PAR can also be operated in standalone mode or via sound control. It features an integrated microphone.

Product number:	CLP64Q8WPS (polished housing) / CLP64Q8WBS (black housing)
Product type:	LED PAR can
Type:	PAR 64
Colour range:	RGBW
Number of LEDs:	18
LED type:	8 W quad colour
Beam angle:	25°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	2/3/4/7-channel selectable
DMX functions:	RGBW, master dimmer, strobe, sound control, colour jump, colour fade
Standalone modes:	Static colour, colour fading, colour jump, sound control, slave
Controls:	Enter, mode, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Aluminium
Housing colour:	Polished/black
Type of cooling:	Fan
Illuminance:	20,900 lx @ 1 m
Dimensions (W x H x L):	260 x 270 x 305 mm (excluding mounting bracket)



- ▶ 9 x 8 W ultra high-power quad RGBW LEDs
- ▶ RGBW for perfect vibrant and pastel colours
- ▶ Operation via DMX, in master/slave mode or as a single projector
- ▶ Built-in microphone for sound-control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double mounting bracket included in the delivery
- ▶ Rugged, compact aluminium housing



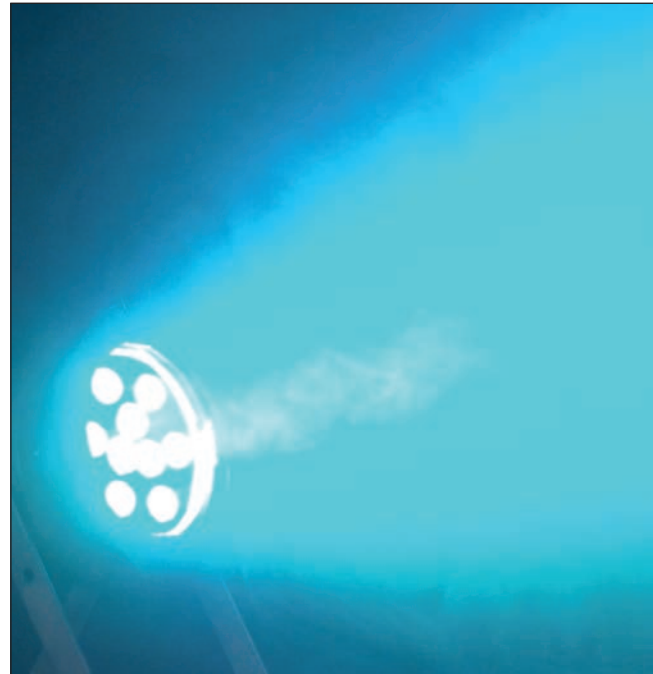

PAR 56 CAN Q 8W

9 X 8W QUAD COLOUR LED RGBW PAR LIGHT IN POLISHED OR BLACK HOUSING

The Cameo CLP56Q8WPS is a professional PAR56 projector in classic matt black aluminium housing with nine extremely bright, 8 W powerful RGBW LEDs. The energy-efficient, long-life quad colour light-emitting diodes produce rich colours and subtle pastel tones with an illuminance of 12,200 lux and a 25° beam angle. The CLP56Q8WPS can be controlled in the DMX-modes with 2-channel, 3-channel 1, 3-channel 2, 4-channel and 7-channel and be used as a master, slave or standalone. It is easily operated via a clear LED display and buttons for mode, input, up and down. A built-in microphone allows the PAR can to be controlled through music. 3-pin XLR-sockets are used as DMX input and output control in series. The Cameo CLP56Q8WPS is effectively cooled by a large, smooth-running low-speed fan. It can be operated universally with mains voltages from 100 to 240 V; the power consumption is a low 75 W.

Product number:	CLP56Q8WPS (polished housing) / CLP56Q8WBS (black housing)
Product type:	LED PAR Lighting
Type:	Indoor
Colour spectrum:	RGBW
Number of LEDs:	9
LED type:	8 W QUAD Colour
Refresh rate:	1,100 Hz
Dispersion:	25°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	7-channel, 3-channel 2, 2-channel, 3-channel 1, 4-channel
DMX Functions:	Colour fade, strobe, RGBW, sound control, master dimmer, colour macro, colour jump
Standalone modes:	Slave mode, colour macro, colour jump, colour fade, static colour, sound control
Controls:	Value Down, Value Up, Enter, mode
Indicators:	LED Display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	75 W
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Aluminium
Cabinet colour:	Polished
Cooling:	Large low-speed fan
Illuminance:	12,200 lx @ 1 m



- ▶ 36 x 3 W ultra high-power RGB LEDs
- ▶ Low-power consumption
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the three buttons and LED display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing





PAR 64 CAN RGB 3W 36 X 3W **LED PAR CAN** RGB IN POLISHED OR BLACK HOUSING

Extremely high-powered LED PAR in a black, short housing. Equipped with dual brackets and a filter frame holder. The Cameo CLP64RGB3WBS/PS has a total of 36 ultra-bright 3 W LEDs (12 x red, 12 x green, 12 x blue) – for perfect colour mixing and rich solid colours. The beam angle is 30°. It is operated using three buttons and an LED display on the back. The CLP64RGB3WBS/PS is equipped with a super-quiet fan for cooling. There are three operating modes. In addition to DMX operation with 2, 3, 4 or 6 channels, this LED PAR can also be operated in standalone mode or via sound control. It has a built-in microphone. The CLP64RGB3WBS/PS has a power consumption of just 150 W, runs on mains voltages of 100 to 250 V, and thus can be used universally and worldwide.

Product number:	CLP64RGB3WPS (polished housing) / CLP64RGB3WBS (black housing)
Product type:	LED PAR can
Type:	PAR 64
Colour range:	RGB
Number of LEDs:	36
LED type:	3 W
Beam angle:	30°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	4/6-channel selectable
DMX functions:	RGB, master dimmer, strobe, sound control, colour jump, colour fade
Standalone modes:	Static colour, colour fading, colour jump, sound control, slave
Controls:	Mode, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Aluminium
Housing colour:	Polished / black
Type of cooling:	Fan
Illuminance:	19,500 lx @ 1 m
Dimensions (W x H x L):	260 x 270 x 305 mm (excluding mounting bracket)



- ▶ 18 x 3 W high-power tri-RGB LEDs
- ▶ Low power consumption
- ▶ Operated via DMX, in master / slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing





PAR 64 CAN TRI 3 W 18 X 3 W **TRI-COLOUR LED PAR CAN** RGB IN POLISHED OR BLACK HOUSING


Ultra-high performance LED PAR 64 with 18 ultra-bright 3 W tri-colour LEDs in a black or polished housing. This high-performance LED PAR has a beam angle of 25° and a power consumption of just 60 W. Like all new LED PAR cans, the CLP64TRI3WBS/PS features a sturdy housing. The double bracket makes this PAR can the ideal lamp for use as a floor PAR or for mounting to cross-beams and bars. It is actuated either via the DMX protocol (3-pin XLR) with six control channels, in master/slave mode or standalone mode (sound control, colour change, static colours). It features an integrated microphone and is quick and easy to operate using four buttons and an LED display.

Product number:	CLP64TRI3WPS (polished housing) / CLP64TRI3WBS (black housing)
Product type:	LED PAR can
Type:	PAR 64
Colour range:	RGB
Number of LEDs:	18
LED type:	3W tri-colour
Beam angle:	25°
DMX input:	XLR 3-pin
DMX output:	XLR 3-pin
DMX mode:	6-channel
DMX functions:	RGB, master dimmer, strobe, sound control, colour jump, colour fade
Standalone modes:	Static colour, colour change, colour fading, sound control, slave
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Aluminium
Housing colour:	Polished/black
Type of cooling:	Fan
Illuminance:	11,300 lx @ 1 m
Dimensions (W x H x L):	260 x 280 x 300 mm (excluding mounting bracket)



- ▶ 9 x 3 W high-power RGB tri-LEDs
- ▶ Low power consumption
- ▶ Operated via DMX, in master / slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing



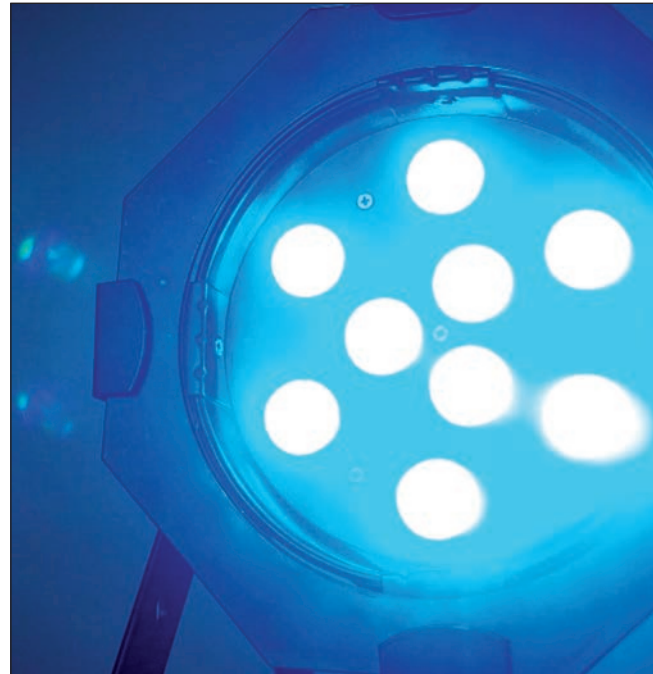

PAR 56 CAN TRI-RGB 3W **9X3W TRI-COLOUR LED PAR CAN RGB** **IN POLISHED OR BLACK HOUSING**


Ultra-high performance LED PAR 56 with nine extremely bright 3 W tri-colour LEDs in a black or polished housing. This high-performance LED PAR has a beam angle of 25° and a power consumption of just 40 W. Like all new LED PAR cans, the CLP56TRI3WBS/PS features a sturdy housing. The double bracket makes this PAR can the ideal lamp for use as a floor PAR or for mounting to cross-beams and bars. It is actuated either via the DMX protocol (3-pin XLR) with six control channels, in master/slave or standalone mode (sound control, colour change, solid colours). It features an integrated microphone and is quick and easy to operate using four buttons and an LED display.

Product number:	CLP56TRI3WPS (polishes housing) / CLP56TRI3WBS (black housing)
Product type:	LED PAR can
Type:	PAR 56
Colour range:	RGB
Number of LEDs:	9
LED type:	3W tri-colour
Beam angle:	25°
DMX input:	XLR 3-pin
DMX output:	XLR 3-pin
DMX mode:	6-channel
DMX functions:	RGB, master dimmer, strobe, colour jump, colour fade
Standalone modes:	Static colour, colour change, colour fading, sound control, slave
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Aluminium
Housing colour:	Polished / black
Type of cooling:	Convection
Illuminance:	7,400 lx @ 1 m
Dimensions (W x H x L):	230 x 250 x 260 mm (excluding mounting bracket)



- ▶ Powerful 177 x 10 mm RGBA LEDs
- ▶ RGBA for warm, rich colour mixing
- ▶ Operated via DMX, in master / slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing



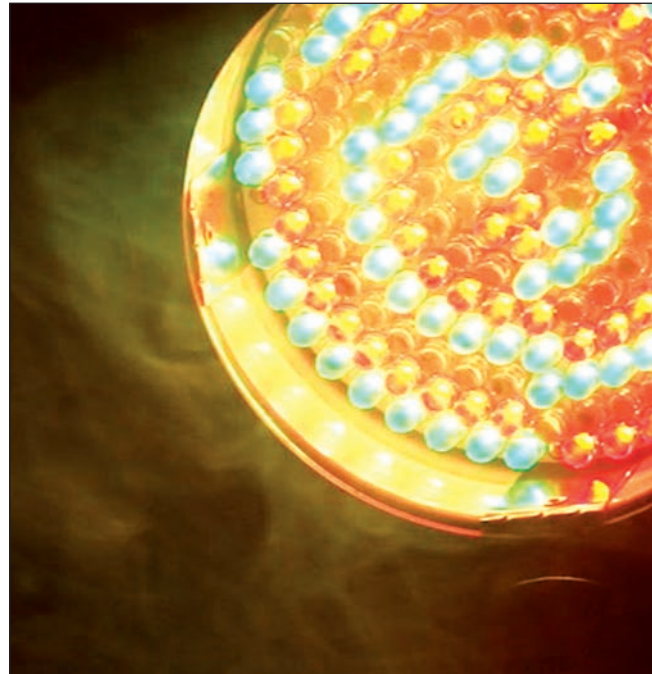

PAR 64 CAN RGB 10

177 X 10MM LED PAR CAN RGB

IN POLISHED OR BLACK HOUSING

The Cameo CLP64RGB10BS/PS is a professional PAR 64 spotlight in a traditional aluminium housing with 177 bright, long-lasting 10 mm LEDs in the colours red, green, blue, and amber (RGBA system). Two adjustable brackets with knurled locking screws permit use as a floor spot and mounting on traverses, walls, and ceilings. The beam angle is 25°. The CLP64RGB10BS/PS can be controlled in 7-channel DMX mode or in standalone mode, in each case with six functions. It is operated using buttons for mode, enter, up, and down. A 4-position LED display indicates the corresponding setting. XLR sockets serve as DMX inputs and outputs for controlling several spotlights in series. Additional advantages are a low power consumption of just 30 W and minimal generation of heat. The spotlight is available in black or polished.

Product number:	CLP64RGB10PS (polished housing) / CLP64RGB10BS (black housing)
Product type:	LED PAR can
Type:	PAR 64
Colour range:	RGBA
Number of LEDs:	177
LED type:	10 mm
Beam angle:	25°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	7-channel
DMX functions:	RGBA, master dimmer, strobe, colour jump, colour fade
Standalone modes:	Static colour, colour change, colour fading, sound control, slave mode
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Aluminium
Housing colour:	Polished/black
Type of cooling:	Convection
Illuminance:	2,600 lx @ 1 m
Dimensions (W x H x L):	265 x 270 x 280 mm (excluding mounting bracket)



- ▶ Powerful 183 x 10 mm RGB LEDs
- ▶ Low power consumption
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the three buttons and LED display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing





PAR 64 CAN RGB 10

183 X 10 MM LED PAR CAN RGB

IN POLISHED OR BLACK HOUSING

Professional PAR can with 183 ultra-bright 10 mm LEDs in the RGB colour system (60 x red, 60 x green, 63 x blue) in a conventional sturdy aluminium housing and with a beam angle of 25°. Featuring a double bracket, the CLP64RGB10BS/PS PAR is suitable for use both as a floor PAR and for mounting to cross-beams and bars. Actuation is either via the DMX protocol (3-pin XLR) with four or six control channels, in master/slave mode or standalone mode (sound control, colour change, solid colours). It is controlled by three buttons and an LED display. Its power consumption is a mere 30 W.

Product number:	CLP64RGB10PS (polished housing) / CLP64RGB10BS (black housing)
Product type:	LED PAR can
Type:	PAR 64
Colour range:	RGB
Number of LEDs:	183
LED type:	10 mm
Beam angle:	25°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	4 / 6-channel selectable
DMX functions:	RGB, master dimmer, strobe, sound control, colour jump, colour fade
Standalone modes:	Static colour, colour change, colour fading, sound control, slave
Controls:	Mode, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Aluminium
Housing colour:	Polished / black
Type of cooling:	Convection
Illuminance:	2,050 lx @ 1 m
Dimensions (W x H x L):	265 x 270 x 280 mm (excluding mounting bracket)



- ▶ 108 powerful 10 mm RGB LEDs
- ▶ Low power consumption
- ▶ Operated via DMX, in master / slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the three buttons and LED display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing



LED STANDARD PAR CANS




PAR 56 CAN RGB 10 MM

108 X 10 MM **LED PAR CAN** RGB
IN POLISHED OR BLACK HOUSING



Professional PAR can with 108 ultra-bright LEDs (36 x red, 36 x green, 36 x blue) and RGB colour system in a sturdy aluminium housing and a beam angle of 25°. Featuring a double bracket, the CLP56RGB10PS/BS is suitable for use both as a floor PAR and for mounting to cross-beams and bars. It is actuated either via DMX protocol (3-pin XLR) with three and six control channels, in master/slave mode or in standalone mode (sound control, colour change, solid colours). It is controlled by three buttons and an LED display. The power consumption of the CLP56RGB10PS/BS is a mere 20 W.

Product number:	CLP56RGB10PS (polished housing) / CLP56RGB10BS (black housing)
Product type:	LED PAR can
Type:	PAR 56
Colour range:	RGB
Number of LEDs:	108
LED type:	10 mm
Beam angle:	25°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	4/6-channel selectable
DMX functions:	RGB, master dimmer, strobe, sound control, colour jump, colour fade
Standalone modes:	Static colour, colour change, colour fading, sound control, slave
Controls:	Mode, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Aluminium
Housing colour:	Polished / black
Type of cooling:	Convection
Illuminance:	1,220 lx @ 1 m
Dimensions (W x H x L):	230 x 250 x 260 mm (excluding bracket)

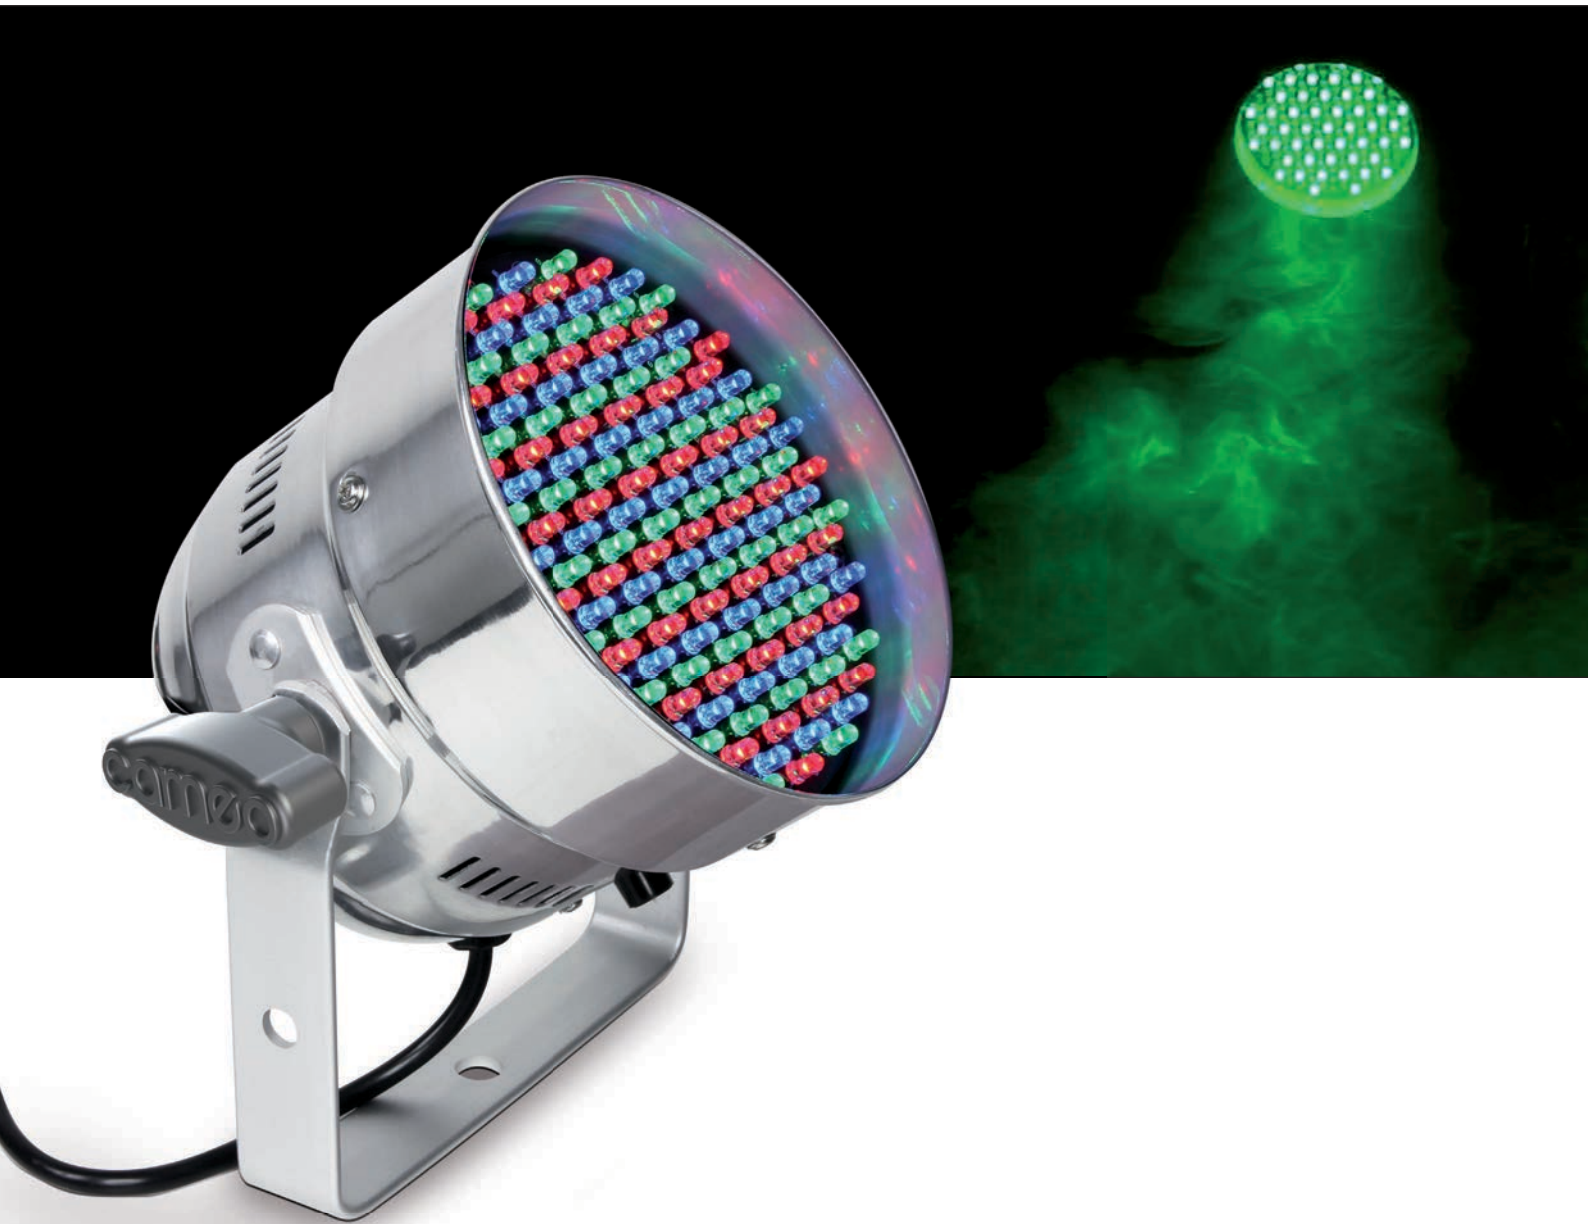

- ▶ 151 powerful RGB LEDs
- ▶ Low power consumption
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the three buttons and LED display
- ▶ Rugged compact aluminum housing



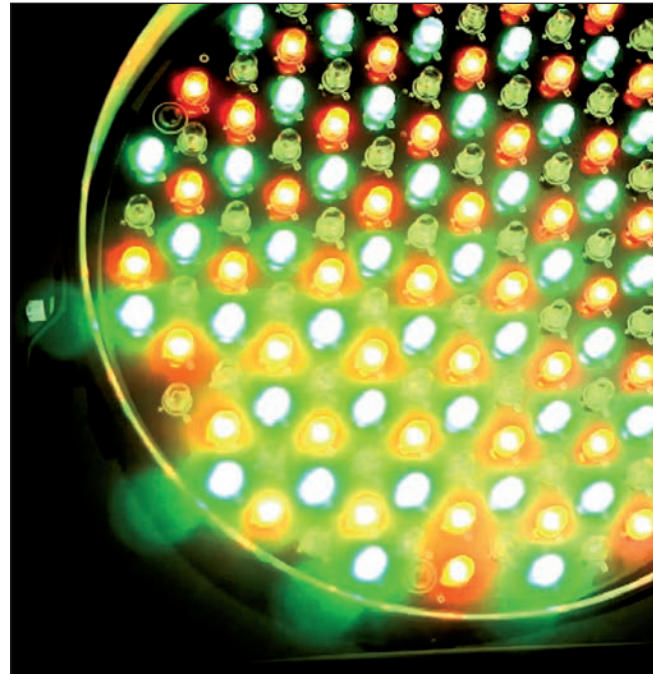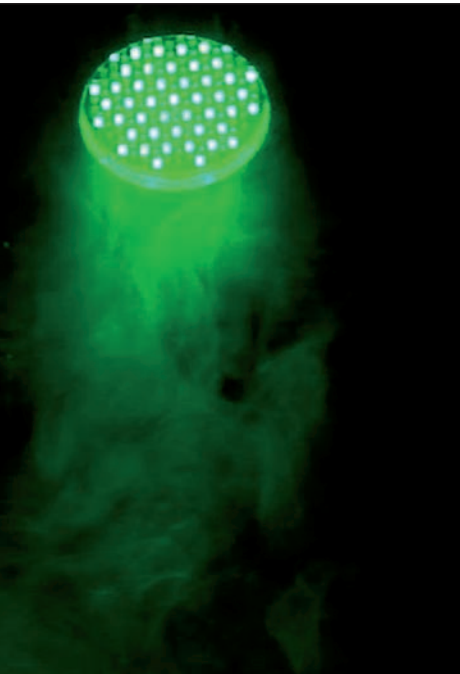

PAR 56 CAN RGB 5 MM

151 X 5 MM LED PAR CAN RGB

IN POLISHED OR BLACK HOUSING


The CLP56RGB05PS/BS is a traditional PAR 56 can that's high-tech on the inside. The 151 ultra-bright LEDs (51 x red, 49 x green, 51 x blue) create an optimal colour mix and awe-inspiring lighting. The CLP56RGB05PS/BS has a beam angle of 25° and at just 23 W, its power consumption is at least ten times lower than that of conventional PAR cans. The CLP56RGB05PS/BS has three operating modes DMX (with four or six control channels), standalone (steady light, colour gradient) or music-controlled (via an integrated microphone). All settings can be configured quickly and easily using the three buttons and the LED on the back.


Product number:	CLP56RGB05PS (polished housing) / CLP56RGB05BS (black housing)
Product type:	LED PAR can
Type:	PAR 56
Colour range:	RGB
Number of LEDs:	151
LED type:	5 mm
Beam angle:	25°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	4 / 6-channel selectable
DMX functions:	RGB, master dimmer, strobe, sound control, colour jump, colour fade
Standalone modes:	Static colour, colour change, colour fading, sound control, slave
Controls:	Mode, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Aluminium
Housing colour:	Polished / black
Type of cooling:	Convection
Illuminance:	900 lx @ 1 m
Dimensions (W x H x L):	170 x 170 x 169 mm (excluding mounting bracket)

NEW!



- ▶ Compact LED spot light with single 15 watt quad LED
- ▶ 2 additional lenses for beam angles of 4.5°, 10° or 25°
- ▶ RDM capable
- ▶ 16-bit technology for high definition colours and ultra smooth dimming
- ▶ Flicker free, ideal for motion picture and TV applications
- ▶ Colour temperature correction
- ▶ 4 high resolution dimming curves with adjustable response
- ▶ 5 modes of DMX control, sound activation plus master, slave and standalone capability
- ▶ Infrared remote control included
- ▶ 4-button OLED display for easy configuration
- ▶ Convection cooling for noise-free performance

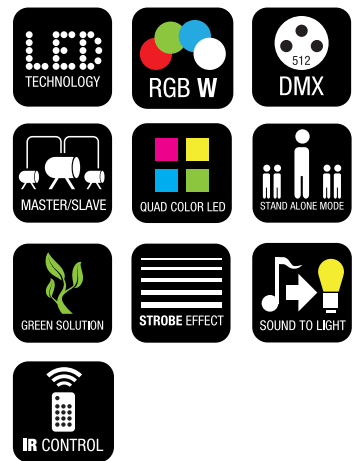

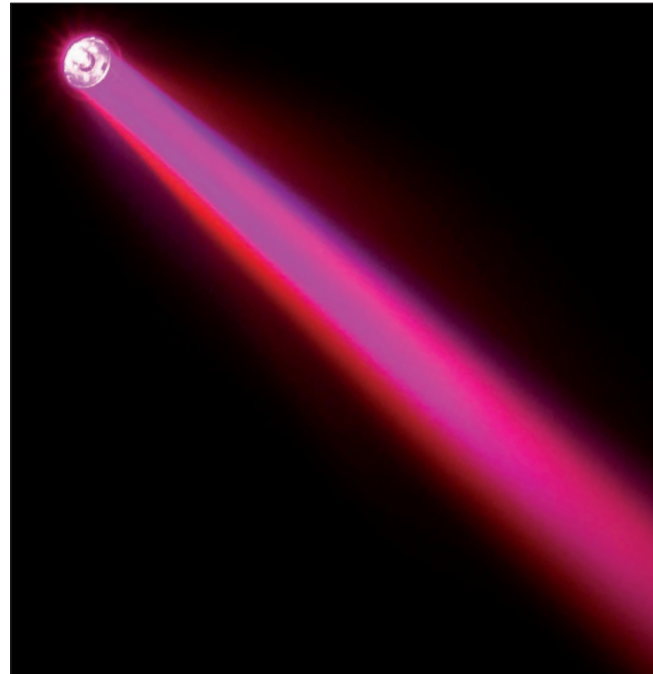

Q-SPOT 15 RGBW COMPACT SPOT LIGHT WITH 15W RGBW LED

Available in black or white finish, the Cameo Q-Spot 15 is a compact, RDM capable light that comes with 2 additional lenses for a choice of 4.5°, 10° and 25° beam angles. It features a powerful 15 watt quad LED for rich RGBW mixes, colour temperature correction and 16-bit technology for high definition colours and ultra smooth dimming. With a 3,600 Hz refresh rate and flicker-free performance the Q-Spot is ideal for motion picture and TV applications while highly efficient convection cooling ensures noise-free operation.

Product number:	CLQS15RGBW (black housing) / CLQS15RGBWWH (white housing)
Product type:	LED PAR Lighting
Type:	Indoor
Colour spectrum:	RGBW
Number of LEDs:	1
LED type:	15 W RGBW
Refresh rate:	3,600 Hz
Dispersion:	10°, 25°, 4.5°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	4-channel, 9-channel, 2-channel, 3-channel 1, 3-channel 2
DMX Functions:	Master dimmer, colour macro, strobe, sound control, RGBW, colour jump
High Speed Strobe:	20 Hz
Standalone modes:	Slave mode, sound control, auto run, colour fade, colour jump, colour macro
Controls:	Down, mode, up, Enter
Indicators:	OLED Display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	18 W
Power connector:	Blue and white power I/O
Housing material:	Metal
Cooling:	Convection
Illuminance:	24,000 lx @ 1 m
Width:	89 mm
Height:	89 mm
Depth:	172 mm
Weight:	1.2 kg

NEW!



- ▶ Compact spot light with single high-power 15 watt warm white LED
- ▶ 3 lenses for beam angles of 4.5°, 10° or 25°
- ▶ RDM capable
- ▶ 16-bit technology for ultra smooth dimming
- ▶ Flicker free, ideal for motion picture and TV applications
- ▶ 4 high resolution dimming curves with adjustable response
- ▶ 3-channel DMX control, sound activation plus master, slave and standalone capability
- ▶ 4-button OLED display for easy configuration
- ▶ Convection cooling for noise-free performance
- ▶ Includes handheld for convenient infrared remote control





Q-SPOT 15 W COMPACT SPOT LIGHT WITH 15W WARM WHITE LED

Compact Spot Light With 15W Warm White LED In Black Or White Housing Available in black or white finish, the Cameo Q-Spot 15 W is a compact, RDM capable PAR can that comes with 3 lenses for a choice of 4.5°, 10° and 25° beam angles. It features a powerful 15 watt warm white LED and 16-bit technology for ultra smooth dimming. With a 3,600 Hz refresh rate and flicker-free performance the Q-Spot is ideal for motion picture and TV applications while highly efficient convection cooling ensures noise-free operation.

Product number:	CLQS15W (black housing) / CLQS15WH (white housing)
Product type:	LED PAR Lighting
Type:	Indoor
Colour spectrum:	Warm white
Number of LEDs:	1
Colour temperature:	3,200 K
LED type:	15 W
Refresh rate:	3,600 Hz
Dispersion:	4.5°, 25°, 10°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	3-channel
DMX Functions:	Master dimmer, sound control, strobe
Standalone modes:	Sound control, master / slave mode
Controls:	Down, Enter, mode, up
Indicators:	OLED Display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	18 W
Power connector:	Blue and white power I / O
Housing material:	Metal
Cabinet colour:	Black
Cooling:	Convection
Illuminance:	5,500 lx @ 1 m
Luminous flux:	435 lm
CRI:	94
Width:	89 mm
Height:	89 mm
Depth:	172 mm
Weight:	1.2 kg



CLPFLATPR018



CLPFLATPR012



CLPFLATPR07

- ▶ High performance thanks to ultra-bright 10 W LEDs
- ▶ Super silent due to convection cooling
- ▶ RGBWA colour spectrum for more flexible colour mixing reaching from warm, rich to solid and pastel colours
- ▶ Flicker-free
- ▶ Professional connectivity with Neutrik powerCON in/out and 3 and 5-pol DMX IN and Outputs
- ▶ Rugged flat and compact metal housing



TECHNOLOGY



RGB WA



DMX



MASTER/SLAVE



SOUND TO LIGHT



STAND ALONE MODE



GREEN SOLUTION



STROBE EFFECT



5 IN 1 LED

LED FLAT PAR CANS




FLAT PRO SERIES INDOOR 10 W LED PAR CAN RGBWA IN BLACK HOUSING

With their RGBWA spectrum, the Cameo FLAT PRO SERIES professional PAR lights support stunning, highly creative lighting design. High performance ultra-bright 10 W LEDs produce a huge range of colours from soft pastel hues to rich, warm tints with a 30° beam angle, while the FLAT PRO lights' 3,000 Hz refresh rate eliminates flicker. Designed for indoor use, the CLPFLATPRO7, CLPFLATPRO12 and CLPFLATPRO18 vary in their dimensions and number of LEDs only. They feature five DMX modes with numerous functions, integrated programmes and a built-in microphone for sound control. Incorporating a backlit LC display with four controls for easy manual operation, the CLPFLATPRO7, CLPFLATPRO12 and CLPFLATPRO18 also provide master, slave and standalone capability. With black die-cast enclosures and convection cooling, the FLAT PRO SERIES PAR lights are super silent. They include both 3-pin and 5-pin XLR inputs and outputs for the DMX signal and Neutrik powerCON sockets for mains supply and daisy-chaining. The multifunctional bracket design offers a wide variety of mounting options.

Product number:	CLPFLATPRO18 / CLPFLATPRO12 / CLPFLATPRO7
Product type:	LED PAR can
Type:	Flat PAR
Colour range:	RGBWA
Number of LEDs:	18 / 12 / 7
LED type:	10 W
Beam angle:	30°
DMX input:	XLR 3-pin, XLR 5-pin
DMX output:	XLR 3-pin, XLR 5-pin
DMX mode:	2-channel, 3-channel-1, 3-channel-2, 5-channel, 8-channel
DMX functions:	Colour jump, colour fade, strobe, master dimmer, RGBWA, sound control
Standalone modes:	Colour jump, colour fade, static colour, sound control, slave mode, colour macro
Controls:	Mode, enter, value up, value down
Indicators:	Backlit LC display
Power connector:	Neutrik powerCON in / out
Housing material:	Metal
Housing colour:	Black
Type of cooling:	Convection
Illuminance:	28,000 lx @ 1 m / 16,000 lx @ 1 m / 12,000 lx @ 1 m
Dimensions (W x H x L):	280 x 280 x 130 mm / 230 x 230 x 135 mm / 180 x 180 x 133 mm (excl. mntg. bracket)



- ▶ 7 ultra-bright 15 W high performance LEDs
- ▶ Highly efficient convection cooling for noiseless operation
- ▶ RGBW for flexible color mixes from rich solid tints to pastel hues
- ▶ 3 temperatures of white from warm to cool white
- ▶ RDM-enabled
- ▶ Colour temperature correction
- ▶ 4 selectable dimming curves
- ▶ Flicker-free
- ▶ Professional connectivity with 3 and 5-pin DMX plus Neutrik powerCON inputs and outputs
- ▶ Rugged, compact metal enclosure with shallow depth

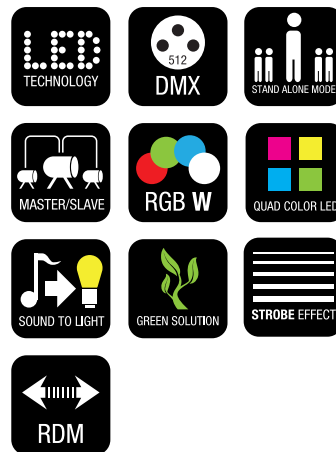

LED FLAT PAR CANS



FLAT PRO 7 SPOT


COMPACT FLAT 7 X 15 WATT QUAD LED PAR SPOT

With only 130 mm depth, the compact Cameo FLAT PRO 7 SPOT is ideal when space is limited. The slim LED PAR can features seven ultra-bright 15 W high performance LEDs for rich, flicker-free RGBW colour mixing with temperature correction, a 3,600 Hz refresh rate and convection cooling for noiseless operation. Beam width is a tightly focused 7°. Sporting six DMX modes as well as standalone, master and slave modes, a built-in microphone for sound activation plus strobe, colour fade and dimmer functions, the thoroughly professional FLAT PRO 7 SPOT is RDM-enabled for bi-directional communication. The black metal enclosure incorporates a backlit 4-button display, both 3-pin and 5-pin DMX inputs and outputs as well as Neutrik powerCON sockets for 100 – 240 V AC mains and easy daisy-chaining. The Cameo FLAT PRO 7 SPOT fixture's multifunctional bracket provides a wide variety of mounting options.

Product number:	CLPFLATPRO7SPOT
Product type:	LED PAR can
Type:	FLAT PAR
Colour spectrum:	RGBW
Number of LEDs:	7
LED type:	15 W
Refresh rate:	3,600 Hz
Dispersion:	7°
DMX input:	XLR 3-pin male, XLR 5-pin male
DMX output:	XLR 3-pin female, XLR 5-pin female
DMX mode:	2-channel, 3-channel 1, 3-channel 2, 4-channel, 9-channel, 10-channel
DMX functions:	RGBW, sound control, strobe, colour jump, colour fade, master dimmer
Standalone modes:	Sound control, colour fade, colour jump, colour macro, slave mode, static colour
Controls:	Value up, value down, mode, enter
Display elements:	Backlit LC display
Power supply:	110 V AC - 240 V AC / 50 – 60 Hz
Power consumption:	90 W
Power connector:	Neutrik powerCON
Housing material:	Metal
Housing colour:	Black
Cooling system:	Convection
Luminous intensity:	48,000 lx @ 1 m
Dimensions (W x H x L):	180 x 180 x 130 mm (excluding mounting bracket)



- ▶ 7 super bright 8 W high performance LEDs
- ▶ Highly efficient convection cooling for noiseless operation
- ▶ RGBW for flexible color mixes from rich solid tints to pastel hues
- ▶ 3 temperatures of white from warm to cool white
- ▶ RDM-enabled
- ▶ Colour temperature correction
- ▶ 4 selectable dimming curves
- ▶ Flicker-free
- ▶ Professional connectivity with 3 and 5-pin DMX plus Neutrik powerCON inputs and outputs
- ▶ Rugged, compact metal enclosure with shallow depth

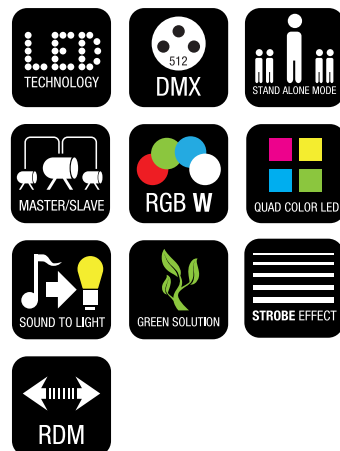

LED FLAT PAR CANS



FLAT PRO 7 XS COMPACT FLAT 7 X 8 WATT QUAD LED PAR LIGHT

With only 130 mm depth, the compact Cameo FLAT PRO 7 XS is ideal when space is limited. The slim LED PAR can features seven super bright 8 W high performance LEDs for rich, flicker-free RGBW colour mixing with temperature correction, a 3,600 Hz refresh rate and convection cooling for noiseless operation. Beam width is 20°. Sporting six DMX modes as well as standalone, master and slave modes, a built-in microphone for sound activation plus strobe, colour fade and dimmer functions, the thoroughly professional FLAT PRO 7 XS is RDM-enabled for bi-directional communication. The black metal enclosure incorporates a backlit 4-button display, both 3-pin and 5-pin DMX inputs and outputs as well as Neutrik powerCON sockets for 100 – 240 V AC mains and easy daisy-chaining. The Cameo FLAT PRO 7 XS fixture's multifunctional bracket provides a wide variety of mounting options.

Product number:	CLPFLATPRO7XS
Product type:	LED Par Can
Type:	FLAT PAR
Colour spectrum:	RGBW
Number of LEDs:	7
LED type:	8 W
Refresh rate:	3,600 Hz
Dispersion:	20°
DMX input:	XLR 3-pin male, XLR 5-pin male
DMX output:	XLR 3-pin female, XLR 5-pin female
DMX mode:	2-channel, 3-channel 1, 3-channel 2, 4-channel, 9-channel, 10-channel
DMX functions:	RGBW, sound control, strobe, colour jump, colour fade, master dimmer
Standalone modes:	Sound control, colour fade, colour jump, colour macro, slave mode, static colour
Operating controls:	Value up, value down, mode, enter
Display elements:	Backlit LC display
Power supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	75 W
Power connector:	Neutrik powerCON
Housing material:	Metal
Housing colour:	Black
Cooling system:	Convection
Illuminance:	17,000 lx @ 1 m
Dimensions (W x H x L):	180 x 180 x 130 mm (excluding mounting bracket)





- ▶ High-power 7 x 4 W quad-colour LED Flat Par Can
- ▶ Superb RGBW color mixing
- ▶ Lens optimized for uniform light intensity
- ▶ Infrared remote control option
- ▶ Low power consumption
- ▶ 6 DMX modes, master, slave and standalone operation plus IR remote option
- ▶ DMX and IEC power in and out for daisy chaining up to 10 units
- ▶ Built-in microphone for sound activation
- ▶ 4-button LED display for intuitive configuration
- ▶ Flat, compact ABS housing
- ▶ Twin brackets included



NEW!

**Optional
IR remote control
CLPFLAT1REMOTE**

LED FLAT PAR CANS

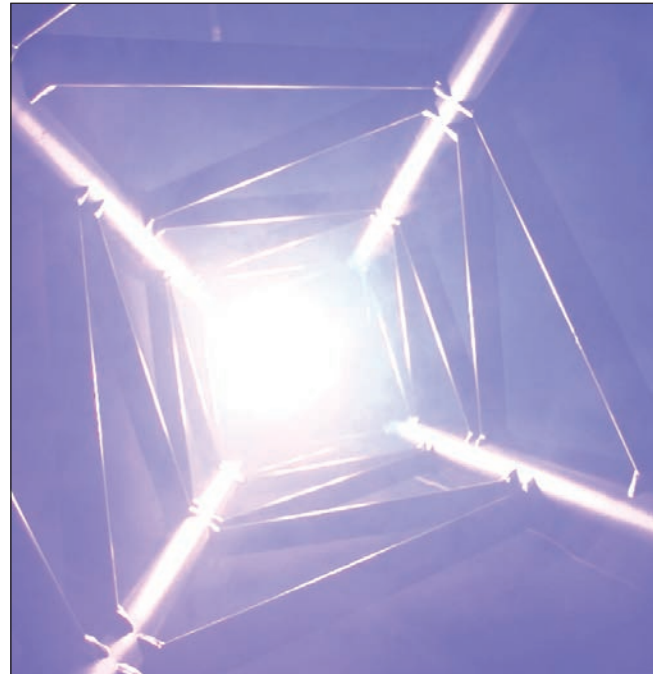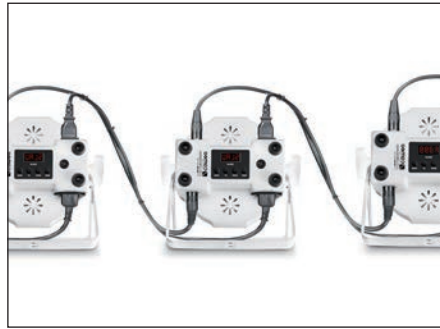

FLAT PAR CAN TRI 3W IR

7 X 4 W HIGH-POWER FLAT RGBW LED PAR LIGHT WITH IR REMOTE CONTROL OPTION

The Cameo Flat 1 RGBW is a luminous shallow-depth PAR light with seven 4 watt high-power RGBW LEDs, master dimmer and strobe functions and a 30° beam angle. High-efficiency convection cooling provides noise-free operation. The Flat 1 RGBW features 6 modes of DMX control, sound activation and master, slave and standalone capability. A 4-button display enables easy configuration, a handheld is available as accessory for convenient infrared remote control. The compact ABS housing sports 3-pin DMX and IEC power inputs and outputs for daisy-chaining up to 10 units and adjustable twin brackets.


Product number:	CLPFLAT1RGBWIR (black housing) / CLPFLAT1RGBWIRWH (white housing)
Product type:	LED PAR Lighting
Type:	Indoor
Colour spectrum:	RGBW
Number of LEDs:	7
LED type:	4 W
Dispersion:	30°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	3-channel 2, 3-channel 1, 3-channel 3, 4-channel, 2-channel, 8-channel
DMX Functions:	Colour jump, colour macro, master dimmer, strobe, sound control, RGBW, colour fade
Standalone modes:	Sound control, slave mode, static colour, colour macro, colour jump, strobe, colour fade
Controls:	Enter, mode, Value Down, Value Up
Indicators:	LED Display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	35 W
Power connector:	IEC power input and output
Housing material:	ABS plastic
Cabinet colour:	Black
Cooling:	Convection
Illuminance:	8,400 lx @ 1 m
Dimensions without mounting bracket	
Width:	180 mm
Height:	175 mm
Length:	115 mm
Weight:	1.2 kg



NEW!

**Optional
IR remote control
CLPFLAT1REMOTE**

- ▶ With IR remote control capability
- ▶ Low power consumption
- ▶ Power in / out for daisy chaining up to 10 units
- ▶ Operated via DMX, in master/slave mode or standalone mode or optional IR-remote
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Flat and compact ABS housing

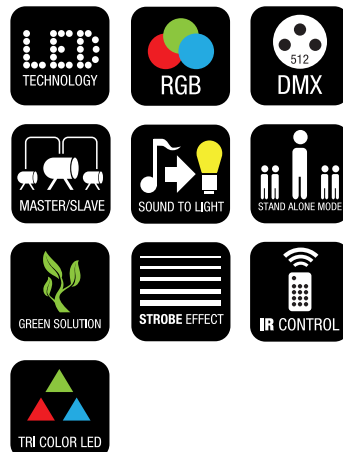

LED FLAT PAR CANS




NEW!



Also available: **CLPFLAT1TRI3WIRSET1 / CLPFLAT1TRI3WIRWHSET1**
Set including 4 units
+ 1 remote control



Also available in white.

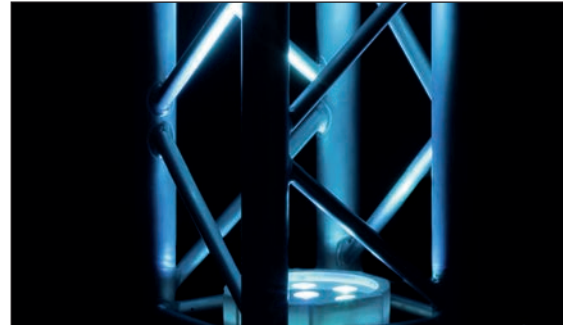

FLAT PAR CAN TRI 3W IR

7 X 3W TRI-COLOUR LED PAR CAN RGB IN BLACK OR WHITE HOUSING

The Cameo CLPFLAT1TRI3WIR is a very flat, luminous PAR projector with seven 3 W high-power tri-LEDs, RGB colour spectrum, a 30° beam angle, rich features and lighting effects. It works completely silently. Thanks to minimal heat generation, no fan is required.

The CLPFLAT1TRI3WIR can be operated via an infrared remote control, four DMX modes, the integrated display with control buttons for menu, enter, up and down or external sound sources and as a master, slave and standalone.

Product number:	CLPFLAT1TRI3WIR (black housing) / CLPFLAT1TRI3WIRWH (white housing)
Product type:	LED PAR can
Type:	FLAT PAR
Colour range:	RGB
Number of LEDs:	7
LED type:	3W tri-colour
Dispersion:	30°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	3-channel 2, 3-channel 1, 2-channel, 6-channel
DMX functions:	Strobe, colour jump, sound control, RGB, colour fade, master dimmer
Standalone modes:	Slave mode, sound control, static colour, colour fade, colour jump, colour macro
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Power supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	25 W
Power connector:	IEC power connector male, IEC power connector female
Housing material:	ABS plastic
Housing colour:	Black, white
Illuminance:	4,100 lx @ 1 m
Dimensions (W x H x L):	180 x 175 x 115 mm (excluding mounting bracket)


NEW!



NEW!

**Optional
IR remote control
CLPFLAT1REMOTE**

- ▶ With IR remote control option
- ▶ Low power consumption
- ▶ Current input and output connectors for daisy-chaining up to 10 devices
- ▶ Operation by DMX, master/slave mode, as a single projector or via the optional IR remote control
- ▶ Built-in microphone for sound-control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double mounting bracket included in the delivery
- ▶ Flat, compact ABS housing

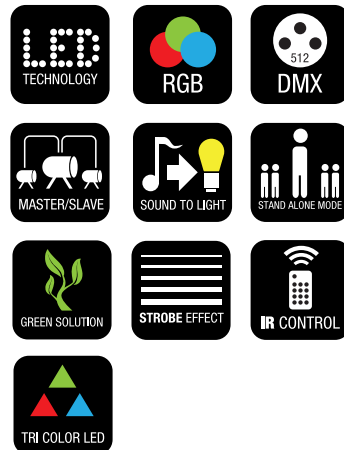

LED FLAT PAR CANS



NEW!



Also available:

CLPFLAT1TRI5X3WSET1

Set including 4 units
+ 1 remote control



FLAT PAR CAN TRI 5 X 3W IR FLAT PAR PROJECTOR WITH 5 X 3W HIGH-POWER TRI-COLOUR RGB LEDS IN BLACK HOUSING

The Cameo CLPFLAT1TRI5X3WIR is a flat PAR projector with five brilliant 3 W tri-colour LEDs for RGB colour mixing, with a 30° beam angle and an intensity of 3,850 lux. RGB colour spectrum. Due to its minimal heat emission, it doesn't need a fan and works absolutely noiselessly. The CLPFLAT1TRI5X3WIR can be flexibly controlled via an optional infrared remote control, four DMX modes and a bright display with buttons for menu, enter, up and down. It can be operated as a master, slave and standalone with multiple functions and is equipped with a microphone for music control. The compact black plastic ABS housing has XLR connectors for input and forwarding of the DMX signal; IEC connectors are used to connect to mains and output. Thus, a maximum of 10 projectors can be connected in series; an adjustable double bracket offers variable mounting options. The Cameo CLPFLAT1TRI5X3WIR is also attractive due to its low power consumption of only 20 W.

Product number:	CLPFLAT1TRI5X3WIR
Product type:	LED PAR can
Type:	Flat PAR
Colour range:	RGB
Number of LEDs:	5
LED type:	3 W tri-colour
Dispersion:	30°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	6-channel, 3-channel 2, 3-channel 1, 2-channel
DMX functions:	Sound control, RGB, colour jump, master dimmer, colour fade, strobe
Standalone modes:	Static colour, sound control, slave mode, colour jump, colour fade
Controls:	Mode, value down, value up, enter
Display:	LED display
Operating voltage:	110 V AC - 240 V AC / 50 - 60 Hz
Power consumption:	20 W
Power connector:	IEC power connector male, IEC power connector female
Housing material:	ABS plastic
Housing colour:	Black
Type of cooling:	Convection
Illuminance:	3,850 lx @ 1 m
Dimensions (W x H x L):	180 x 175 x 115 mm (excluding mounting bracket)



NEW!

**Optional
IR remote control
CLPFLAT1REMOTE**

- ▶ Extremely bright spotlight in a flat and lightweight ABS housing
- ▶ Optional IR remote available (CLPFLAT1REMOTE)
- ▶ Very low power consumption
- ▶ Power in / out for daisy chaining up to 10 units


LED FLAT PAR CANS

NEW!



Also available:
Set including 4 units
+ 1 remote control

**CLPFLAT1RGB10IRSET1 /
CLPFLAT1RGB10IRWHSET1**

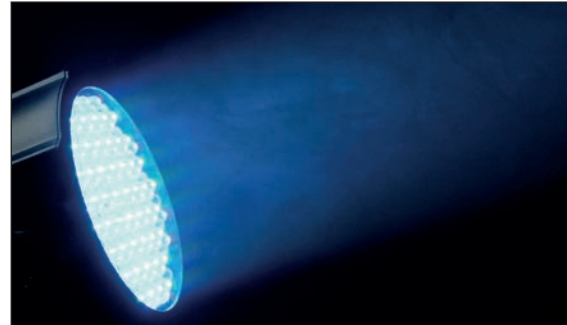

FLAT PAR CAN RGB

144 X 10 MM FLAT LED RGB PAR SPOT LIGHT IN BLACK OR WHITE HOUSING

The Cameo CLPFLAT1RGB10IR is a flat and lightweight PAR light with RGB colours and 14° beam angle providing a variety of functions and lighting effects. A total of 144 large extremely powerful 10 mm LEDs provide rich and radiant colour mixing while convection cooling allows for noise-free operation. The compact black ABS enclosure of the CLPFLAT1RGB10IR incorporates adjustable twin brackets, DMX input and output on XLR connectors and IEC power connectors for daisy chaining up to 10 units. The Cameo CLPFLAT1RGB10IR features IR remote control capability, 4 DMX modes, sound control and a display with mode, enter, up and down keys. It can be used as master, slave and standalone, and at 15 W only, the unit's power consumption is extremely low. An IR remote control is available as accessory (CLPFLAT1REMOTE).

Product number:	CLPFLAT1RGB10IR (black housing) / CLPFLAT1RGB10IRWH (white housing)
Product type:	LED PAR can
Type:	Flat PAR
Colour range:	RGB
Number of LEDs:	144 (48 x red, 48 x green, 48 x blue)
LED type:	10 mm
Beam angle:	14°
DMX input:	XLR 3-pin
DMX output:	XLR 3-pin
DMX mode:	2-channel, 3-channel 1, 3-channel 2, 6-channel
DMX functions:	Colour fade, colour jump, master dimmer, RGB, sound, control, strobe
Standalone modes:	Colour jump, colour fade, slave mode, sound, control, static colour, colour macro
Controls:	Mode, value down, value up, enter
Indicators:	LED display
Power connector:	IEC connector male/female
Housing material:	ABS
Housing colour:	Black, white
Type of cooling:	Convection
Illuminance:	4,000 lx @ 1 m
Dimensions (W x H x L):	180 x 175 x 115 mm (excluding mounting bracket)


NEW!



- ▶ Infrared remote control capability
- ▶ Low power consumption
- ▶ DMX and IEC power in and out for daisy chaining up to 10 units
- ▶ 3 DMX modes, master, slave and standalone operation plus IR remote option
- ▶ 4-button LED display for intuitive configuration
- ▶ Twin brackets included as standard
- ▶ Flat, compact ABS housing



LED FLAT PAR CANS

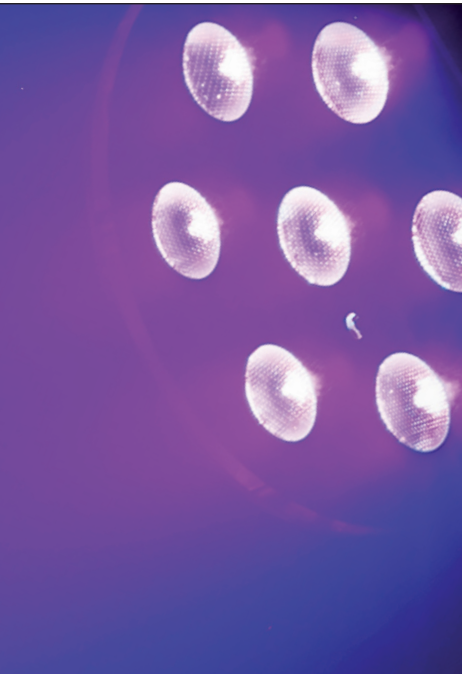

FLAT PAR CAN 7X3W UV IR 7 X 3 W HIGH POWER FLAT LED UV PAR LIGHT

The Cameo CLPFLAT1UVIR is a very flat, luminous PAR projector with seven 3 watt high power UV LEDs, dimmer and strobe functions and a 40° beam angle. High-efficiency convection cooling provides noise-free operation. The CLPFLAT1UVIR features 3 modes of DMX control, master, slave and standalone capability. A 4-button display enables easy configuration, an infrared remote control is available as an optional accessory. The compact ABS housing sports 3-pin DMX and IEC power inputs and outputs for daisy-chaining up to 10 units and adjustable twin brackets.


Product number:	CLPFLAT1UVIR (black housing) / CLPFLAT1UVIRWH (white housing)
Product type:	LED PAR Lighting
Type:	Indoor
Colour spectrum:	UV
Number of LEDs:	7
LED type:	3 W
Dispersion:	40°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	1-channel, 3-channel, 2-channel
DMX Functions:	Strobe, master dimmer
Standalone modes:	Slave mode, static colour, strobe
Controls:	Mode, Enter, Value Up, Value Down
Indicators:	LED Display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	20 W
Power connector:	IEC power connector female, IEC power connector male
Housing material:	ABS plastic
Cooling:	Convection
Dimensions without mounting bracket	
Width:	180 mm
Height:	175 mm
Length:	115 mm
Weight:	1.2 kg

NEW!



- ▶ 12 x 12 W ultra high-power RGBWA+UV LEDs
- ▶ Highest flexibility for perfect mixing of solid, pastel colours to warm rich colours and ultra violet
- ▶ Flicker-free with a refresh rate of 3,000 Hz
- ▶ Operation via DMX, in master / slave mode or as a single projector
- ▶ 5 DMX modes for flexible operation
- ▶ Built-in microphone for sound-control mode
- ▶ Simple to operate using the four buttons and LC-display
- ▶ Original Neutrik powerCON In- and Outputs
- ▶ Sturdy metal housing with double brackets



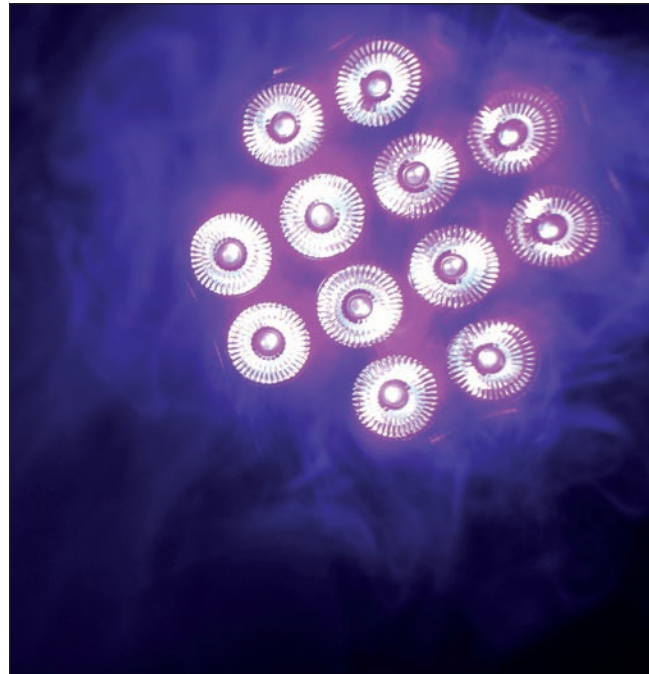

STUDIO PAR 64 CAN RGBWA+UV 12 X 12 W QUAD COLOUR LED PAR LIGHT RGBWA+UV

The Cameo CLPST64RGBWU12W is a professional PAR 64 projector with a 25° dispersion angle in a sturdy black housing made of cast metal with 12 bright 12 W 6-in-1 LEDs. The RGBWA+UV system allows for a creative lighting design with subtle pastel colours as well as brilliant, saturated colours. The refresh rate of 3,000 Hz provides for flicker-free operation.

Product number:	CLPST64RGBWU12W (black housing) / CLPST64RGBWU12WWH (white housing)
Product type:	LED PAR Lighting
Type:	Indoor
Colour spectrum:	RGBWA+UV
Number of LEDs:	12
LED type:	12 W 6in1 colour
Refresh rate:	3,000 Hz
Dispersion:	25°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	9-channel, 6-channel, 3-channel 2, 3-channel 1, 2-channel
DMX Functions:	Sound control, colour fade, colour jump, RGBWA+UV, strobe
Standalone modes:	Slave mode, colour macro, strobe, colour jump, static colour, colour fade, sound control
Controls:	Up, mode, Enter, down
Indicators:	Backlit LCD
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	110 W
Power connector:	Neutrik powerCon
Housing material:	Metal
Cooling:	Fan
Fuse:	F2 AL / 250 V
Dimensions without mounting bracket	
Width:	230 mm
Height:	220 mm
Length:	255 mm
Weight:	4.9 kg
Other features:	Double bracket included, 1m power cable with Neutrik powerCon and safety plug included



- ▶ 18 x 8 W ultra high-power quad RGBW LEDs
- ▶ RGBW for perfect mixing of solid and pastel colours
- ▶ Operated via DMX, in master / slave mode or standalone mode
- ▶ Integrated microphone for sound control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Sturdy metal housing





STUDIO PAR 64 CAN Q 8W


18 X 8 W QUAD COLOUR LED PAR CAN RGBW IN BLACK HOUSING


Extremely high-powered LED studio PAR in a black short housing. Ruggedly made housing in studio look with built-in filter frame holder. The Cameo CLPST64Q8W has a total of 18 quad LEDs (RGBW), thus guaranteeing perfect mixing of solid and pastel colours – including white. With a power consumption of just 170 W, the 8 W quad LEDs produce an impressive level of brightness with a beam angle of 25°. It is operated using four buttons and an LED display on the back. The CLPST64Q8W is equipped with a super-quiet fan for cooling. There are three operating modes. In addition to DMX operation with 2, 3, 4 or 7-channels, this LED PAR can also be operated in standalone mode or via sound control. The CLPST64Q8W runs on mains voltages of 110 to 240 V, so it can be used universally and worldwide.

Product number:	CLPST64Q8W
Product type:	LED PAR can
Type:	Studio PAR 64
Colour range:	RGBW
Number of LEDs:	18
LED type:	8W quad colour
Beam angle:	25°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	2/3/4/7-channel selectable
DMX functions:	RGBW, master dimmer, strobe, sound control, colour jump, colour fade
Standalone modes:	Static colour, colour fading, colour jump, sound control, slave
Controls:	Enter, mode, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Metal
Housing colour:	Black
Type of cooling:	Fan
Illuminance:	14,500 lx @ 1 m
Dimensions (W x H x L):	230 x 220 x 255 mm (excluding mounting bracket)



- ▶ 18 x 8 W ultra high-power quad RGBA LEDs
- ▶ RGBA for warmer richer colours
- ▶ Operation via DMX, in master / slave mode or as a single projector
- ▶ Built-in microphone for sound-control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double bracket included
- ▶ Sturdy metal housing

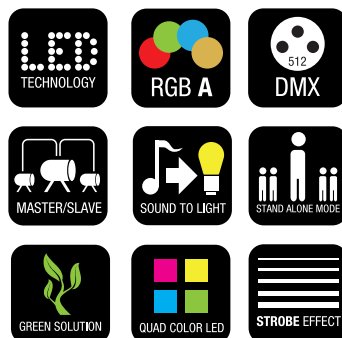

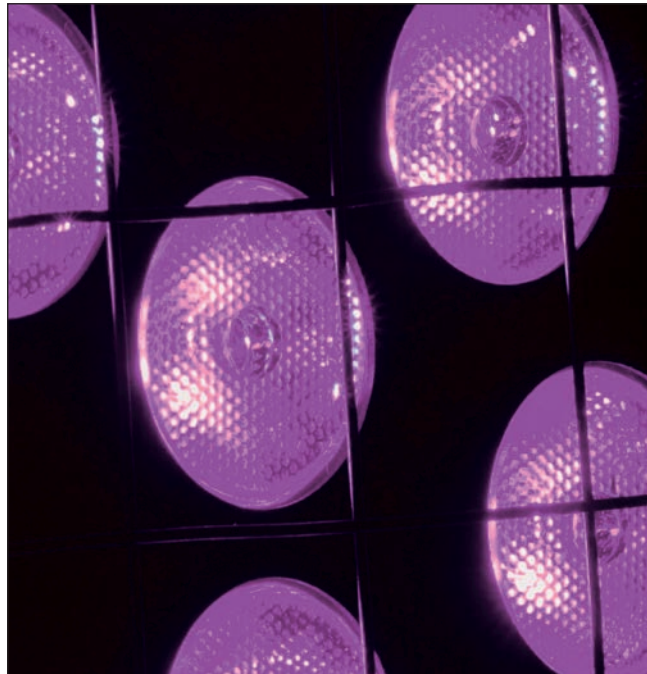

STUDIO PAR 64 CAN RGBA Q 8W 18 X 8W QUAD COLOUR LED PAR CAN RGBA IN BLACK HOUSING

The Cameo CLPST64RGBAQ8W is a professional Studio PAR 64 projector with a 25° dispersion angle in a classic black metal housing. 18 energy efficient high-performance 8 W quad LEDs in the RGBA-system (RGB additive Colour System plus amber LEDs) for a natural colour mix with a high light output, the extremely high refresh rate of 5,000 Hz for flicker-free operation and therefore also ideal for TV-production.

Product number:	CLPST64RGBAQ8W
Product type:	LED PAR can
Type:	Studio PAR 64
Colour range:	RGBA
Number of LEDs:	18
LED type:	8W quad colour
Beam angle:	25°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	2-channel, 3-channel 1, 3-channel 2, 4-channel, 7-channel
DMX functions:	Sound control, strobe, colour fade, colour jump, master dimmer, RGBA
Standalone modes:	Colour macro, colour jump, colour fade, slave mode, sound control, static colour
Controls:	Value down, enter, mode, value up
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Metal
Housing colour:	Black
Type of cooling:	Fan
Illuminance:	12,000 lx @ 1 m (+/- 10%)
Dimensions (W x H x L):	230 x 220 x 255 mm (excluding mounting bracket)



- ▶ 18 x 3 W high-power tri-RGB LEDs
- ▶ Low-power consumption
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Sturdy metal housing





STUDIO PAR 64 CAN TRI 3W

18 X 3W TRI-COLOUR LED PAR CAN RGB

IN BLACK HOUSING


Professional Studio PAR with 18 ultra-bright 3 W tri-LEDs in a sturdy, black aluminium housing with a beam angle of 25°. It is actuated either via the DMX protocol (3-pin XLR) with six control channels, in master/slave mode or standalone mode (sound control, colour change, solid colours). The CLPST64TRI3W is operated via four push buttons and an LED display. Its power consumption is a mere 60 W.

Product number:	CLPST64TRI3W
Product type:	LED PAR can
Type:	Studio PAR 64
Colour range:	RGB
Number of LEDs:	18
LED type:	3W tri-colour
Beam angle:	25°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	6-channel
DMX functions:	RGB, master dimmer, strobe, sound control, colour jump, colour fade
Standalone modes:	Static colour, colour change, colour fading, sound control, slave
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Metal
Housing colour:	Black
Type of cooling:	Fan
Illuminance:	7,650 lx @ 1 m
Dimensions (W x H x L):	230 x 220 x 260 mm (excluding mounting bracket)



- ▶ 7 x 8 W ultra high-power quad RGBW LEDs
- ▶ RGBW for perfect mixing of solid and pastel colours
- ▶ Operated via DMX, in master / slave mode or standalone mode
- ▶ Integrated microphone for sound control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Compact, sturdy metal housing



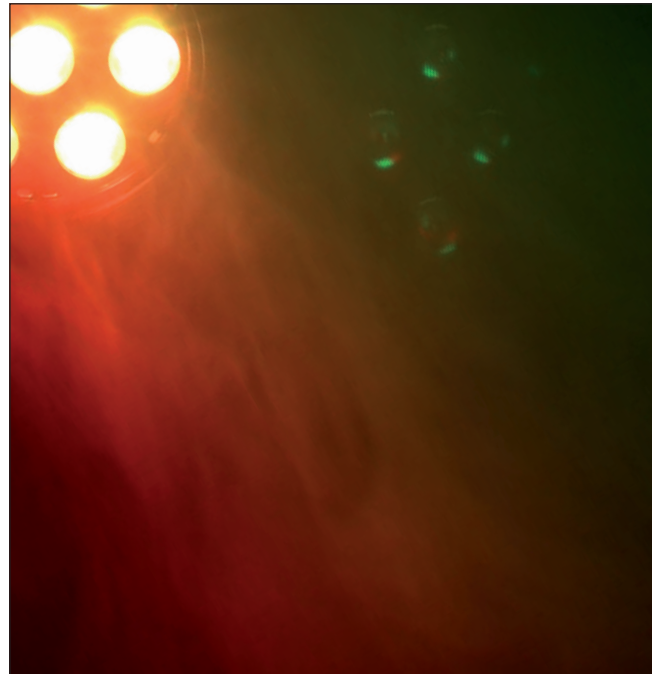

STUDIO MINI PAR CAN Q 8W

7 X 8 W QUAD COLOUR LED PAR CAN RGBW

IN BLACK OR WHITE HOUSING

Extremely powerful studio mini PAR with seven 8 W quad colour LEDs for optimal colour mixing and perfect white light. This studio LED PAR has a beam angle of 25° and is controlled via five DMX modes. An LED display on the back and four buttons ensure simple and practical operation. Alternatively, the studio mini PAR can also be operated in standalone mode with a built-in microphone and sound control. Sturdy black or white housing with double bracket for use as a floor PAR or on stands or traverses. Maximum power consumption 60 W.

Product number:	CLPSTMINIQ8W (black housing) / CLPSTMINIQ8WWH (white housing)
Product type:	LED PAR can
Type:	Studio mini PAR
Colour range:	RGBW
Number of LEDs:	7
LED type:	8W quad colour
Refresh rate:	5,000 Hz
Beam angle:	25°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	2-channel, 3-channel 1, 3-channel 2, 4-channel, 7-channel
DMX functions:	RGBW, master dimmer, strobe, colour jump, colour fade
Standalone modes:	Static colour, colour change, colour fading, sound control, slave
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Aluminium
Housing colour:	Black / white
Type of cooling:	Fan
Illuminance:	6,640 lx @ 1 m
Dimensions (W x H x L):	168 x 183 x 186 mm (excluding mounting bracket)



- ▶ Powerful and innovative 30W RGB COB LED
- ▶ For rich, natural colours and illumination uniformity
- ▶ Wide beam angle
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Compact, sturdy metal housing






STUDIO MINI PAR CAN COB 30W 30 W COB LED PAR CAN RGB IN BLACK OR WHITE HOUSING

The Cameo CLPSTMINICOB30W is a compact studio PAR light using the RGB additive system. With innovative chip-on-board technology and powered by a single 30W COB LED, the miniature fixture creates rich, natural colours and pastel hues alike with uniform coverage and a 55° beam angle. The CLPSTMINICOB30W provides DMX control in 2-channel, 3-channel 1, 3-channel 2 and 6-channel modes and a variety of functions including strobe effects. It is capable of master, slave and standalone operation and features a built-in microphone for sound activation. Mode, enter, value up and down keys and the clear LED display allow for easy menu access. The CLPSTMINICOB30W is available in black and white with easily adjustable twin brackets providing truss, floor and other mounting options.

Product number:	CLPSTMINICOB30W (black housing) / CLPSTMINICOB30WWH (white housing)
Product type:	LED PAR can
Type:	Studio mini PAR
Colour range:	RGB
Number of LEDs:	1
LED type:	30 W COB
Beam angle:	55°
DMX input:	XLR 3-pin
DMX output:	XLR 3-pin
DMX mode:	2-channel, 3-channel 1, 3-channel 2, 6-channel
DMX functions:	RGB, master dimmer, strobe, colour jump, colour fade
Standalone modes:	Static colour, colour change, colour fading, sound control, slave
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Metal
Housing colour:	Black / white
Type of cooling:	Fan
Dimensions (W x H x L):	168 x 183 x 186 mm (excluding mounting bracket)



IR-Remote included

- ▶ 7 x 4 W high-power cold white / warm white LEDs
- ▶ 17 presets for different colour temperatures
- ▶ IR remote included
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Compact, sturdy metal housing



LED STUDIO PAR CANS



STUDIO MINI PAR CAN Q 4W W 7 X 4W COLD WHITE / WARM WHITE LED PAR CAN IN BLACK OR WHITE HOUSING


The Cameo CLPSTMINIQ4WW is a compact all-white studio PAR light. Featuring seven powerful 4 W 2-in-1 LEDs, the miniature fixture creates varying degrees of colour temperature and brightness from warm to cold white with a focused 35° coverage. The CLPSTMINIQ4WW allows for 2, 5 and 6-channel DMX modes and master, slave and standalone operation with a variety of functions, 17 temperature presets and infrared remote control capability. Mode, enter, value up and down keys and the clear LED display provide easy menu access. Available in black and white, the CLPSTMINIQ4WW incorporates adjustable twin brackets for truss, floor and other mounting options.

Product number:	CLPSTMINIQ4WW (black housing) / CLPSTMINIQ4WWWH (white housing)
Product type:	LED PAR can
Type:	Studio mini PAR
Colour range:	Cold white / warm white
Number of LEDs:	7
LED type:	4 W 2-in-1 LED
Beam angle:	35°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	2-channel, 5-channel, 6-channel
DMX functions:	Master dimmer, cool white, warm white, strobe, colour temperature
Standalone modes:	Slave, static colour mode, colour temperature (17 presets)
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Metal
Housing colour:	Black / white
Type of cooling:	Fan
Illuminance:	5,000 lx @ 1 m
Colour temperature:	3,200 K - 6,500 K
Remote:	IR remote
Dimensions (W x H x L):	168 x 186 x 186 mm (excluding mounting bracket)



- ▶ 7 x 3 W high-power tri-RGB LEDs
- ▶ Low power consumption
- ▶ Operated via DMX, in master / slave mode or standalone mode
- ▶ Integrated microphone for sound control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Compact, sturdy metal housing



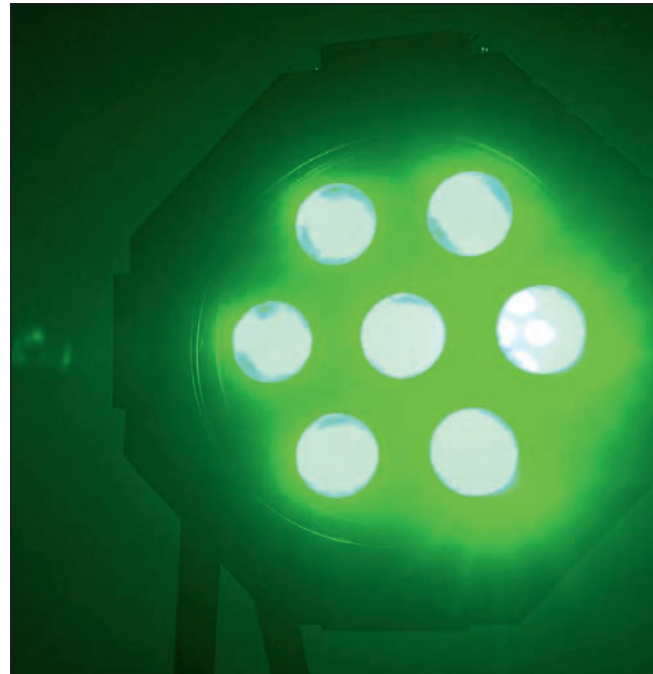

STUDIO MINI PAR CAN TRI 3W 7 X 3 W TRI-COLOUR LED PAR CAN RGB IN BLACK OR WHITE HOUSING

Professional Mini PAR in sturdy and compact black or white housing. The light is provided by seven ultra-bright 3 W tri-colour LEDs, and the beam angle is 25°. Thanks to the colour mix in the LED itself, colours are added without coloured shadows or borders. The power consumption of the CLP-STMINITRI3W/WH is a mere 30 W. The sturdy, compact housing features a double bracket for mounting to cross-beams and bars and for use as a floor PAR. It is actuated via DMX (6 channel) or in standalone mode. The CLPSTMINITRI3W/WH has an integrated microphone for sound control.

Product number:	CLPSTMINITRI3W (black housing) / CLPSTMINITRI3WWH (white housing)
Product type:	LED PAR can
Type:	Studio mini PAR
Colour range:	RGB
Number of LEDs:	7
LED type:	3W tri-colour
Beam angle:	25°
DMX input:	XLR 3-pin
DMX output:	XLR 3-pin
DMX mode:	6-channel
DMX functions:	RGB, master dimmer, strobe, colour jump, colour fade
Standalone modes:	Static colour, colour change, colour fading, sound control, slave
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Metal
Housing colour:	Black / white
Type of cooling:	Convection
Illuminance:	4,070 lx @ 1 m
Dimensions (W x H x L):	168 x 183 x 186 mm (excluding mounting bracket)



STUDIO PAR **BARN DOOR 1**

BARN DOORS FOR STUDIO MINI PAR IN BLACK OR WHITE


Barn doors for studio mini PAR with
4 adjustable leaves

suitable for
CLPSTMINICOB30W/WH
CLPSTMINIQ4WW/WH
CLPSTMINIQ8W/WH
CLPSTMINITRI3W/WH
CLPSTMINICOB30W/WH



NEW!

Product number:	CLPSTBARND00R1B (black housing) / CLPSTBARND00R1WH (white housing)
Product type:	Barn doors
Material:	Metal
Colour:	Black / white

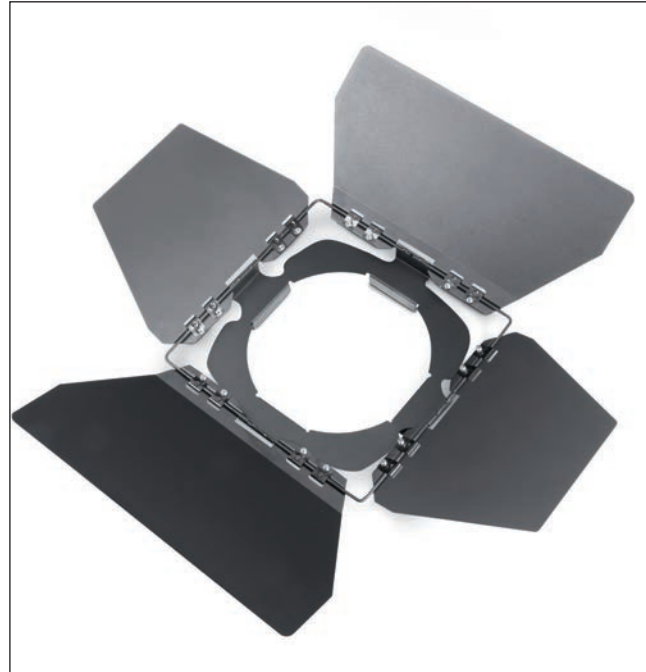


STUDIO PAR **BARN DOOR 2**

BARN DOORS FOR STUDIO PAR
IN BLACK

Barn doors for Studio PAR with
4 adjustable leaves

suitable for
CLPST64Q8W
CLPST64RGBQ8W
CLPST64TRI3W

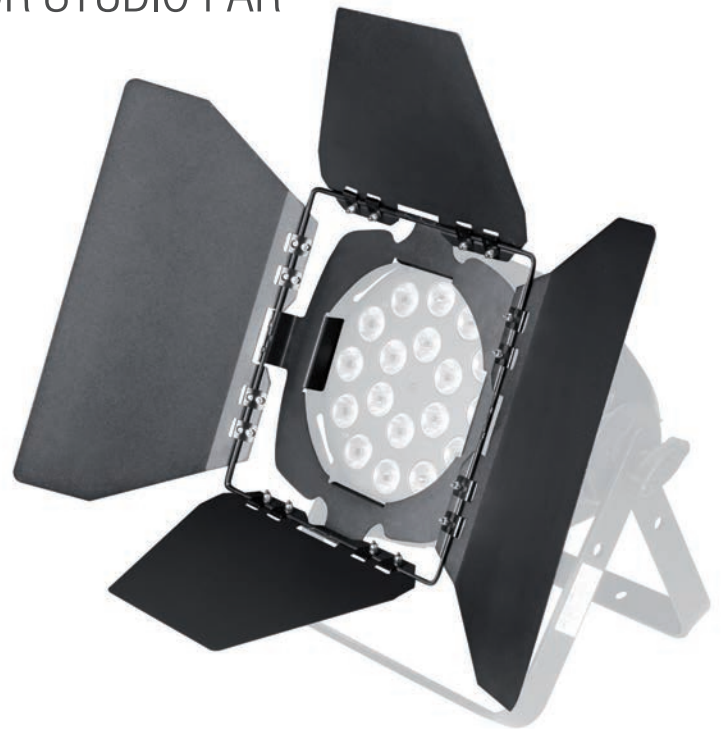

Product number:	CLPSTBARND00R2B
Product type:	Barn doors
Material:	Metal
Colour:	Black

NEW!



- ▶ Professional high output PAR with 7° – 55° zoom
- ▶ RDM enabled
- ▶ 120 W RGBW COB LED
- ▶ 16-bit technology for uniform HD colours & perfect dimming behavior
- ▶ Colour temperature correction
- ▶ 4 selectable HD dimming curves with adjustable response
- ▶ Variable white balance
- ▶ Flicker free, ideal for TV and film applications
- ▶ IP65 rating for outdoor use
- ▶ 7 modes of DMX control plus master, slave and standalone operation
- ▶ Neutrik powerCON TRUE1 and 5-pin X-HD connectors





ZENIT Z 120

PROFESSIONAL ZOOM PAR LIGHT WITH IP65

The Cameo ZENIT® Z 120 is an RDM enabled high output zoom PAR can for demanding professional applications. It employs a single long-life 120 watt RGBW COB LED and 16-bit technology for vivid high-definition colour mixes with maximum uniformity and perfect dimming behaviour. Covering a range from 7° to 55°, the motorized zoom provides flexible illumination from tightly focused, narrow beams to wide, diffuse washes. With a 3.600 Hz refresh rate for flicker free operation and IP65 rating the ZENIT® Z 120 is eminently suitable in TV, film and outdoor use.


Product number:	CLZZ120
Product type:	LED PAR Lighting
Type:	Indoor
Colour spectrum:	RGBW
Number of LEDs:	1
LED type:	120 W (approx. 50,000 operating hours)
Refresh rate:	3,600 Hz
Dispersion:	7 - 55°
DMX input:	5-pin Neutrik X-HD
DMX output:	5-pin Neutrik X-HD
DMX mode:	3-channel, 4-channel, 5-channel, 9-channel, 10-channel, 11-channel, 17-channel
DMX Functions:	Reset, colour jump, RGBW fine, colour macro, strobe, dimmer, zoom, dimmer curve, dimmer fine, dimmer response, zoom fine, colour temperature correction, RGBW, colour fade
Standalone modes:	Static colour, colour jump, colour fade, white balance adjustable, dimmer curve, strobe, colour macro, dimmer response, display lock, master / slave mode
Controls:	Up, mode, Enter, down
Indicators:	Backlit LCD
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	180W
Power connector:	Neutrik powerCON TRUE1 IN (NAC3FX-W) / OUT (NACMF1-W)
Housing material:	Metal
Cabinet colour:	Black
Protection class IP:	65
Cooling:	Convection
Illuminance:	(55°) 3,900 lx @ 1 m, (7°) 62,000 lx @ 1 m
Luminous flux:	2,117 lm
Dimensions without mounting bracket	
Width:	230 mm
Height:	230 mm
Length:	300 mm
Weight:	8.3 kg

NEW!



- ▶ Professional IP65 outdoor PAR can with 4 x 32 W RGBW Osram OSTAR LEDs and 8° beam angle
- ▶ Includes 2 innovative light shaping diffusers for beam angles of 25° or 45° while maintaining transmission efficiency
- ▶ RDM capability
- ▶ 16-bit technology for high-resolution Colours and dimming
- ▶ Flicker free, ideal for motion picture and TV applications
- ▶ Colour temperature and individual LED Colour correction
- ▶ 4 ultra smooth dimming curves and adjustable halogen lamp-like dimming response
- ▶ 7 modes of DMX control plus master, slave and standalone capability
- ▶ OLED display with 4 touch buttons for easy configuration
- ▶ Security lock against unauthorized menu access
- ▶ Convection cooling for noise-free performance
- ▶ Includes IR remote control with batteries



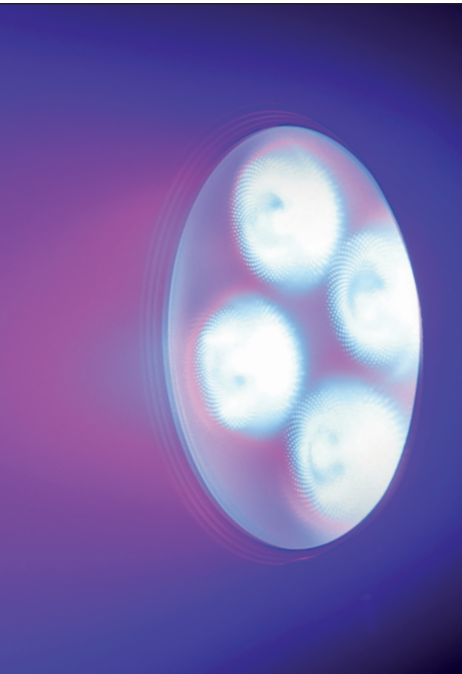

ZENIT P 130

PROFESSIONAL **OUTDOOR PAR IP65**

WITH INNOVATIVE LIGHT SHAPING DIFFUSORS

The Cameo Zenit P130 is an IP65 rated outdoor PAR can with a sharp, tightly focussed beam angle of 8°. For an additional choice of 25° or 45° angles, it comes with two ultra-efficient light shaping diffusers which are specially designed to maintain the fixture's powerful illuminance. The Zenit P130 is equipped with four 32W RGBW Osram OSTAR LEDs for brilliant, uniform Colours while 16-bit technology enables high-resolution Colour mixing and dimming.



Product number:	CLZP130LSD
Product type:	LED OUTDOOR PAR
Type:	ZENIT
Colour spectrum:	RGBW
Number of LEDs:	4
LED type:	32 W Osram OSTAR LED (approx. 50,000 operating hours)
Refresh rate:	3,600 Hz
Dispersion:	8° beam, 14° Field
DMX input:	5-Pol IP65
DMX output:	5-Pol IP65
DMX mode:	2-Channel, 3-Channel, 4-Channel, 8-1 Channel, 8-2-Channel, 10-Channel, 15-Channel
DMX Functions:	Dimmer, dimmer fine, RGBW, RGBW fine, strobe, colour macro, colour jump, colour fade, CTC (colour temperature correction), dimmer curve, dimmer response, reset
Standalone modes:	Master / slave, static colour, colour macro, auto program, colour jump, colour fade, strobe, dimmer response, dimmer curve, display lock, white balance
Controls:	Mode, enter, value down, value up
Indicators:	OLED Display
Operating voltage:	100 V AC - 240 V AC / 50 - 60 Hz
Power consumption:	155 W
AC power Input:	IP65
AC Power THRU:	IP65
Housing material:	Die-cast aluminium
Cabinet colour:	Black
Protection class IP:	65
Cooling:	Convection
Illuminance:	92,600 lx @ 1 m , 2,400 Lumen (RGBW)
Dimensions without mounting	
Bracket (W x H x L):	186.6 x 186.6 x 159 mm
Weight:	4.2 kg

NEW!



- ▶ Professional IP65 outdoor PAR can with 4 x 10 W RGBW Osram OSTAR LEDs and 8° beam angle
- ▶ Includes 2 innovative light shaping diffusers for beam angles of 25° or 45° while maintaining transmission efficiency
- ▶ RDM capability
- ▶ 16-bit technology for high-resolution Colours and dimming
- ▶ Flicker free, ideal for motion picture and TV applications
- ▶ Colour temperature and individual LED Colour correction
- ▶ 4 ultra smooth dimming curves and adjustable halogen lamp-like dimming response
- ▶ 7 modes of DMX control plus master, slave and standalone capability
- ▶ OLED display with 4 touch buttons for easy configuration
- ▶ Security lock against unauthorized menu access
- ▶ Convection cooling for noise-free performance
- ▶ Includes IR remote control with batteries



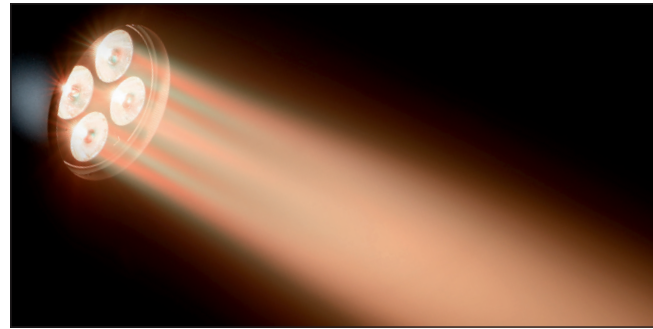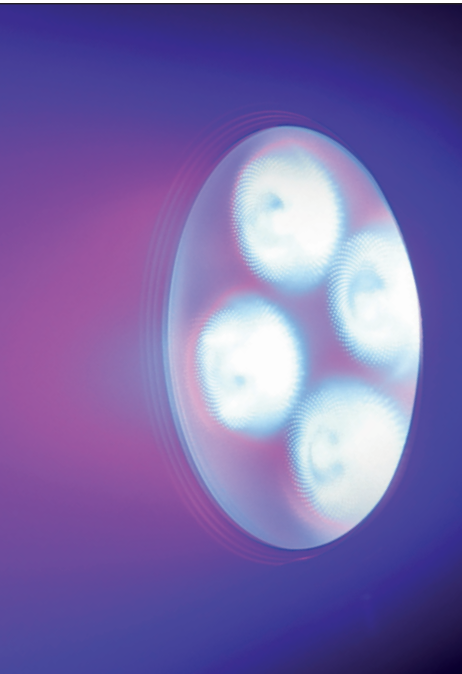

ZENIT P 40

PROFESSIONAL **OUTDOOR PAR IP65**

WITH INNOVATIVE LIGHT SHAPING DIFFUSORS

The Cameo Zenit P40 is an IP65 rated outdoor PAR can with a sharp, tightly focussed beam angle of 8°. For an additional choice of 25° or 45° angles, it comes with two ultra-efficient light shaping diffusers which are specially designed to maintain the fixture's powerful illuminance. The Zenit P40 is equipped with four 10W RGBW Osram OSTAR LEDs for brilliant, uniform Colours while 16-bit technology enables high-resolution Colour mixing and dimming.

Product number:	CLZP40LSD
Product type:	LED OUTDOOR PAR
Type:	ZENIT
Colour spectrum:	RGBW
Number of LEDs:	4
LED type:	10 W Osram OSTAR LED (approx. 50,000 operating hours)
Refresh rate:	3,600 Hz
Dispersion:	7° beam, 13.5° Field
DMX input:	5-Pol IP65
DMX output:	5-Pol IP65
DMX mode:	2-Channel, 3-Channel, 4-Channel, 8-1 Channel, 8-2-Channel, 10-Channel, 15-Channel
DMX Functions:	Dimmer, dimmer fine, RGBW, RGBW fine, strobe, colour macro, colour jump, colour fade, CTC (colour temperature correction), dimmer curve, dimmer response, reset
Standalone modes:	Master / slave, static colour, colour macro, auto program, colour jump, colour fade, strobe, dimmer response, dimmer curve, display lock, white balance
Controls:	Mode, enter, value down, value up
Indicators:	OLED Display
Operating voltage:	100 V AC - 240 V AC / 50 - 60 Hz
Power consumption:	55 W
AC power Input:	IP65
AC Power THRU:	IP65
Housing material:	Die-Cast Aluminium
Cabinet colour:	Black
Protection class IP:	65
Cooling:	Convection
Illuminance:	25,200 lx @ 1 m , 1,300 Lumen (RGBW)
Dimensions without mounting	
Bracket (W x H x L):	186.6 x 186.6 x 159 mm
Weight:	4.2kg



CLPFLATPRO18IP65



CLPFLATPRO12IP65



CLPFLATPRO7IP65

- ▶ High performance with ultra-bright 10W LEDs
- ▶ Super silent due to convection cooling
- ▶ RGBWA colour spectrum for more flexible colour mixing reaching from warm, rich to solid and pastel colours
- ▶ Flicker-free
- ▶ IP65 for outdoor use
- ▶ Rugged flat and compact metal housing



TECHNOLOGY



RGB WA



DMX



MASTER/SLAVE



STROBE EFFECT



STAND ALONE MODE



GREEN SOLUTION



IP65



5 IN 1 LED



FLAT PRO SERIES OUTDOOR 10 W LED PAR CAN RGBWA IN BLACK HOUSING

With their IP65 rating, the Cameo FLAT PRO SERIES professional outdoor PAR lights support stunning, highly creative lighting in the open. High performance ultra-bright 10 W RGBWA LEDs produce a huge range of colours from soft pastel hues to rich, warm tints with a 30° beam angle. In addition, the FLAT PRO outdoor lights 3,000 Hz refresh rate eliminates flicker.


The CLPFLATPRO7IP65, CLPFLATPRO12IP65 and CLPFLATPRO18IP65's die-cast enclosures are rated IP65 according to EN 60529 and totally protected against dust and low pressure water jets from all directions.

Product number:	CLPFLATPRO18IP65 / CLPFLATPRO12IP65 / CLPFLATPRO7IP65
Product type:	LED PAR can
Type:	Flat PAR
Colour range:	RGBWA
Number of LEDs:	18 / 12 / 7
LED type:	10W
Beam angle:	30°
DMX input:	3-pin special connector, screwable
DMX output:	3-pin special connector, screwable
DMX mode:	2-channel, 3-channel-1, 3-channel-2, 5-channel, 8-channel
DMX functions:	Colour jump, colour fade, strobe, master dimmer, RGBWA
Standalone modes:	Colour jump, colour fade, static colour, slave mode, colour macro
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Power connector:	3-pin special screw connector
Housing material:	Metal
Housing colour:	Black
Protection class IP:	65
Type of cooling:	Convection
Illuminance:	23,000 lx @ 1 m / 15,000 lx @ 1 m / 10,000 lx @ 1 m
Dimensions (W x H x L):	280 x 280 x 160 mm / 230 x 230 x 160 mm / 180 x 180 x 160 mm (excl. mntg. bracket)

NEW!





- ▶ Highly flexible IP65 outdoor flood light
- ▶ Ultra flexible colour mixing with rich solid, warm pastel and UV colours
- ▶ Flicker free
- ▶ 6 modes of DMX control plus master, slave and standalone applications
- ▶ 4-button display for intuitive operation
- ▶ Security lock against unauthorized menu access
- ▶ Durable compact size metal enclosure
- ▶ Screw connectors for DMX and mains input and output
- ▶ Incl. universal bracket



Optional Accessory
FLAT PRO FLOOD
BARN DOOR

CLFLOODBARNDOOR

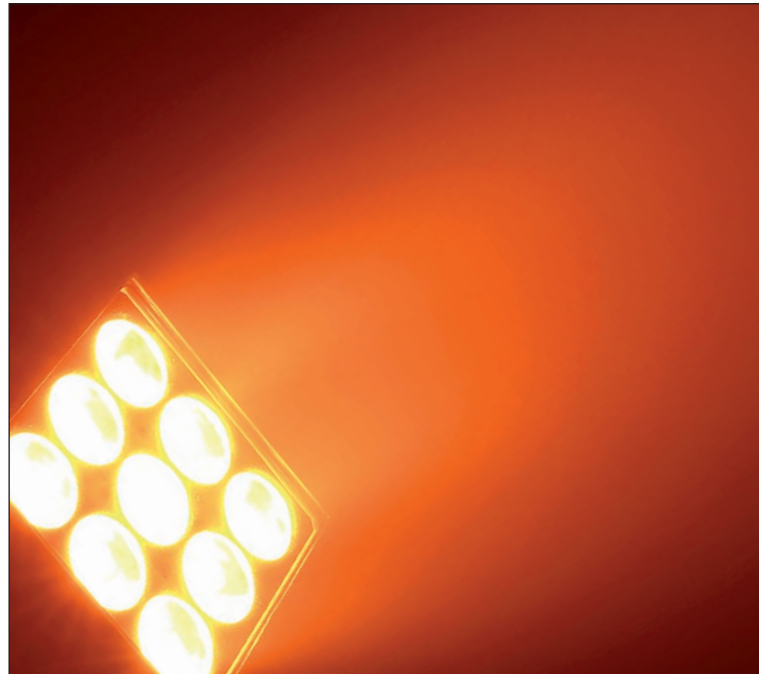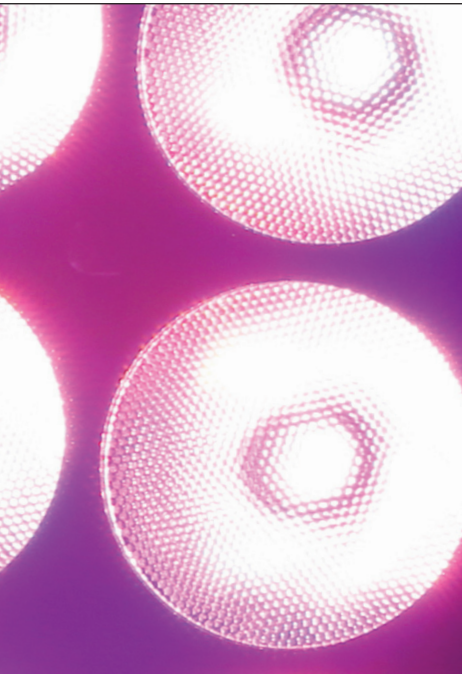


FLAT PRO FLOOD 600 IP65 OUTDOOR FLOOD LIGHT WITH 9X12W RGBWA + UV 6-IN-1 LEDS

The Cameo FLAT PRO series FLOOD 600 IP65 is a compact RDM enabled outdoor flood light equipped with nine 12 watt 6-in-1 LEDs generating rich RGBWA colours, soft pastel hues and intense UV effects. The IP65 rated fixture sports convection cooling, a 40° beam angle and 3,000 Hz refresh rate for flicker free performance. The hardwearing metal enclosure features 3-pin screw connectors for DMX and mains input and output plus a backlit 4-button display for easy, intuitive operation while a security lock prevents unauthorized menu access.

Product number:	CLFLOOD600IP65
Product type:	LED PAR Lighting
Type:	Outdoor
Colour spectrum:	RGBWA+UV
Number of LEDs:	9 x 6
LED type:	12W (approx. 50000 operating hours)
Refresh rate:	3,000Hz
Dispersion:	40°
DMX input:	3-pin special connector, screwable
DMX output:	3-pin special connector, screwable
DMX mode:	3-channel 1, 11-channel, 9-channel, 6-channel, 3-channel 2, 2-channel
DMX Functions:	Colour fade, RGBWA+UV, strobe, master dimmer, colour macro, colour jump
Standalone modes:	Auto programs, colour fade, colour macro, colour jump, static colour, master / slave mode
Controls:	Mode, Value Down, Value Up, Enter
Indicators:	Backlit LCD
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	90 W
Power connector:	3-pin special connector, screwable
Housing material:	Metal
Cabinet colour:	Black
Protection class IP:	65
Cooling:	Convection
Illuminance:	7,500 lx @ 1 m
Dimensions without mounting bracket	
Width:	180 mm
Height:	180 mm
Length:	120 mm
Weight:	3.2 kg




- ▶ 1 x 60W tri-colour COB LED
- ▶ IP65 rated for outdoor applications
- ▶ Flicker-free
- ▶ 120 degrees dispersion for perfect wall-washing effects
- ▶ DMX control plus master, slave and standalone modes
- ▶ Easy to operate via mode, enter, up and down keys with backlit display
- ▶ Menu lock to prevent unauthorized access
- ▶ Compact heavy-duty metal enclosure
- ▶ Universal mounting bracket
- ▶ DMX and mains input and output on screw connectors
- ▶ Barn doors available as accessory



Optional Accessory
 FLAT PRO FLOOD
BARN DOOR

CLFLOOBBARNDOR

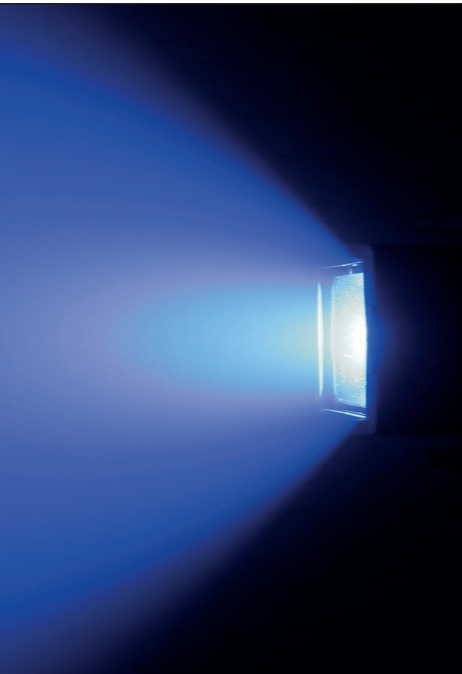


FLAT PRO FLOOD IP65 TRI OUTDOOR FLOOD LIGHT WITH 60 W TRI-COLOUR COB LED IN BLACK HOUSING

The Cameo FLAT PRO series FLOOD IP65 TRI is a compact outdoor LED flood light with IP65 rating, 120° beam angle and convection cooling. A 60 W tri-colour COB LED generates rich, saturated RGB colours with a 3,000 Hz refresh rate providing flicker-free performance. The black heavy-duty metal enclosure features screw connectors for DMX and mains input and output plus a backlit display with mode, enter, up and down keys for easy operation. The Cameo FLOOD IP65 TRI allows for 2-channel, 3-channel 1, 3-channel 2- and 6-channel DMX control as well as master, slave and standalone modes while a setting lock prevents unauthorized menu access. The universal bracket adds a wide variety of mounting options. Barn doors are available as an accessory.

Product number:	CLFLOODIP65TRI
Product type:	LED flood light
Type:	Flat pro
Colour range:	RGB
Number of LEDs:	1
LED type:	60W COB TRI LED
Refresh rate:	3,000 Hz
Dispersion:	120°
DMX input:	3-pin special connector, screwable
DMX output:	3-pin special connector, screwable
DMX mode:	2-channel, 3-channel-1, 3-channel-2, 6-channel
DMX functions:	Colour jump, colour fade, colour macro, strobe, master dimmer, RGB
Standalone modes:	Colour jump, colour fade, static colour, master/slave mode, colour macro, auto run
Controls:	Mode, enter, value up, value down
Indicators:	Backlit LC display
Operating voltage:	110 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	75 W
Power connector:	3-pin special connector, screwable
Housing material:	Metal
Housing colour:	Black
Protection class IP:	65
Type of cooling:	Convection
Illuminance:	830 lx @ 1 m
Dimensions (W x H x L):	180 x 180 x 120 mm (excluding mounting bracket)




- ▶ 1 x 50 W warm white COB LED
- ▶ IP65 rated for outdoor applications
- ▶ Flicker-free
- ▶ 120 degrees dispersion for perfect wall-washing effects
- ▶ DMX control plus master, slave and standalone modes
- ▶ Easy to operate via mode, enter, up and down keys with backlit display
- ▶ Menu lock to prevent unauthorized access
- ▶ Compact heavy-duty metal enclosure
- ▶ Universal mounting bracket
- ▶ DMX and mains input and output on screw connectors
- ▶ Barn doors available as accessory



Optional Accessory
 FLAT PRO FLOOD
 BARN DOOR

CLFLOODBARNDOOR

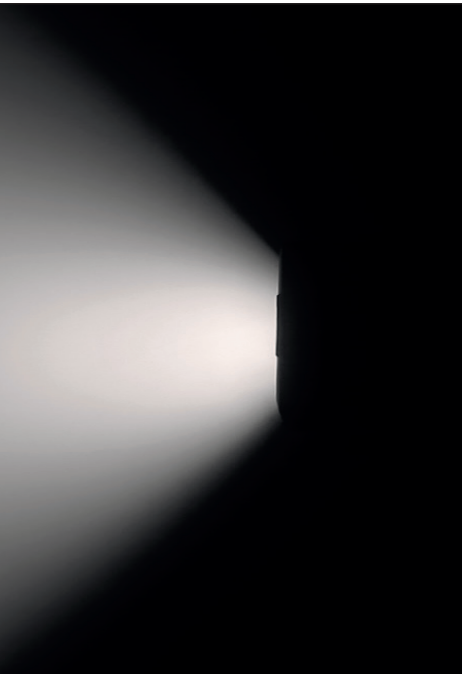

FLAT PRO FLOOD IP65 WW OUTDOOR FLOOD LIGHT WITH 50 W WARM WHITE COB LED IN BLACK HOUSING


The Cameo FLAT PRO series FLOOD IP65 WW is a compact outdoor LED flood light with IP65 rating, 120° beam angle and convection cooling. A 50 W COB LED generates bright warm white light with a 3,000 Hz refresh rate providing flicker-free performance. The black heavy-duty metal enclosure features screw connectors for DMX and mains input and output plus a backlit display with mode, enter, up and down keys for easy operation. The Cameo FLOOD IP65 WW allows for 1-channel and 3-channel DMX control as well as master, slave and standalone modes while a setting lock prevents unauthorized menu access. The universal bracket adds a wide variety of mounting options. Barn doors are available as an accessory.

Product number:	CLFLOODIP65WW
Product type:	LED flood light
Type:	Flat pro
Colour range:	Warm white
Number of LEDs:	1
LED type:	50 W COB LED
Refresh rate:	3,000 Hz
Dispersion:	120°
DMX input:	3-pin special connector, screwable
DMX output:	3-pin special connector, screwable
DMX mode:	1-channel, 3-channel
DMX functions:	Strobe, master dimmer, dimmer curve
Standalone modes:	Static, master / slave mode, strobe
Controls:	Mode, enter, value up, value down
Indicators:	Backlit LC display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	65 W
Power connector:	3-pin special connector, screwable
Housing material:	Metal
Housing colour:	Black
Protection class IP:	65
Type of cooling:	Convection
Illuminance:	1,700 lx @ 1 m
Dimensions (W x H x L):	180 x 180 x 120 mm (excluding mounting bracket)



- ▶ 12 x 3W high-power tri-RGB LEDs
- ▶ IP65 for outdoor use
- ▶ Operated via DMX, in master / slave mode or standalone mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Rugged compact metal housing



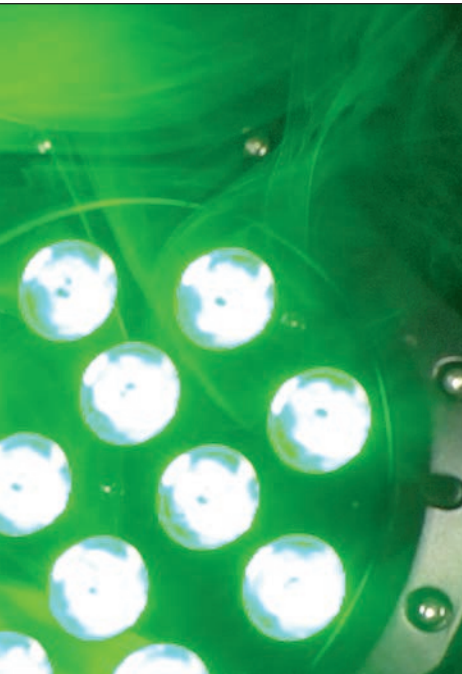

OUTDOOR PAR TRI 12 IP65

12 X 3 W TRI-COLOUR LED OUTDOOR PAR CAN RGB IN BLACK HOUSING

The Cameo CLPSTTRI12IP is a heavy-duty PAR light with twelve 3 W tri-colour LEDs for smooth RGB colour mixing and a focused 25° beam angle. It is especially intended for professional outdoor applications featuring purpose-designed screw connectors and an IP65 rating. The CLPSTTRI12IP can be controlled via DMX and provides a variety of colour macro, jump, fade and strobe functions. It is also capable of slave and standalone operation with mode, enter, value up and down keys and a clear LED display permitting easy menu access. The Cameo CLPSTTRI12IP is equipped with dual brackets that are easily adjustable for multiple mounting options.

Product number:	CLPSTTRI12IP
Product type:	LED PAR can
Type:	Outdoor PAR
Colour range:	RGB
Number of LEDs:	12
LED type:	3 W tri-colour
Beam angle:	25°
DMX input:	3-pin special connector, screwable
DMX output:	3-pin special connector, screwable
DMX mode:	2-channel, 3-channel 1, 3-channel 2, 6-channel
DMX functions:	RGB, master dimmer, strobe, colour macro, colour jump, colour fade
Standalone modes:	Static colour, colour change, colour fading, slave
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Power connector:	3-pin special connector, screwable
Housing material:	Metal
Protection class IP:	65
Illuminance:	5,900 lx @ 1 m
Dimensions (W x H x L):	203 x 203 x 193 mm (excluding mounting bracket)

NEW!



- ▶ 12 ultra-bright 12 W RGBWA+UV LEDs
- ▶ IP65 classification for outdoor use
- ▶ Absolutely noiseless and flicker-free operation
- ▶ 7 DMX modes plus operation as a standalone, master or slave
- ▶ RDM enabled
- ▶ Bold primary colours, pastel and UV tones
- ▶ Colour macros that are adjusted for LEE filters
- ▶ Single Pixel Control for effective Chase effects
- ▶ Colour temperature correction
- ▶ 4 dimmer curves
- ▶ Neutrik powerCON TRUE1 and 5-pin X-HD power and DMX sockets
- ▶ Access lock against unauthorised changes to the menu settings
- ▶ Rugged housing made of die-cast aluminium
- ▶ Two diffusion filters and one lens hood included





PIXBAR 600 PRO IP65

RDM ENABLED 12 X 12 W RGBWA+UV

OUTDOOR LED BAR

Featuring 12 ultra bright 12 watt 6-in-1 LEDs and 22° beam width the Cameo PixBar 600 PRO IP65 creates impressive RGBWA+UV washes. Highly efficient convection cooling ensures noiseless performance, and with a 3,600 Hz refresh rate the IP65 rated outdoor fixture is flicker-free and suitable for TV and motion picture applications. The wash light comes with 2 diffusors to change beam and field angles from 22° and 72° to 52° and 92° while providing smooth lighting with minimum dazzle.

Product number:	CLPIXBAR600PROIP65
Product type:	LED Bars
Type:	Outdoor
Colour spectrum:	RGBWA+UV
Number of LEDs:	12
LED type:	12 W 6 in 1 colour
Dispersion:	(Beam) 52° / (Field) 92°, (Beam) 22° / (Field) 72°
Refresh rate:	3,600 Hz
DMX input:	5-pin Neutrik X-HD
DMX output:	5-pin Neutrik X-HD
DMX mode:	74-channel, 78-channel, 8-channel, 6-channel 1, 2-channel, 12-channel, 6-channel 2
DMX Functions:	Single pixel control, colour temperature correction, dimmer, strobe, colour jump, colour fade, 14 auto modes, colour macro, sound programs
Standalone modes:	Static colour, strobe, 14 auto modes, sound programs
Controls:	Mode, enter, value up, value down
Indicators:	Backlit LCD
Operating voltage:	110 V AC - 240 V AC / 50 – 60 Hz
Power consumption:	160 W
Power connector:	Neutrik powerCON TRUE1 IN (NAC3FX-W) / OUT (NACMFY-W)
Housing material:	Die-cast aluminium
Cooling:	Convection
Cabinet colour:	Black
Illuminance:	1,250lx @ 1 m
Protection class IP:	65
Dimensions without mounting bracket	
Width:	854 mm
Height:	130 mm
Depth:	90 mm
Weight:	6.2 kg



POWER EXTENSION CABLE IP65

IP65

Product number:	CLPEX001
Product type:	Extension cable
Type:	power cord
Protection class IP:	65
Length:	1 m

Product number:	CLPEX003
Product type:	Extension cable
Type:	power cord
Protection class IP:	65
Length:	3 m

Product number:	CLPEX005
Product type:	Extension cable
Type:	power cord
Protection class IP:	65
Length:	5 m

Product number:	CLPEX010
Product type:	Extension cable
Type:	power cord
Protection class IP:	65
Length:	10 m

Product number:	CLPEX020
Product type:	Extension cable
Type:	power cord
Protection class IP:	65
Length:	20 m



IP65

DMX EXTENSION CABLE IP65

Product number:	CLDMXEX001
Product type:	Extension cable
Type:	DMX cable
Protection class IP:	65
Length:	1 m

Product number:	CLDMXEX003
Product type:	Extension cable
Type:	DMX cable
Protection class IP:	65
Length:	3 m

Product number:	CLDMXEX005
Product type:	Extension cable
Type:	DMX cable
Protection class IP:	65
Length:	5 m

Product number:	CLDMXEX010
Product type:	Extension cable
Type:	DMX cable
Protection class IP:	65
Length:	10 m

Product number:	CLDMXEX020
Product type:	Extension cable
Type:	DMX cable
Protection class IP:	65
Length:	20 m

NEW!

LED OUTDOOR FIXTURES



DMX ADAPTER OUT **ADAPTER CABLE** FOR IP65 OUTDOOR PROJECTOR IP65 PLUG TO XLR FEMALE 3-PIN

IP65

DMX Adapter Output for CLPSTTRI12IP, CLFLOODIP65TRI, CLFLOODIP65WW,
CLPFLATPRO12IP65, CLPFLATPRO18IP65, CLPFLATPRO7IP65.

Product number:	CLDMXADAPTEROUT
Product type:	LED PAR Lighting Accessories
Type:	DMX Adapter
Connector 1:	DMX IP65 male
Connector 2:	XLR female
Length:	1 m
Weight:	0.12 kg




MILLIONS SAW THE APPLE FALL,
ISAAC NEWTON ASKED "WHY"?

MILLIONS SAW STANDS BREAK,
WE ASKED "WHY"?



DISCOVER OUR INNOVATIVE PREMIUM STANDS

available colours:



CATEGORY
MICROPHONE
STANDS

DESIGNED & ENGINEERED
IN GERMANY.



www.facebook.com/gravitystands
www.youtube.com/gravitystands
blog.adamhall.com

find out more:
www.gravitystands.com
Gravity® is a brand of the Adam Hall Group.

NEW!



- ▶ Ultra-bright 30 W COB LEDs
- ▶ LED single pixel control for stunning chase and pixel-mapping effects
- ▶ Absolutely silent operation due to efficient convection cooling
- ▶ Flicker-free
- ▶ Professional connectivity with 3 and 5-pin DMX and Neutrik powerCON I/O
- ▶ RDM-enabled
- ▶ 5-mode DMX control plus standalone operation with master and slave modes
- ▶ 4 selectable dimming curves
- ▶ Colour temperature correction
- ▶ 3 preset temperatures of white: warm white, white, cool white
- ▶ Rugged die-cast aluminium housing



LED BARS



PIXBAR 650C PRO PROFESSIONAL 8 X 30 W COB LED BAR

The Cameo PixBar 650C PRO is a 53° beam width professional LED bar with 8 ultra-bright 30 W COB-LEDs for solid colour mixing with seamless transition. Highly efficient convection cooling and a 3,600 Hz refresh rate ensure absolutely noiseless operation and flicker-free performance. The PixBar 650C PRO is fully RDM compatible for bi-directional communication with a dedicated controller providing addressing, configuration and status reporting of the fixture. It is capable of standard DMX control in five modes and standalone, master or slave operation. The PixBar 650C PRO also features autorun software, a built-in microphone for sound control and a backlit display with mode, enter, up and down keys for manual control. In addition to rich RGB colours and macros calibrated to the LEE filters standard, the PixBar 650C PRO provides colour temperature correction, four selectable dimming curves and single pixel control for impressive chase effects.


Product number:	CLPIXBAR650CPRO
Product type:	LED BAR
Type:	Washer
Colour range:	RGB
Number of LEDs:	8
LED type:	30 W COB
Refresh rate:	3,600 Hz
Dispersion:	53°
DMX input:	XLR 3-pin male, XLR 5-pin male
DMX output:	XLR 3-pin female, XLR 5-pin female
DMX mode:	2-channel, 3-channel, 3-channel, 9-channel, 30-channel
DMX functions:	Pixel control, 13 auto modes, sound mode, colour macros, dimmer, strobe, colour temperature correction
Standalone modes:	14 auto modes, sound mode, static, strobe, auto run
Controls:	Mode, enter, value up, value down
Indicators:	LC display
Power supply:	110 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	250 W
Power connector:	Neutrik powerCON
Cooling system:	Convection
Illuminance:	Single LED 700 lx @ 1 m
Housing material:	Die-cast aluminium
Housing colour:	Black
Dimensions (W x H x D):	880 x 110 x 130 mm (excl. mntg. bracket)



- ▶ 6 ultra bright 8W Quad-LEDs
- ▶ LED single pixel control for stunning chase and pixel mapping effects
- ▶ Absolutely silent operation due to efficient convection cooling
- ▶ Flicker free
- ▶ Professional connectivity with 3 and 5-pin DMX and Neutrik powerCON I/O
- ▶ RDM enabled
- ▶ 7-mode DMX control plus standalone operation with master and slave modes
- ▶ Diffusion lens included for a smooth wash with minimum dazzle
- ▶ 4 selectable dimming curves
- ▶ Colour temperature correction
- ▶ 3 temperatures of white: warm white, white, cool white
- ▶ Rugged die-cast aluminium housing



LED BARS

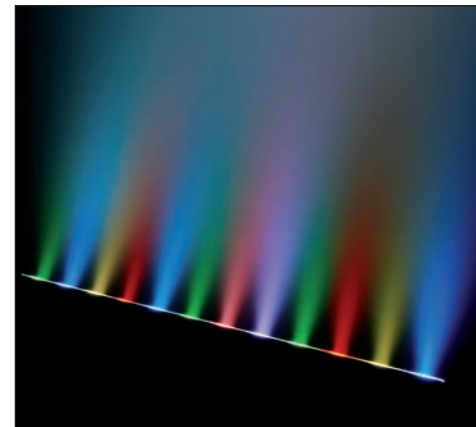

PIXBAR 400 PRO PROFESSIONAL 12 X 8 W RGBW LED BAR

The Cameo PixBar 400 PRO is a professional LED bar with 12 ultra bright 8 watt Quad-LEDs and RDM compatibility enabling bi-directional communication. It provides vibrant RGBW colour mixes, 4 selectable dimming curves, macros calibrated to the LEE filters standard and single pixel control for stunning chase effects.

Attached to a dedicated controller the RDM protocol enhancement allows convenient addressing, configuration and status monitoring of the PixBar 400 PRO. The fixture is also capable of standard DMX control in 7 modes and standalone, master or slave operation. It features autorun software, a built-in microphone for music control and a backlit display with Mode, Enter, Up and Down keys for manual control.


Product number:	PIXBAR400PRO
Product type:	LED bar
Type:	Washer
Colour range:	RGBW
Number of LEDs:	12
LED type:	8 W 4-in-1
Refresh rate:	3,600 Hz
Dispersion:	18°
DMX input:	XLR 3-pin male, XLR 5-pin male
DMX output:	XLR 3-pin female, XLR 5-pin female
DMX mode:	2-channel, 4-1-channel, 4-2-channel, 6-channel, 10-channel, 50-channel, 54-channel
DMX functions:	Pixel control, 14 auto modes, sound mode, colour macros, dimmer, strobe, colour temperature correction
Standalone modes:	14 auto modes, sound mode, static, strobe
Controls:	Mode, enter, value up, value down
Indicators:	LC display
Power supply:	110 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	75 W
Power connector:	Neutrik powerCON
Cooling system:	Convection
Illuminance:	Single LED 550 lx @ 1 m
Housing material:	Die-cast aluminium
Housing colour:	Black
Dimensions (W x H x D):	900 x 117 x 70 mm (excl. mntg. bracket)



- ▶ Ultra-bright 12 W RGBWA+UV LEDs
- ▶ LED single pixel control for stunning chase and pixel-mapping effects
- ▶ Absolutely silent operation due to efficient convection cooling
- ▶ Flicker-free
- ▶ Professional connectivity with 3 and 5-pin DMX and Neutrik powerCON I/O
- ▶ RDM-enabled
- ▶ 7-mode DMX control plus standalone operation with master and slave modes
- ▶ Diffusion lens included for a smooth wash with minimum dazzle
- ▶ 4 selectable dimming curves
- ▶ Colour temperature correction
- ▶ 3 preset temperatures of white: warm white, white, cool white
- ▶ Rugged die-cast aluminium housing



LED BARS

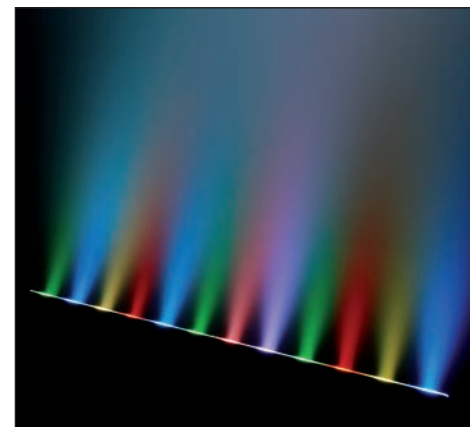


PIXBAR 600 PRO / PIXBAR 500 PRO PROFESSIONAL 12X12W/6X12W RGBWA+UV LED BAR

The Cameo PixBar 600/500 PRO is a wide-angle, convection-cooled LED bar for professional use, equipped with 12/6 super-bright 12W RGBWA+UV LEDs. It operates absolutely noiselessly and is flicker-free due to its high refresh rate of 3,600 Hz. In addition to the almost unlimited range of colours that can be varied in temperature as well as the macros that are aligned with LEE filters, the PixBar offers three preset temperatures of white and four selectable dimmer curves. With the single pixel control, all LEDs can also be individually adjusted to achieve impressive chase effects. The fully RDM-enabled PixBar 600/500 PRO can communicate bidirectionally with RDM-controllers, to provide the address, status, and all parameters of the device. Naturally, the light bar can also be controlled via the standard DMX protocol in seven control modes or used as a standalone, master and slave; it features 14 automatic modes and a built-in microphone for sound control.

Product number:	CLPIXBAR600PRO	CLPIXBAR500PRO
Product type:	LED bar	LED bar
Type:	Washer	Washer
Colour range:	RGBWA+UV	RGBWA+UV
Number of LEDs:	12	6
LED type:	12 W	12 W
Refresh rate:	3,600 Hz	3,600 Hz
Beam angle:	23° at 600 lx, 41° at 1,120 lx	23° at 600 lx, 41° at 1,120 lx
DMX input:	XLR 3-pin male, XLR 5-pin male	XLR 3-pin male, XLR 5-pin male
DMX output:	XLR 3-pin female, XLR 5-pin female	XLR 3-pin female, XLR 5-pin female
DMX mode:	2-channel, 6 channel 1, 6 channel 2, 8-channel, 12-channel, 74-channel, 78-channel	2-channel, 6-channel 1, 6 channel 2, 8-channel, 12-channel, 38-channel, 42-channel
DMX functions:	Single pixel control, 14 auto modes, sound mode, colour macros, dimmer, strobe	Single pixel control, 14 auto modes, sound mode, colour macros, dimmer, strobe
Standalone modes:	14 auto modes, sound mode, static, strobe	14 auto modes, sound mode, static, strobe
Controls:	Mode, enter, value up, value down	Mode, enter, value up, value down
Indicators:	LC display	LC display
Power supply:	110 V AC - 240 V AC, 50 - 60 Hz	110 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	160 W	90 W
Power connector:	Neutrik powerCON	Neutrik powerCON
Cooling system:	Convection	Convection
Illuminance:	Single LED 1,190 lx @ 1 m	Single LED 1,190 lx @ 1 m
Housing material:	Die-cast aluminium	Die-cast aluminium
Housing colour:	Black	Black
Dimensions (W x H x D):	900 x 120 x 75 mm (excl. mntg. bracket)	450 x 120 x 75 mm (excl. mntg. bracket)



- ▶ 12 ultra-bright 3 W tri-LEDs
- ▶ 3 individually controllable quartets of LEDs
- ▶ Includes IR remote control with batteries
- ▶ Convection cooling for noiseless operation
- ▶ 5 mode DMX control plus master, slave and standalone modes
- ▶ Built-in microphone for sound control
- ▶ Backlit display with 4 function keys for easy manual operation
- ▶ IEC mains input and output for serial connection
- ▶ Rugged metal enclosure with roping eye and universal mounting angles
- ▶ Available in black or white

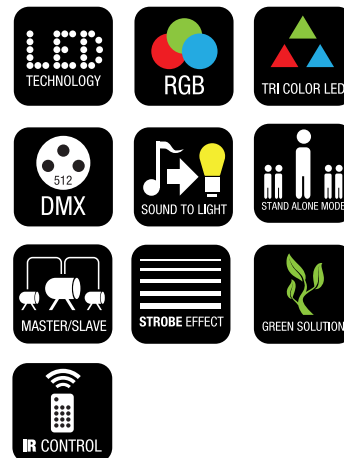

LED BARS




TRIBAR 200 IR

12 X 3 W TRI-LED BAR IN BLACK OR WHITE HOUSING WITH IR REMOTE CONTROL

Featuring twelve ultra-bright 3 W tri-LEDs, convection cooling for noiseless operation and five DMX modes the Cameo TriBar 200 IR is just right for versatile lighting design. The LEDs are individual controllable in quartets. The RGB bar sports a 20° beam angle, standalone, master and slave modes with twelve autorun programmes and a built-in microphone for music control. A backlit display with four function keys and the IR remote control allow convenient manual operation. The rugged metal enclosure is equipped with 3-pin DMX and IEC mains inputs and outputs for easy daisy chaining and adjustable mounting angles, power consumption is remarkably low at 50 W. The Cameo TriBar 200 IR is available in black or white.



Product number:	CLTRIBAR200IR (black housing) / CLTRIBAR200IRWH (white housing)
Product type:	LED bar
Type:	Washer
Colour range:	RGB
Number of LEDs:	12
LED type:	3 W tri-colour
Dispersion:	20°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	2-channel, 3-1 channel, 3-2 channel, 9-channel, 12-channel
DMX functions:	Master dimmer, colour macros, 12 programmes, sound control, strobe, 3 sections RGB
Standalone modes:	Colour macros, 12 programmes, sound control, strobe, auto mode, slave mode
Controls:	Enter, value up, value down, mode
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC / 50 - 60 Hz
Power consumption:	50 W
Power connector:	IEC power connector male, IEC power connector female
Housing material:	Metal
Cooling system:	Convection
Illuminance:	2,340 lx @ 1 m
Housing colour:	Black / white
Dimensions (W x H x D):	1,022 x 66 x 65 mm (excluding mounting bracket)

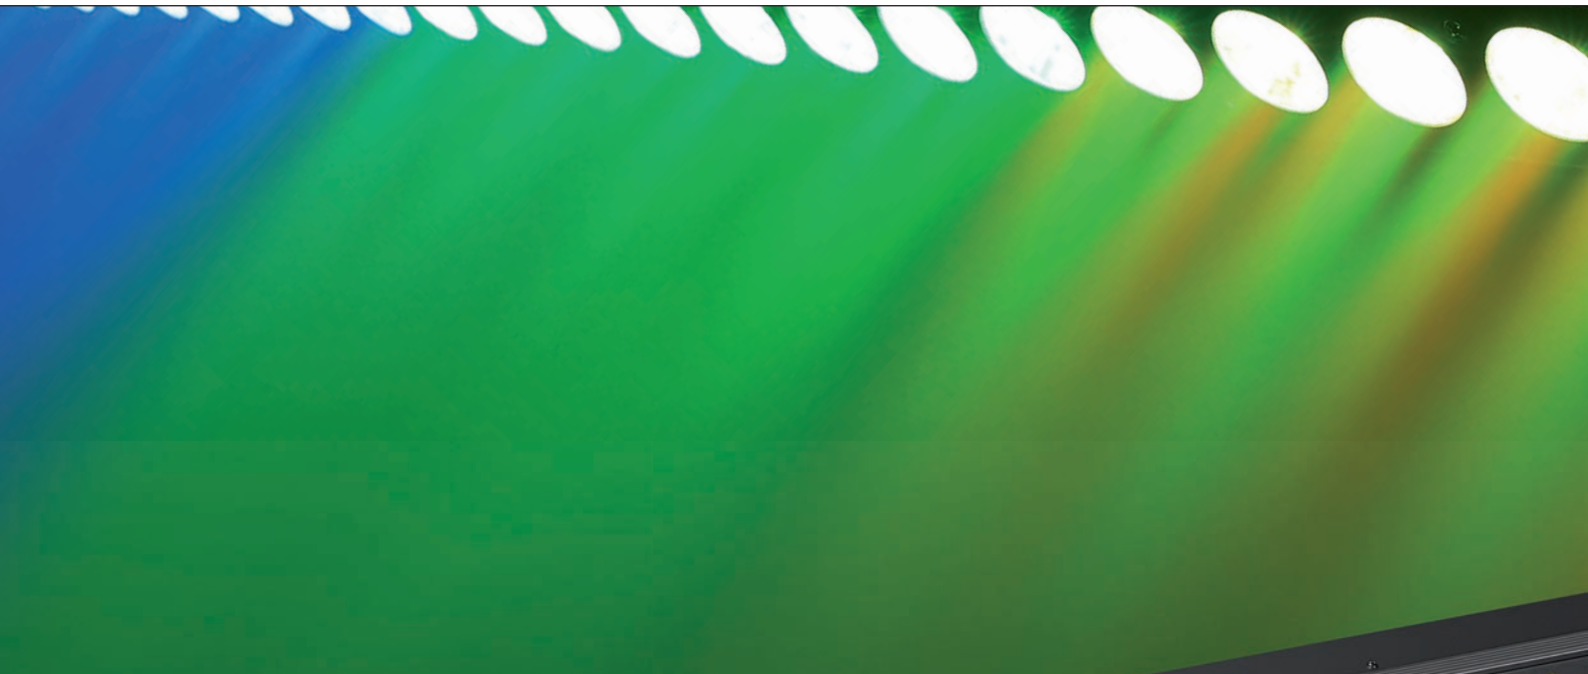

- ▶ 24 ultra bright 3W Tri-LEDs
- ▶ 3 individually controllable octets of LEDs
- ▶ Includes IR remote control with batteries
- ▶ Convection cooling for noiseless operation
- ▶ 5 mode DMX control plus master, slave and standalone modes
- ▶ Built-in microphone for sound control
- ▶ Backlit display with 4 function keys for easy manual operation
- ▶ IEC mains input and output for serial connection
- ▶ Rugged metal enclosure with roping eye and universal mounting angles



LED BARS

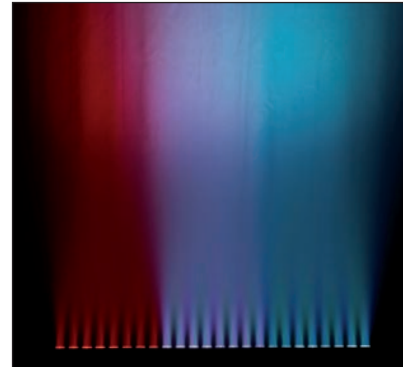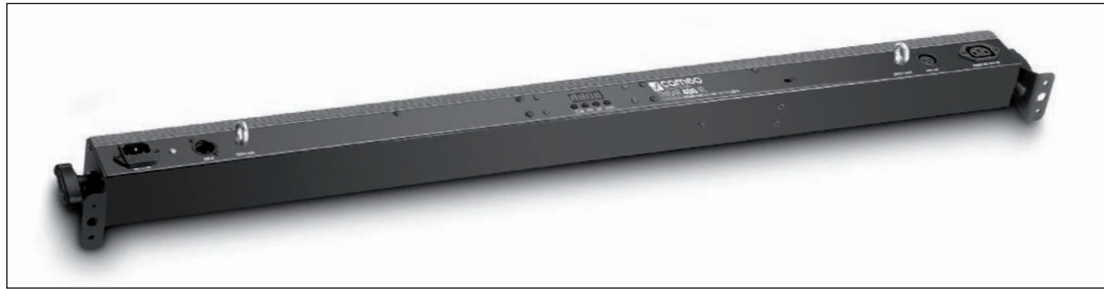

TRIBAR 400 IR

24 X 3 W TRI LED BAR IN BLACK HOUSING WITH IR REMOTE CONTROL


Featuring 24 ultra bright 3W Tri-LEDs, convection cooling for noiseless operation and 5 DMX modes the Cameo TriBar 400 IR is just right for versatile lighting design. The LEDs are individually controllable in octets for stunning chase effects. The RGB washer sports a 20° beam angle, master, slave and standalone modes with 12 autorun programs and a built-in microphone for sound control. A backlit 4-button display and the IR remote control allow convenient manual operation. The rugged metal enclosure is equipped with 3-pin DMX and IEC mains inputs and outputs for easy daisy chaining and adjustable mounting angles, power consumption is remarkably low at 75 watts.

Product number:	CLTRIBAR400IR
Product type:	LED Bars
Type:	Indoor
Colour spectrum:	RGB
Number of LEDs:	24
LED type:	3 W TRI Colour
Dispersion:	20°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	9-channel, 2-channel, 12-channel, 3-channel 1, 3-channel 2
DMX Functions:	colour macro, master dimmer, sound control, strobe, 12 Programs, 3 sectionen RGB
Standalone modes:	12 Programs, strobe, slave mode, sound control, colour macro, auto programs
Controls:	mode, Enter, down, up
Indicators:	LED Display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	75W
Power connector:	IEC power connector female, IEC power connector male
Housing material:	metal
Cooling:	Convection
Cabinet colour:	black
Illuminance:	4380lx@1m
Width:	1007mm
Height:	65mm
Depth:	65mm
Weight:	2.6kg



- ▶ UV bar with convenient infrared remote control
- ▶ 12 brilliant 3 W UV LEDs with 65° beam angle
- ▶ Convection cooling for noiseless operation
- ▶ DMX control, master, slave and standalone modes
- ▶ Strobe and dimming effects
- ▶ Stiff, rugged metal enclosure with 2 roping eyes
- ▶ Comes with universal mounting angles for optimum alignment



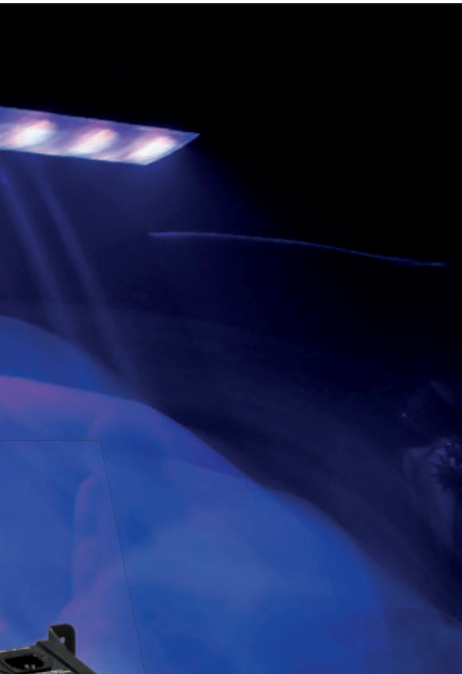

UVBAR 200 IR

12 X 3 W UV LED BAR WITH IR REMOTE CONTROL

The Cameo UVBar 200 IR is a blacklight bar with twelve super bright 3W ultraviolet LEDs, 65° beam angle and convection cooling for noiseless operation. It features DMX control, standalone, master and slave modes with dimmer and strobe effects and a built-in microphone for sound activation. For manual operation, the UVBar 200 comes with a convenient handheld infrared control. The rugged metal enclosure is equipped with 3-pin DMX and IEC mains inputs and outputs for easy daisy chaining and adjustable mounting angles.


Product number:	CLUVBAR200IR
Product type:	LED bar
Type:	Washer
Colour spectrum:	UV
Number of LEDs:	12
LED type:	3 W UV
Refresh rate:	3,000 Hz
Dispersion:	65°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	2-channel, dimmer, strobe
DMX functions:	Master, dimmer, strobe
Standalone modes:	Master dimmer, strobe, sound control
Controls:	Enter, value up, value down, mode
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC / 50 - 60 Hz
Power consumption:	35 W
Power connector:	IEC power connector male, IEC power connector female
Housing material:	Metal
Cooling system:	Convection
Housing colour:	Black
Dimensions (W x H x D):	1,022 x 66 x 67 mm (excluding mounting bracket)



- ▶ 252 powerful, long-life 10 mm RGBA LEDs
- ▶ RGBA for warm, rich colour mixing
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Can be operated in one block or separately in 4 equal blocks
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED display
- ▶ Universal mounting brackets included
- ▶ Rugged slim metal housing



LED BARS

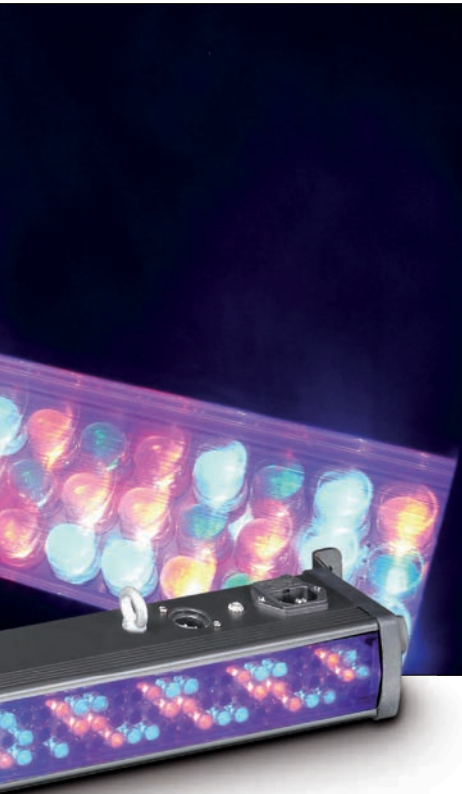


LED BAR

252 X 10 MM LED RGBA COLOUR BAR IN BLACK OR WHITE HOUSING

The Cameo CLBARL10RGBA/WH is a slim, versatile light bar: it can be used in clubs and discos, stage design and interior decorating, even in residential spaces. It has 252 powerful, long-life 10 mm LEDs in the colours red, green, blue, and amber which ensure brilliant, even lighting with the basic colours and any desired mixed colours with a defined beam angle of 30°. The bar can be locked in position using the two mounting brackets and has two eyebolts for mounting and securing. Input / output power and DMX connectors on both ends make it possible to control multiple Cameo light bars in series. Moreover, it impresses with a low power consumption of 40W and minimal generation of heat.


Product number:	CLBARL10RGBA (black housing) / CLBARL10RGBAWH (white housing)
Product type:	Light bar
Type:	Washer
Colour range:	RGBA
Number of LEDs:	252
LED type:	10 mm
Beam angle:	30°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	4-channel, 2-channel, 19-channel, 3-channel, 6-channel
DMX functions:	Master dimmer, colour macro, colour jump, colour fade, strobe, sound control, RGBA
Standalone modes:	Static colour, auto run, sound control, slave mode, colour jump, 10 programmes, colour fade
Controls:	Mode, enter, value up, value down
Indicators:	LC display
Power supply:	100 V AC - 250 V AC
Power consumption:	40 W
Power connector:	IEC power connector
Housing material:	Metal
Housing colour:	White
Dimensions (W x H x D):	1,018 x 63 x 87 mm (excluding mounting bracket)

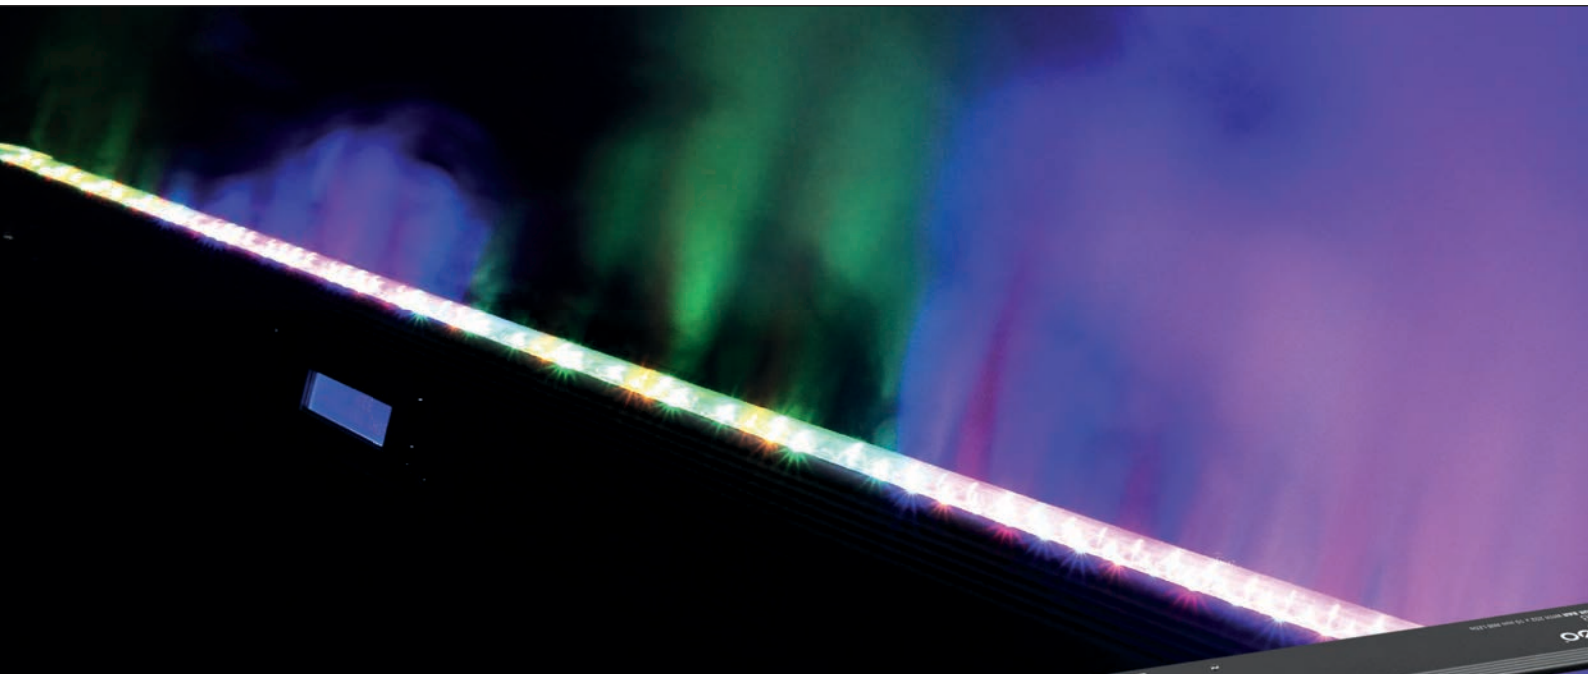

- ▶ 252 luminous, long-lasting 10 mm RGB LEDs
- ▶ RGB for warmer, richer colours
- ▶ Operating in one block or separately in 3 equal blocks
- ▶ Supplied with IR remote control
- ▶ Operation via DMX, in Master/Slave mode or as a single projector
- ▶ Built-in microphone for sound-control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Rugged metal housing with universal mounting brackets
- ▶ Power input and output jacks for serial connection



LED BARS

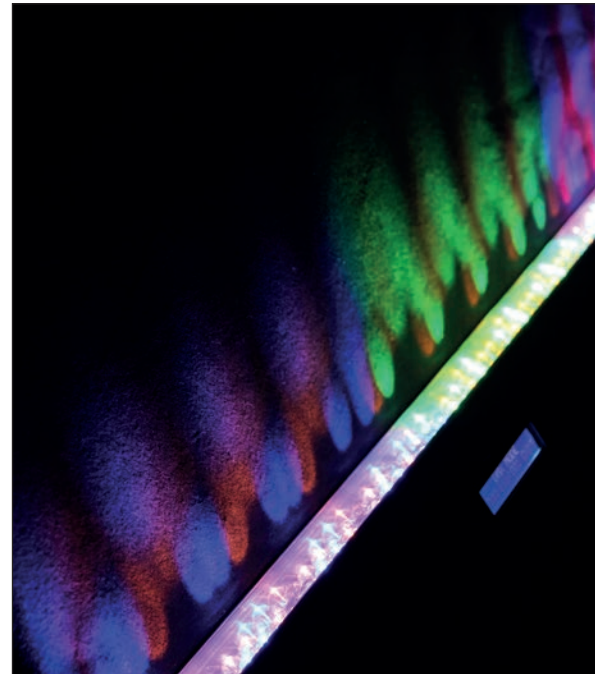

LED BAR IR

252 X 10 MM **LED RGB COLOUR BAR** IN BLACK OR WHITE HOUSING WITH IR REMOTE CONTROL

The Cameo CLBARL10RGBIR is a super slim washer with RGB colour mixing, a 30° beam angle and comfortable IR remote control. With a total of 252 long-lasting and energy-efficient 10 mm LEDs, the ultra-bright light bar with a robust metal housing provides effective, rich colour wallpapers in bars, discos and on the stage. The CLBARL10RGBIR can be operated via 5 DMX modes, as master, slave and standalone or in one block or separately in three equal blocks. Twelve programmes and the built-in microphone for music control ensure functionality, the manual setting is very easily done on a bright LED display using four buttons. With 3-pin XLR-connectors for input and loop-through of the DMX-signal, as well as IEC-sockets for the power supply and output the Cameo CLBARL10RGBIR is equipped for serial connection. Universal mounting brackets offer extensive possibilities for mounting and alignment. Also available in white (CLBARL10RGBIRWH), IR remote control is included.

Product number:	CLBARL10RGBIR (black housing), CLBARL10RGBIRWH (white housing),
Product type:	Light bar
Type:	Washer
Colour range:	RGB
Number of LEDs:	252
LED type:	10 mm
Dispersion:	30°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	2-channel, 3-channel 1, 3-channel 2, 9-channel, 12-channel
DMX functions:	Programme, RGB, sound control, colour macro, strobe
Standalone modes:	Sound control, 12 programmes, colour macro, auto run, slave mode
Controls:	Mode, enter, value up, value down, IR remote
Indicators:	LED display
Power supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	40 W
Power connector:	IEC power connector female, IEC power connector male
Housing material:	Metal
Housing colour:	Black, white
Dimensions (W x H x D):	1,018 x 63 x 87 mm (excluding mounting bracket)






- ▶ Professional show laser with up to 1,000 mW output power
- ▶ High-speed high performance 30 Kpps galvo scanners @ 8 degrees ILDA
- ▶ 128 pattern presets
- ▶ Precision beams with minimum divergence for razor-sharp projections
- ▶ ILDA, DMX and sound control
- ▶ Master, slave and standalone modes
- ▶ Display with 4 function keys for easy manual operation
- ▶ Scan Fail Safety system
- ▶ Neutrik powerCON mains inputs and outputs
- ▶ Dust proof aluminium enclosure for minimum maintenance



Available versions:



LASERS

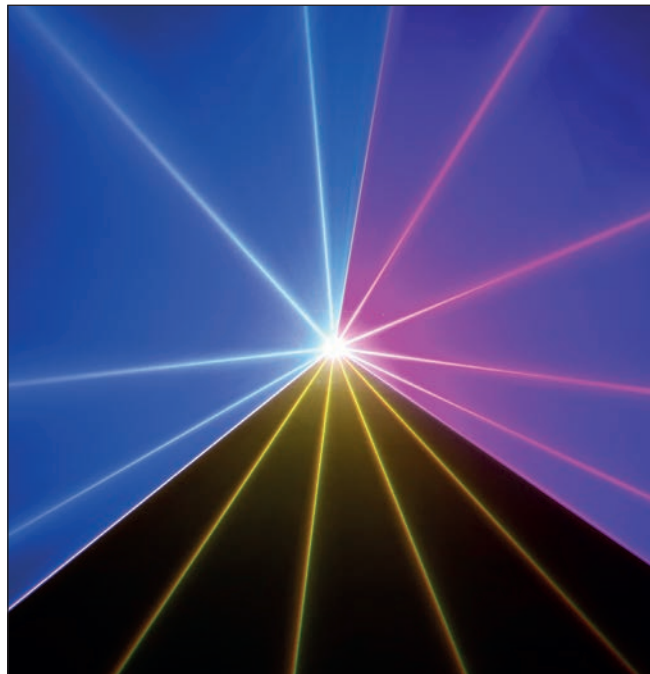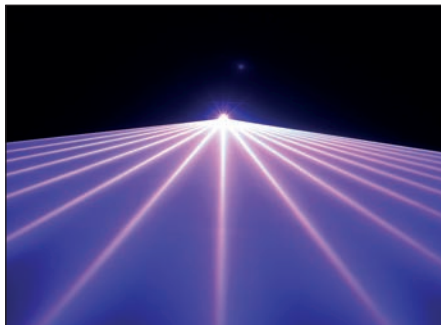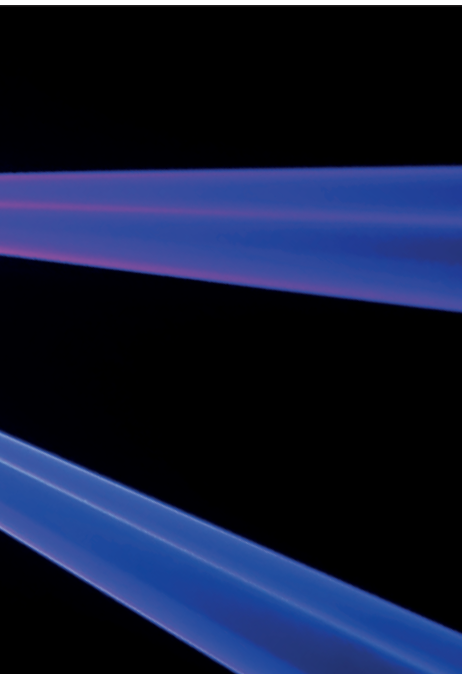

IODA SERIES PROFESSIONAL SHOW LASERS


With high-speed 30 Kpps galvo scanners @ 8° ILDA and up to 1,000 mW output power, the Ioda Series laser lights ensure exciting effects in professional lighting applications. They sport an ILDA interface for computer control, DMX connectivity, a built-in microphone with adjustable sensitivity for sound control and master, slave and standalone operation modes. Including 128 pre-programmed patterns, the Ioda laser systems' analog modulation generates up to 16 million color hues and pin-sharp high visibility graphics projection. The compact aluminium enclosure is dust proof to provide maximum protection of the diode and DPSS laser sources while minimizing maintenance. It features Neutrik powerCON mains inputs and outputs and a key switch to prevent unauthorized use. For audience safety, the Ioda laser lights are equipped with a "Scan Fail Safety" system.

Product number:	CLLIODA400RGY	CLLIODA1000RGB	CLLIODA600RGB
Total power:	400 mW	1,000 mW	600 mW
Colour spectrum:	RGY	RGB	RGB
Wavelength(s):	637 nm, 532 nm	638 nm, 532 nm, 447 nm	637 nm, 532 nm, 447 nm
Beam data:	Approx. 3 mm / 1.3 mrad divergence	Approx. 3 mm / 1.5 mrad divergence	Approx. 3 mm / 1.3 mrad divergence
Laser sources:	Laser diode & DPSS	Laser diode & DPSS	Laser diode & DPSS
Laser class:	3B	4	4
Scanner:	High-performance galvoscaner, 30 kpps @ 8 degrees ILDA	High-performance galvoscaner, 30 kpps @ 8 degrees ILDA	High-performance galvoscaner, 30 kpps @ 8 degrees ILDA
Max. scan angle:	60 degrees	60 degrees	60 degrees
Operating modes:	ILDA, DMX-512, auto, sound control	ILDA, DMX-512, auto, sound control	ILDA, DMX-512, auto, sound control
DMX input / output:	3-pin XLR male / female	3-pin XLR male / female	3-pin XLR male / female
ILDA input / output:	25-pin Sub-D male / female	25-pin Sub-D male / female	25-pin Sub-D male / female
DMX mode:	4-channel, 11-channel	4-channel, 11-channel	4-channel, 11-channel
Controls:	Mode, enter, value down, value up	Mode, enter, value down, value up	Mode, enter, value down, value up
Power supply:	AC 100-240 V / 50-60 Hz	AC 100-240 V / 50-60 Hz	AC 100-240 V / 50-60 Hz
Power consumption:	75 W	100 W	100 W
Power connector:	Neutrik powerCON	Neutrik powerCON	Neutrik powerCON
Housing material:	Metal	Metal	Metal
Dimensions (W x H x D):	188 x 201 x 210 mm (excluding mounting bracket)	188 x 201 x 210 mm (excluding mounting bracket)	188 x 201 x 210 mm (excluding mounting bracket)



- ▶ Professional show laser with up to 1,000 mW output power
- ▶ High-speed high performance 30 Kpps galvo scanners @ 8 degrees ILDA
- ▶ 128 pattern presets
- ▶ Precision beams with minimum divergence for razor-sharp projections
- ▶ ILDA, DMX and sound control
- ▶ Master, slave and standalone modes
- ▶ Display with 4 function keys for easy manual operation
- ▶ Scan Fail Safety system
- ▶ Neutrik powerCON mains inputs and outputs
- ▶ Rugged aluminium enclosure with key switch




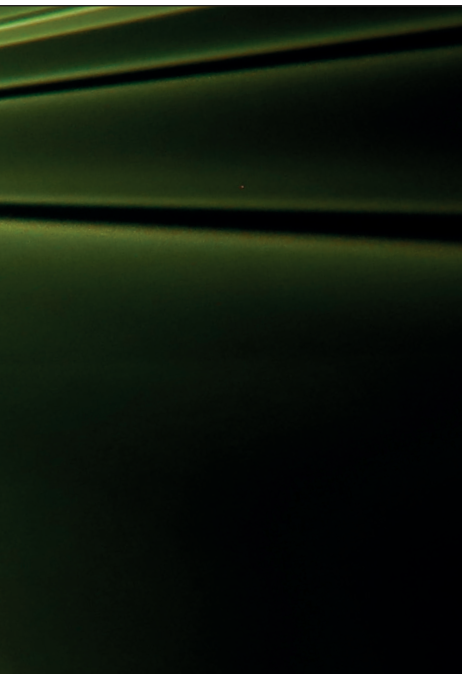

LUKE SERIES PROFESSIONAL SHOW LASER

Featuring up to 1,000 mW output power, high-speed 30 Kpps galvo scanners @ 8° ILDA and an ILDA interface for professional computer control, the Luke Series compact laser lights create lively, stunning show effects. Both RGY and RGB versions allow for DMX and sound control with adjustable microphone sensitivity. In addition, they provide master, slave and standalone modes. The Luke Series' rugged aluminium enclosures sport Neutrik powerCON mains inputs and outputs and a key switch to prevent unauthorized use. For audience safety the loda laser lights are equipped with a "Scan Fail Safety" system.


Product number:	CLLLUKE700RGB	CLLLUKE1000RGB
Total power:	700 mW	1,000 mW
Colour spectrum:	RGB	RGB
Wavelength(s):	650 nm, 532 nm, 447 nm	638 nm, 532 nm, 447 nm
Beam data:	Approx. 3 mm / 2 mrad divergence	Approx. 3 mm / 1.5 mrad divergence
Laser sources:	Laser diode & DPSS	Laser diode & DPSS
Laser class:	4	4
Scanner:	High-performance galvoscaner, 30 kpps @ 8 degrees ILDA	High-performance galvoscaner, 30 kpps @ 8 degrees ILDA
Max. scan angle:	60 degrees	60 degrees
Operating modes:	ILDA, DMX-512, auto, sound control	ILDA, DMX-512, auto, sound control
DMX input / output:	3-pin XLR male / female	3-pin XLR male / female
ILDA input / output:	25-pin Sub-D male / female	25-pin Sub-D male / female
DMX mode:	4-channel, 11-channel	4-channel, 11-channel
Controls:	Mode, enter, value down, value up	Mode, enter, value down, value up
Display elements:	LC display	LC display
Power supply:	AC 100-240 V / 50-60 Hz	AC 100-240 V / 50-60 Hz
Power consumption:	75 W	100 W
Power connector:	Neutrik powerCON	Neutrik powerCON
Housing material:	Metal	Metal
Dimensions (W x H x D):	215 x 157 x 225 mm (excluding mounting bracket)	215 x 157 x 225 mm (excluding mounting bracket)


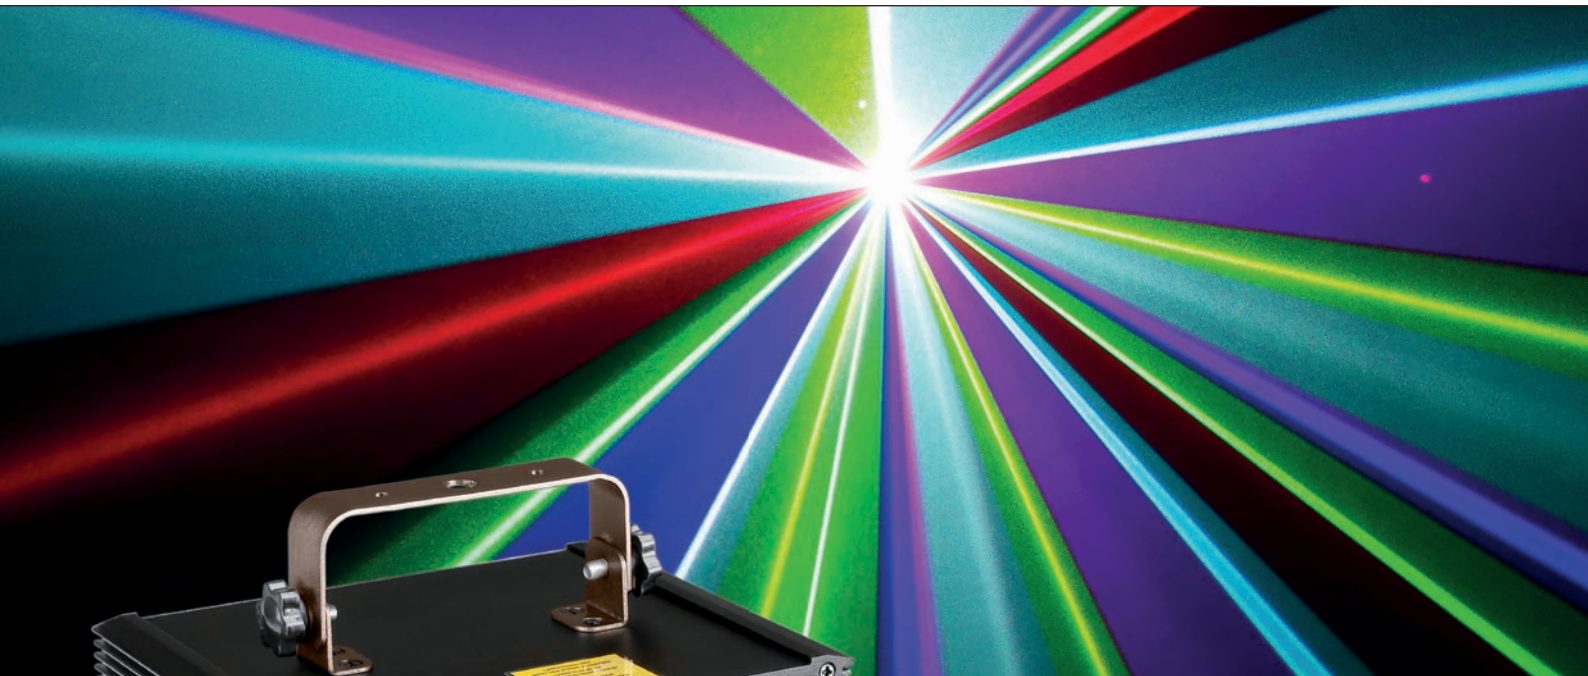


- ▶ 1 x 8 W RGBW and 1 x 8 W RGBA high-power LEDs
- ▶ Low power consumption
- ▶ Power in / out for daisy chaining
- ▶ Operated via DMX, in master / slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED display
- ▶ Rugged metal housing
- ▶ Universal mounting bracket included



Available versions:



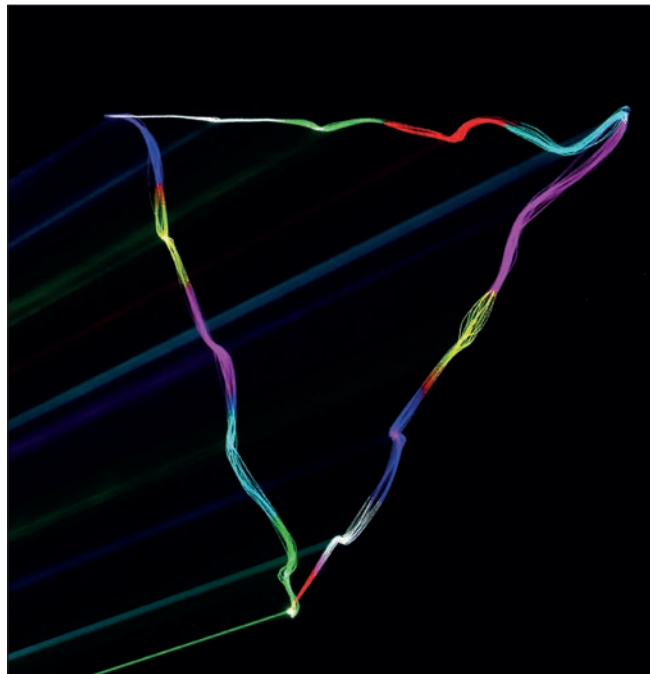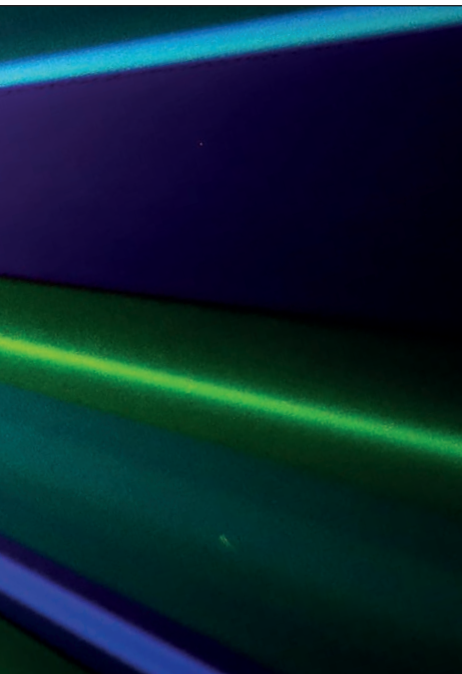

WOOKIE SERIES ANIMATION LASERS


For exciting animations with high visibility, the Wookiee Series laser lights sport up to 600 mW output power, high-speed 5 Kpps stepper motors and 32 pre-programmed patterns. They allow for DMX control in 3-channel and 9-channel modes, sound control via built-in microphones with adjustable sensitivity as well as master, slave and standalone operation. The Wookiee animation laser lights feature a rugged, compact metal enclosure with a bright display and four function keys providing manual setting, a key switch to prevent unauthorized use and a mounting bracket. All models include a convenient infrared remote control unit.

Product number:	CLLWOOKIE150G	CLLWOOKIE200R	CLLWOOKIE200RGY	CLLWOOKIE400RGB	CLLWOOKIE600B
Total power:	150 mW	200 mW	200 mW	400 mW	600 mW
Colour spectrum:	Green	Red	RGY	RGB	Blue
Wavelength(s):	532 nm	650 nm	650 nm, 532 nm	650 nm, 532 nm, 447 nm	447 nm
Beam data:	Approx. 3 mm / 1 mrad divergence	Approx. 3 mm / 1 mrad divergence	Approx. 3 mm / 1 mrad divergence	Approx. 3 mm / 2 mrad divergence	Approx. 3 mm / 2 mrad divergence
Laser sources:	DPSS	Laser diode	Laser diode, DPSS	Laser diode, DPSS	Laser diode
Laser class:	3B	3B	3B	3B	4
Scanner:	High-speed stepper motors, 5 kpps	High-speed stepper motors, 5 kpps	High-speed stepper motors, 5 kpps	High-speed stepper motors, 5 kpps	High-speed stepper motors, 5 kpps
Max. scan angle:	60 degrees	60 degrees	60 degrees	60 degrees	60 degrees
Operating modes:	DMX-512, auto, sound control	DMX-512, auto, sound control	DMX-512, auto, sound control	DMX-512, auto, sound control	DMX-512, auto, sound control
DMX input / output:	3-pin XLR male / female	3-pin XLR3 male / female	3-pin XLR male / female	3-pin XLR male / female	3-pin XLR male / female
DMX mode:	3-channel, 9-channel	3-channel, 9-channel	3-channel, 9-channel	3-channel, 9-channel	3-channel, 9-channel
Controls:	Mode, enter, value down, value up	Mode, enter, value down, value up	Mode, enter, value down, value up	Mode, enter, value down, value up	Mode, enter, value down, value up
Display elements:	LED display	LED display	LED display	LED display	LED display
Power supply:	AC 100-240 V / 50-60 Hz	AC 100-240 V / 50-60 Hz	AC 100-240 V / 50-60 Hz	AC 100-240 V / 50-60 Hz	AC 100-240 V / 50-60 Hz
Power consumption:	50 W	50 W	50 W	50 W	50 W
Power connector:	IEC power socket male	IEC power socket male	IEC power socket male	IEC power socket male	IEC power socket male
Housing material:	Metal	Metal	Metal	Metal	Metal
Housing colour:	Black	Black	Black	Black	Black
Dimensions (W x H x D):	180 x 90 x 192 mm (excl. mntg. bracket)	180 x 90 x 192 mm (excl. mntg. bracket)	180 x 90 x 192 mm (excl. mntg. bracket)	180 x 90 x 192 mm (excl. mntg. bracket)	180 x 90 x 192 mm (excl. mntg. bracket)



- ▶ Strobe, blinder and wash light all in one
- ▶ 648 RGB SMD LEDs
- ▶ 1 to 30 flashes/sec adjustable
- ▶ DMX, sound and manual control
- ▶ Master, slave and standalone operation
- ▶ Rugged metal housing with universal mounting bracket



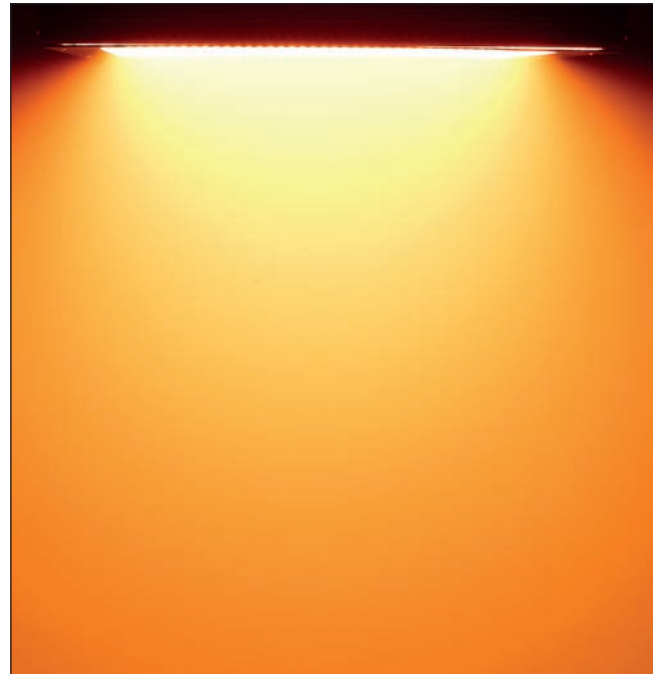

THUNDER WASH 600 RGB

3-IN-1 STROBE, BLINDER AND WASH LIGHT

648 X 0.2 W RGB



The Thunder Wash 600 RGB is a strobe, blinder and wash light all-in-one. It is equipped with 648 RGB 0.2 W SMD LEDs, with an 80° beam angle and features a compact black metal housing with universal mounting bracket. The Thunder Wash 600 RGB comes with 3-pin XLR sockets for DMX input and output, eight DMX modes with dimmer, flash frequency and duration as well as the ability to operate as a master, slave, or standalone. An easy-to-read LED display with buttons for mode, enter, up, and down is used for manual operation, while the built-in microphone is used for sound control.

Product number:	CLTW600RGB
Product type:	Strobe
Type:	LED strobe
Colour spectrum:	RGB
Number of LEDs:	648
LED type:	0.2 W
Dispersion:	80°
Refresh rate:	1 - 30 Hz
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	6-channel, 4-channel, 3-channel 3, 3-channel 2, 3-channel 1, 2-channel, 1-channel
DMX functions:	Dimmer, flash rate, flash duration
Standalone modes:	Sound control, dimmer mode, flash rate, slave mode
Controls:	Mode, value down, value up
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	30 W
Power connector:	IEC power connector male
Housing material:	Metal
Cabinet colour:	Black
Dimensions (W x H x D):	335 x 93 x 182 mm (excluding mounting bracket)



- ▶ Strobe, blinder and wash light all in one
- ▶ 648 white SMD LEDs
- ▶ 1 to 30 flashes/sec adjustable
- ▶ DMX, sound and manual control
- ▶ Master, slave and standalone operation
- ▶ Rugged metal housing with universal mounting bracket



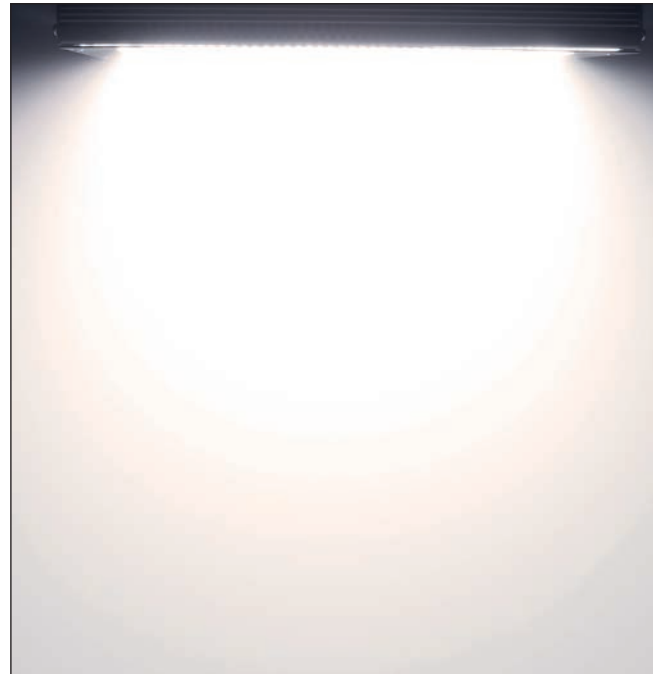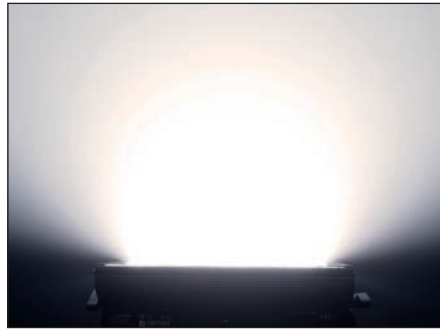

THUNDER WASH 600 W 3-IN-1 STROBE, BLINDER AND WASH LIGHT 648 X 0.2 W WHITE


The Thunder Wash 600 W is a strobe, blinder and wash light all-in-one. It is equipped with 648 white 0.2 W SMD LEDs, with an 80° beam angle and features a compact black metal housing with universal mounting bracket. The Thunder Wash 600 W comes with 3-pin XLR sockets for DMX input and output, five DMX modes with dimmer, flash frequency and duration as well as the ability to operate as a master, slave, or standalone. An easy-to-read LED display with buttons for mode, enter, up, and down is used for manual operation, while the built-in microphone is used for sound control.

Product number:	CLTW600W
Product type:	Strobe
Type:	LED strobe
Colour spectrum:	White
Number of LEDs:	648
LED type:	0.2 W
Dispersion:	80°
Refresh rate:	1 - 30 Hz
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	7-channel, 2-channel, 1-channel, 3-channel 1, 5-channel
DMX functions:	Flash rate, flash duration, dimmer
Standalone modes:	Dimmer mode, flash rate, slave mode, sound control
Controls:	Mode, value down, value up
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	30 W
Power connector:	IEC power connector male
Housing material:	Metal
Cabinet colour:	Black
Dimensions (W x H x D):	335 x 93 x 182 mm (excluding mounting bracket)



- ▶ Strobe, blinder and wash light all in one
- ▶ 132 RGB SMD LEDs
- ▶ 1 to 30 flashes/sec adjustable
- ▶ DMX, sound and manual control
- ▶ Master, slave and standalone operation
- ▶ Rugged metal housing with universal mounting bracket
- ▶ Low power consumption



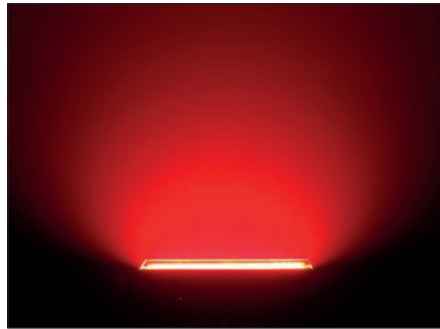

THUNDER WASH 100 RGB 3-IN-1 STROBE, BLINDER AND WASH LIGHT 132 X 0.2 W RGB

The Thunder Wash 100 RGB is a strobe, blinder and wash light all-in-one. It is equipped with 132 RGB 0.2 W SMD LEDs, with an 80° beam angle and features a compact black metal housing with universal mounting bracket. The Thunder Wash 100 RGB comes with 3-pin XLR sockets for DMX input and output, eight DMX modes with dimmer, flash frequency and duration as well as the ability to operate as a master, slave, or standalone. An easy-to-read LED display with buttons for mode, enter, up, and down is used for manual operation, while the built-in microphone is used for sound control.

Product number:	CLTW100RGB
Product type:	Strobe
Type:	LED strobe
Colour spectrum:	RGB
Number of LEDs:	132
LED type:	0.2 W
Dispersion:	80°
Refresh rate:	1 - 30 Hz
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	1-channel, 3-channel 2, 3-channel 3, 3-channel 1, 2-channel 2, 2-channel 1, 6-channel, 4-channel
DMX functions:	Flash rate, flash duration, dimmer
Standalone modes:	Dimmer mode, flash duration, sound control, slave mode
Controls:	Mode, value up, value down
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	30 W
Power connector:	IEC power connector male
Housing material:	Metal
Cabinet colour:	Black
Dimensions (W x H x D):	310 x 70 x 70 mm (excluding mounting bracket)



- ▶ Strobe, blinder and wash light all in one
- ▶ 132 white SMD LEDs
- ▶ 1 to 30 flashes/sec adjustable
- ▶ DMX, Sound- and manual control
- ▶ master, slave and standalone operation
- ▶ Rugged metal housing with universal mounting bracket
- ▶ Low power consumption



TECHNOLOGY



DMX



STAND ALONE MODE



MASTER/SLAVE



COLD WHITE





STROBE EFFECT



SOUND TO LIGHT



GREEN SOLUTION

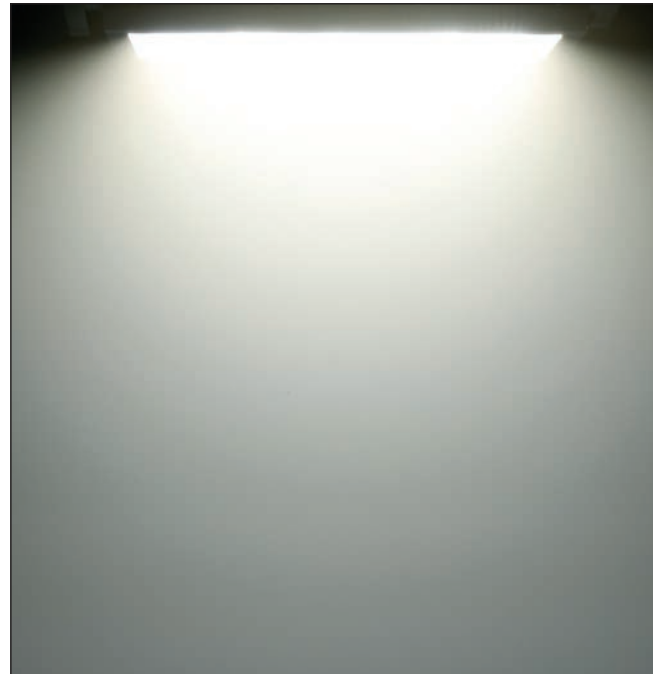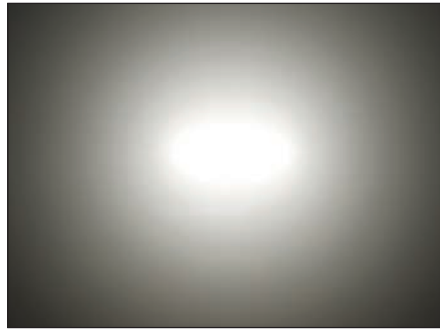

THUNDER WASH 100 W 3-IN-1 STROBE, BLINDER AND WASH LIGHT 132 X 0.2 W WHITE

The Thunder Wash 100 W is a strobe, blinder and wash light all-in-one. It is equipped with 132 white 0.2 W SMD LEDs, with an 80° beam angle and features a compact black metal housing with universal mounting bracket. The Thunder Wash 100 W comes with 3-pin XLR sockets for DMX input and output, 4 DMX modes with dimmer, flash frequency and duration as well as the ability to operate as a master, slave, or standalone. An easy-to-read LED display with buttons for mode, enter, up, and down is used for manual operation, while the built-in microphone is used for sound control.

Product number:	CLTW100W
Product type:	Flash duration
Type:	LED strobe
Colour spectrum:	white
Number of LEDs:	132
LED type:	0.2 W
Dispersion:	80°
Refresh rate:	1 - 30 Hz
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	3-channel 1, 2-channel, 3-channel 2, 1-channel
DMX functions:	Flash rate, dimmer
Standalone modes:	Dimmer mode, flash rate, sound control, slave mode
Controls:	Value own, value up, mode
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	30 W
Power connector:	IEC power connector male
Housing material:	Metal
Cabinet colour:	Black
Dimensions (W x H x D):	310 x 70 x 70 mm (excluding mounting bracket)



- ▶ 3 effects in 1 fixture: strobe, chaser and blinder
- ▶ 25 powerful white 6W LEDs for impressive, ultra bright 9200 lm
- ▶ 1 - 30 Hz adjustable strobe
- ▶ 25-zone chase effect
- ▶ Alphabetic character and numeral mapping
- ▶ 7 modes of DMX control plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ 4-button LED display for easy configuration



TECHNOLOGY



DMX



STAND ALONE MODE



MASTER/SLAVE





GREEN SOLUTION



STROBE EFFECT



SOUND TO LIGHT

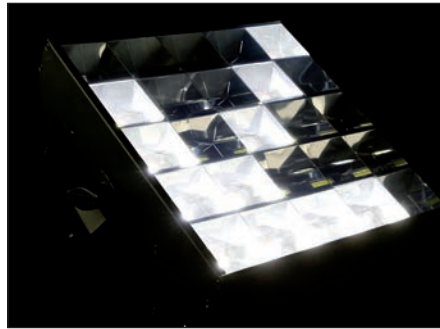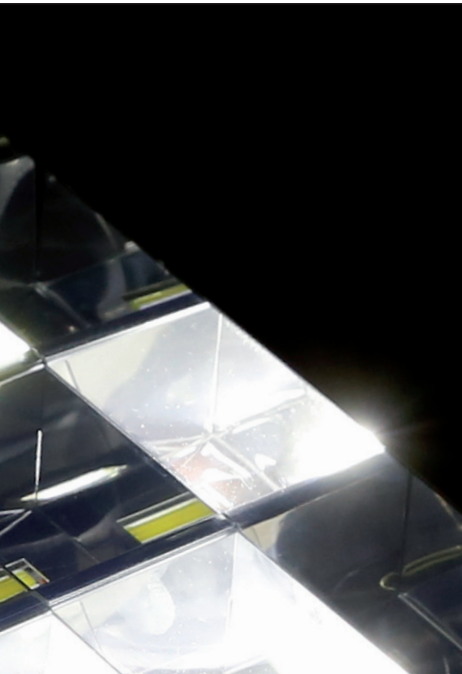


LED FLASH MATRIX 250 STROBE CHASER BLINDER

Equipped with 25 ultra bright 6 watt white COB LEDs in a 5 x 5 arrangement the Cameo Flash Matrix 250 generates stunning strobe, chase and blinder effects. With a 50° beam angle, variable strobe speed from 1 - 30 Hz and alphabetic character and numeral mapping the 3-in-1 fixture is designed to deliver a mesmerizing performance.

The Flash Matrix 250 features 7 modes of DMX control plus standalone, master and slave capability with highly effective built-in auto programs and sound activation. A 4-button LED display enables easy configuration while a temperature controlled fan ensures cool and noiseless operation. The compound metal provides DMX and IEC inputs and outputs for easy daisy chaining and comes with an adjustable mounting bracket.



Product number:	CLMF250
Product Type:	3in1 FX Matrix
Type:	LED Strobe - Chaser - Blinder
LED Colour Spectrum:	Cool white
Number of LEDs:	25
LED Type:	6 W
Beam Angle (Beam):	50°
Beam Angle (Field):	74°
DMX Input:	3-pin XLR male
DMX Output:	3-pin XLR female
DMX Mode:	1-channel, 2-channel, 3-channel, 5-channel, 10-channel, 25-channel, 30-channel
DMX Functions:	Master Dimmer, Dimmer 1-25, Auto programs 1-11, Stroboscope (>30 Hz), flash duration, Music control
Standalone Functions:	Strobe, Auto Programs 1-11, Music Control, Master/Slave mode
Housing Cooling:	Low-noise fan
Dimensions (W x H x D, excluding bracket):	305 x 310 x 105 mm
Weight:	4 kg
Other Features:	Power cable and mounting bracket included

NEW!

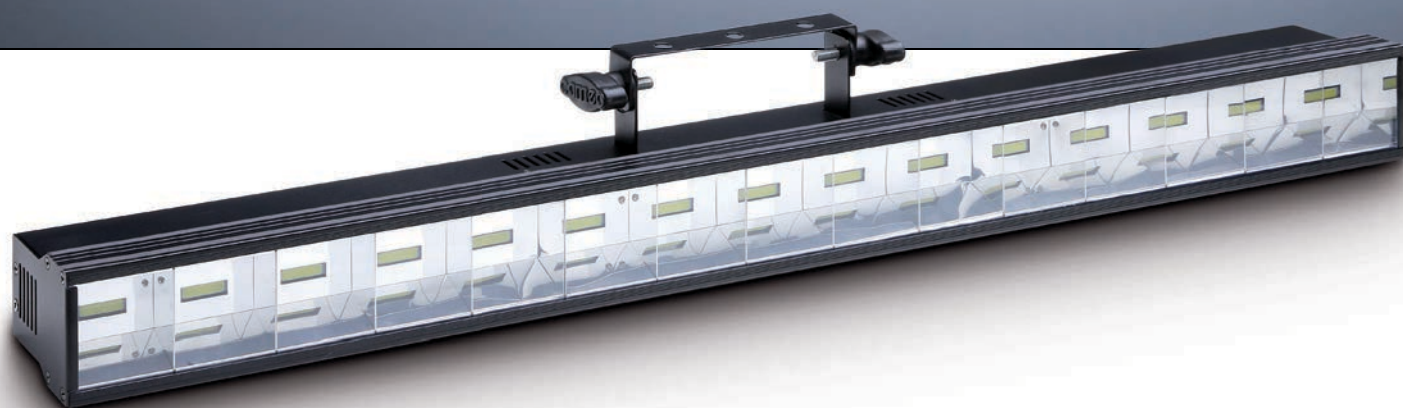

- ▶ 3 FX in 1: strobe, chaser and blinder
- ▶ 15-zone chase effect
- ▶ 15 powerful, ultra bright 6W LEDs
- ▶ 6 modes of DMX control plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ 4-button LED display for easy operation



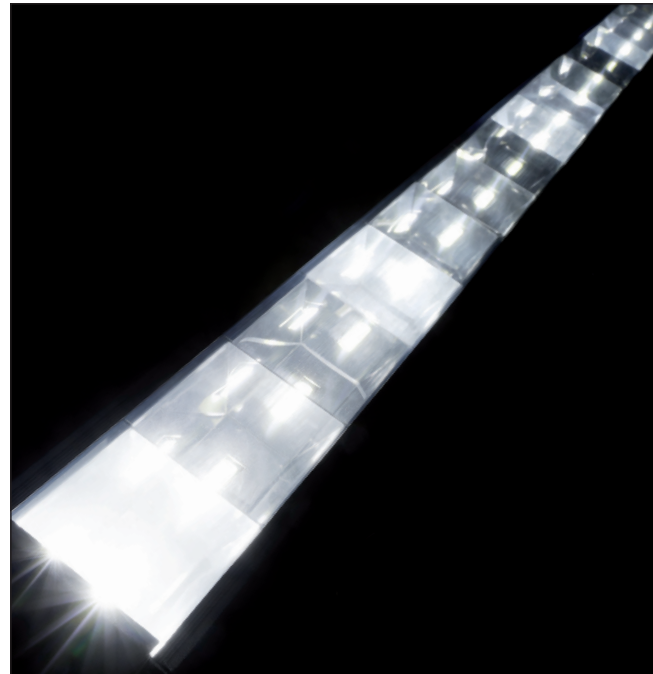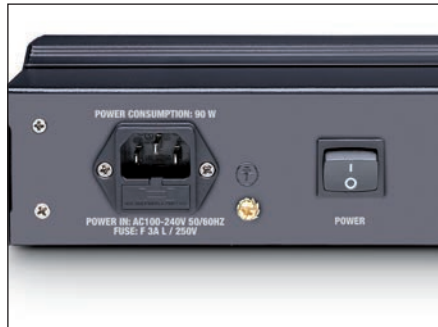


FLASH BAR 150

3-IN-1 STROBE, CHASE AND BLINDER EFFECT FIXTURE


The Cameo Flash Bar 150 combines strobe, chase and blinder effects in a single fixture that is equipped with 15 powerful white 6 watt LEDs. With a maximum strobe speed up to 30 Hz, adjustable flash rate and duration, smooth dimming and 80° dispersion the Flash Bar 150 creates captivating, dynamic lighting. It offers 1-channel, 2-channel, 3-channel, 5-channel, 15-channel and 20-channel modes of DMX control as well as master, slave and standalone functionality. In addition, the Flash Bar 150 features sound activation and mesmerizing automated programs.

Product number:	CLFB150
Product type:	LED Strobes
Type:	Strobe
Colour spectrum:	White
Number of LEDs:	15
LED type:	6 W
Dispersion:	80°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	1-channel, 15-channel, 2-channel, 20-channel, 3-channel, 5-channel
DMX Functions:	Flash duration, flash rate, auto programs, dimmer
High Speed Strobe:	> 30Hz
Standalone modes:	Dimmer Mode, slave mode, Flash rate, sound control
Controls:	Value down, value up, enter, mode
Indicators:	LED Display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	90 W
Power connector:	IEC power connector male
Housing material:	Metal
Cabinet colour:	Black
Cooling:	Low-noise fan
Illuminance:	2,250 lx @ 1m
Width:	906 mm
Height:	73 mm
Depth:	115 mm
Weight:	3.3 kg

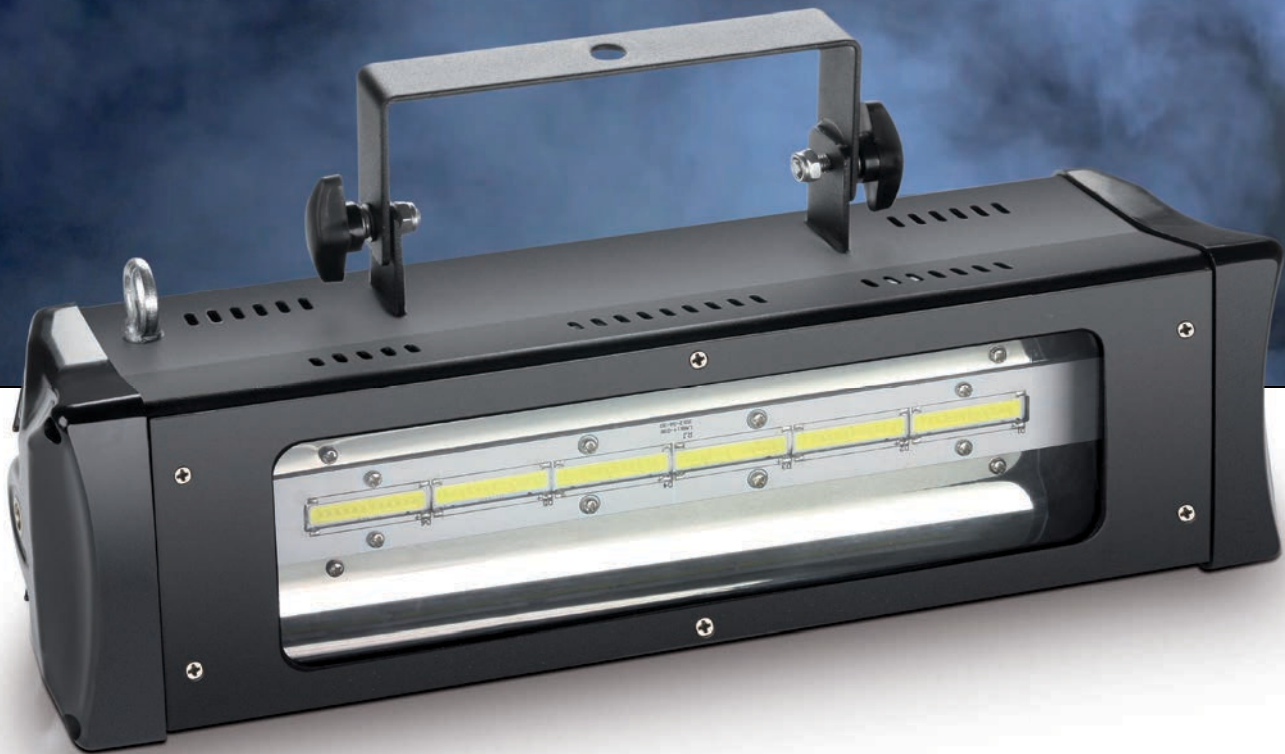

- ▶ Extremely powerful 6 x 10 W White COB LEDs
- ▶ Low power consumption
- ▶ Flash-rate adjustable (1-20 flashes/sec)
- ▶ Wide beam angle
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the three buttons and LED display
- ▶ Universal mounting bracket included
- ▶ Compact, sturdy metal housing



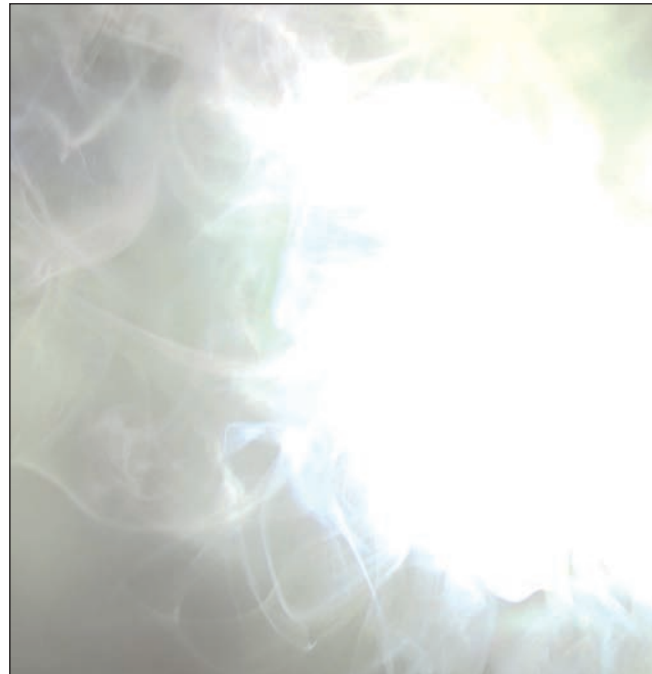

STROBE 2

EXTREMELY POWERFUL STROBE WITH 6 X 10 W WHITE COB LEDs

The Cameo CLSTROBE2 is a high-power LED strobe light with six 10 W white COB LEDs and 80° beam angle for large area coverage. It allows for DMX, slave and standalone operation with strobe, dimmer and sound activation modes. The flash rate is adjustable from 1 to 20 flashes per second for an intense strobe effect. Mode, value up and down keys and a 3-digit LED display permit easy manual control. The compact lightweight CLSTROBE2 is easily portable, and an adjustable bracket provides multiple mounting options.

Product number:	CLSTROBE2
Product type:	Strobe
Type:	LED strobe
Colour range:	White
Number of LEDs:	6
LED type:	10 W white COB
Beam angle:	80°
Flash rate:	1-20 flashes/sec adjustable
DMX input:	XLR 3-pin
DMX output:	XLR 3-pin
DMX mode:	2-channel
DMX functions:	Flash rate, dimmer
Standalone modes:	Flash rate, dimmer, sound mode, slave
Controls:	Mode, value up, value down
Indicators:	3-digit LED display
Connectors:	Analog on- and output 6.3 mm jack
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Housing material:	Metal
Housing colour:	Black
Dimensions (W x H x L):	380 x 95 x 165 mm (excluding mounting bracket)



- ▶ 3-in-1 LED effect
- ▶ 5 x 3 W RGBWA Derby effect
- ▶ 150 mW grating laser (red 100 mW, green 50 mW)
- ▶ 8 x 1 W strobe LEDs
- ▶ 10 DMX Channels, sound and automatic control
- ▶ Master and slave operation
- ▶ Low power consumption
- ▶ Sturdy metal housing
- ▶ Universal mounting bracket included





STORM

5X3W 3IN1 RGBWA DERBY, STROBE AND GRATING LASER LIGHTING EFFECT

The STORM from Cameo combines a Derby effect, laser and strobe in one projector. It can be controlled via 10 DMX channels, automatically or by music and used as master or slave. Razor-sharp laser beams in red and green, up to 30 ultra-bright strobe lights per second and the RGBWA Derby effect combine to ensure an animated lighting design aimed to impress. The STORM features an easy to read display with function buttons and LEDs to show operating modes, a key switch to prevent unauthorised operation, remote shut-down and IEC power input and output. The comfortable adjustable bracket and a locking ring allow for reliable assembly of the projector.


Product number:	CLSTORM
Product type:	LED / laser effect
Type:	3-in-1 LED projector
Colour spectrum Derby effect:	RGBWA
Number of LEDs Derby effect:	5
LED Type Derby effect:	3 W
Dispersion Derby effect:	68°
Colour spectrum laser effect:	Green LED (532 nm), red LED (650 nm)
Number of diodes laser effect:	1 x red, 1x green
Type of diodes laser effect:	Red: 100 mW, green: 50 mW (DPSS laser)
Beam angle laser effect:	74°
Laser class laser effect:	3R
Laser shutdown (safety function):	Remote connection, connection for external emergency stop switch
Colour spectrum strobe:	White
Number of LEDs strobe:	8
LED type strobe:	1 W
Beam angle strobe:	8°
DMX input:	XLR 3-pin male, optional remote switch
DMX output:	XLR 3-pin female


DMX mode:	10-channel
DMX functions:	Derby, auto programmes, sound programmes, laser, strobe
Standalone modes:	Sound programmes, auto programmes
Controls:	Up, down, mode enter
Display:	4-digit LED display
Power connector:	IEC power input and output
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	50 W
Fuse:	T1.6AL / 250 V
Housing material:	Metal
Cabinet colour:	Black
Housing cooling:	Fan
Dimensions (W x H x D):	250 x 250 x 170 mm (excluding mounting bracket)
Other features:	Security lock slot, optional remote switch, adjustable mounting bracket included

NEW!



- ▶ 3-in-1 flat PAR can with grating laser and strobe
- ▶ PAR can with 6 x 9W RGB LEDs and single pixel control
- ▶ Class 3R grating laser with red 100 mW and green 30 mW diodes
- ▶ Strobe with 24 white 0.5 W LEDs
- ▶ Each effect individually usable
- ▶ 4 DMX modes, sound activation and automated programs
- ▶ Master, slave and standalone operation
- ▶ Compound housing with low-noise fan and safety eye
- ▶ Infrared remote and adjustable mounting bracket included

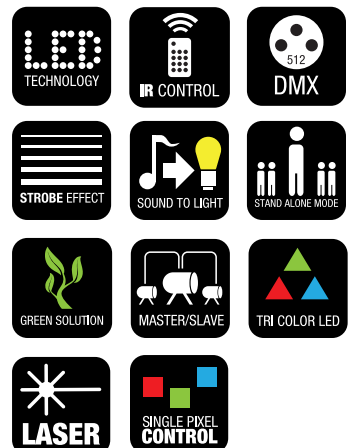

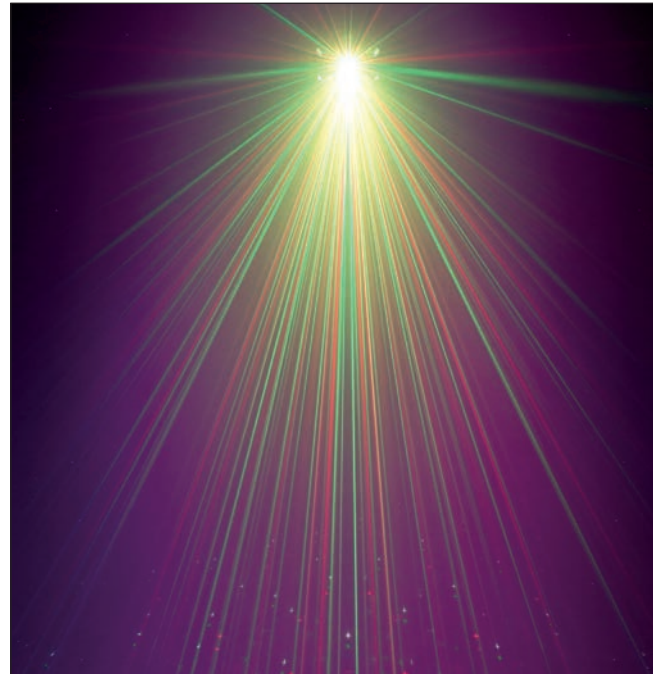

FLAT STORM 3-IN-1 FLAT PAR CAN WITH GRATING LASER AND STROBE

Combining impressive grating laser and intense strobe effects with a colorful PAR light, the low-profile Flat Storm is just right where space comes at a premium. The versatile fixture sports six long-life 9 watt RGB LEDs for rich color mixing, a total of 24 cool white 0.5 W LEDs to fire the high-speed strobe while the Class 3R grating laser utilizes red 100 mW and green 30 mW diodes. For extra flexibility, the Flat Storm includes effective single pixel control and the option to use the PAR can, strobe and laser functions individually.


Product number:	CLFLATSTORM
Product type:	LED Lighting Effects
Type:	LED / Strobe / Laser Effects, Laser
Colour Spectrum Laser Effect:	Green LED (532 nm), red LED (650 nm)
Number of Diodes Laser Effect:	1 x red, 1 x green
Type of Diodes Laser Effect:	red 100 mW, green 30 mW
Laser Class Laser Effect:	3R
Colour Spectrum Strobe:	CW
Number of LEDs Strobe:	24
LED Type Strobe:	0.5 W
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	5-channel, 9-channel, 3-channel, 30-channel
DMX Functions:	Master dimmer, rotate laser, single RGB LED's, sound control, strobe, auto programm speed, colour macro, strobe speed laser, laser, auto programs
Standalone modes:	Auto programs, static, sound programs, master / slave mode
Controls:	Down, mode, enter, up
Indicators:	4 x 7 segment LED display
Power connector:	IEC power input and output
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	50 W
Fuse:	T1.0A
Housing material:	ABS plastic
Cabinet colour:	Black
Housing Cooling:	Fan
Width:	207 mm
Height:	207 mm
Depth:	78 mm
Weight:	1.3 kg
Other features:	IR Remote, adjustable mounting bracket included, Key, Remote connection

NEW!



- ▶ 3 FX in 1: grating laser, strobe, chaser and derby effect
- ▶ Laser with red 100mW / 650nm and green 30mW / 532nm diodes
- ▶ Strobe with 12 ultra-bright white 0.5 W LEDs
- ▶ RGBWA derby effect with 9 W RGB and 9 W BWA LEDs
- ▶ 2 DMX modes, sound activation and automated programs
- ▶ Master, slave and standalone operation
- ▶ Each effect individually usable
- ▶ Low-noise fan
- ▶ Safety eye and adjustable mounting bracket
- ▶ Infrared remote control included



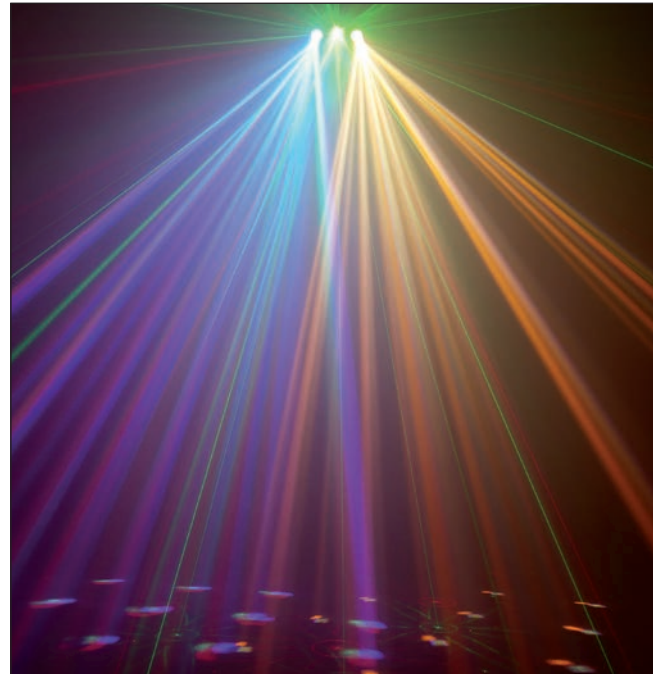

STORM FX

3-IN-1 LIGHTING EFFECT WITH GRATING LASER, STROBE AND DERBY EFFECT INCL. IR-REMOTE

The STORM FX by Cameo combines a Class 3R grating laser, strobe and derby effect in a single fixture. It features 2-channel and 12-channel modes of DMX control, sound activation, automated programs and can be used as master, slave or standalone. With razor-sharp red and green laser beams, 12 white strobe LEDs for ultra bright high-speed flashes and the colourful RGBWA derby effect the STORM FX generates impressive animated lighting.

Product number:	CLSTORMFX
Product type:	LED Lighting Effects
Type:	LED / Laser / Effects
Colour Spectrum Derby Effect:	RGBWA (9W RGB + 9W BWA)
Number of LEDs Derby Effect:	6
LED Type Derby Effect:	3 W
Colour Spectrum Laser Effect:	Red LED (650 nm), green LED (532 nm)
Number of Diodes Laser Effect:	1 x red, 1 x green
Type of Diodes Laser Effect:	Red 100 mW, green 50 mW (DPSS laser)
Laser Class Laser Effect:	3R
Laser Shutdown (safety function):	Lock switch, connection for external emergency stop switch
Colour Spectrum Strobe:	White
Number of LEDs Strobe:	12
LED Type Strobe:	0.5 W
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	2-channel, 12-channel
DMX Functions:	Strobe, sound programs, laser, derby, auto programs
Standalone modes:	Sound programs, auto programs
Controls:	Up, down, IR Remote, Enter, mode
Indicators:	4-digit LED display
Power connector:	IEC power input and output
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Housing material:	Metal
Cabinet colour:	Black
Housing Cooling:	Fan
Width:	290 mm
Height:	110 mm
Depth:	200 mm
Weight:	2.6 kg
Other features:	Adjustable mounting bracket included, Optional Remote Switch, short-circuit connector for remote connection included, IR Remote, security lock slot



- ▶ 1 x 32 W RGBW 4-in-1 high-power LED
- ▶ Low-power consumption
- ▶ Power in/out for daisy chaining
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED display
- ▶ Rugged metal housing
- ▶ Universal mounting bracket included





MOONFLOWER HP

32W 4-IN-1 RGBW HIGH-POWER LED EFFECT

The Cameo MOONFLOWER HP produces over 150 sharp, closely focused light beams for a stunning and space-filling lighting effect. A particularly powerful and durable 32 W quad LED provides natural RGBW colours with high intensity. The convection-cooled device works almost noiselessly, and the usage time is virtually unlimited thanks to extremely low heat generation. The MOONFLOWER HP can be operated in 2- or 5-channel DMX mode with features such as dimmer, strobe and rotation effects or as master, slave and standalone. To this end, automated programmes and a microphone for sound control are integrated; the operation is simple and convenient via four buttons and a bright LED display. The sturdy black metal housing with an adjustable universal mounting bracket is equipped with 3-pin XLR connectors for input and looping of the DMX signal; IEC input and output sockets allow for parallel power supply of daisy chained devices. The Cameo MOONFLOWER HP is characterised by a low power consumption and works with all mains voltages from 100 to 240 V.

Product number:	CLFLOWERHP
Product type:	LED effect light
Type:	Moonflower
Colour range:	RGBW
Number of LEDs:	1
LED type:	32W 4-in-1
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	2-channel, 5-channel
DMX functions:	Strobing slow & fast, colour selection, no rotation, clockwise fast & slow, counter clockwise fast & slow, dimmer
Standalone modes:	Auto run, sound control
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	40 W
Power connector:	IEC power connector male, IEC power connector female
Housing material:	Metal
Housing colour:	Black
Cooling:	Convection
Dimensions (W x H x D):	250 x 240 x 177 mm (excluding mounting bracket)

NEW!



- ▶ 9 W Ultra High Power TRI RGB LED
- ▶ Low power consumption
- ▶ Power in/out for daisy chaining
- ▶ Operated via DMX, in master / slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED display
- ▶ Universal mounting bracket included
- ▶ Sturdy metal housing





MOONFLOWER

9 W TRI COLOUR LED LIGHTING EFFECT


An LED effect that makes a huge impression! Featuring a 9-Watt TRI colour LED as the light source and six lenses, the CLMOVER1 creates razor-sharp light beams that tear through the room. Colourful, fast and bright and always playing to the right beat thanks to the integral microphone and sound control function. They are actuated either via DMX protocol (3-pole XLR) with four control channels, in master/slave mode or in standalone mode via the sound control. The CLMOVER1 is quick and easy to operate using the four push buttons and an LED display. Its power consumption is a mere 30 Watts.

Product number:	CLMOVER1
Product type:	LED Lighting Effects
Type:	LED Effect Lights
Colour spectrum:	RGB
Number of LEDs:	1
LED type:	9 W TRI Colour
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	4-channel
DMX Functions:	Strobing fast & slow, clockwise fast & slow, colour selection, dimmer, counter clockwise fast & slow, no rotation
Standalone modes:	Sound control, Auto run
Controls:	Value Up, mode, Enter, Value Down
Indicators:	LED Display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	30 W
Power connector:	IEC power connector male, IEC power connector female
Housing material:	Metal
Cabinet colour:	Black
Cooling:	Convection
Width:	250 mm
Height:	240 mm
Depth:	177 mm
Weight:	4 kg
Features:	6 lenses for razor-sharp light beams



- ▶ 5 x 10 W RGBWA high-power LEDs
- ▶ Low power consumption
- ▶ Power in / out for daisy chaining
- ▶ Operated via DMX, in master / slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED display
- ▶ Rugged metal housing
- ▶ Universal mounting bracket included



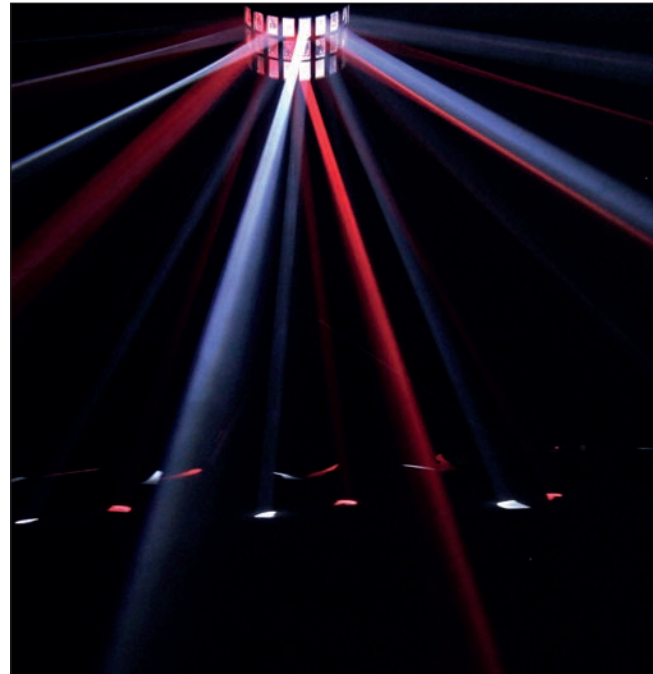

SUPERFLY HP

5 X 10W RGBWA HIGH-POWER LED EFFECT

The Cameo SUPERFLY HP features five durable, 10 W LEDs in the colours red, green, blue, white and amber and 24 precision lenses for an impressive Derby effect. About 40 razor-sharp edged, wide beams cut through the room with intense colours and high luminosity. Thanks to efficient convection cooling, the device operates almost noiselessly, and the minimal heat generation allows for unrestricted operating times. The SUPERFLY HP can be controlled via DMX in 2- or 5-channel mode, and features functions such as rotation, strobe and dimmer to support a vibrant, dynamic lighting design. The unit is also equipped with automated programmes, and a microphone for music control and is suitable for use as master, slave or standalone. Four buttons and a bright LED display are used for comfortable operation. The sturdy black metal housing of the SUPERFLY HP has an adjustable universal mounting bracket and a locking ring. Three-pin XLR connectors as DMX input and output as well as IEC-power input and output jacks allow for easy daisy chaining of devices.

Product number:	CLSUPERFLYHP
Product type:	LED effect light
Type:	Derby
Colour range:	RGBWA
Number of LEDs:	5
LED type:	10 W RGBWA
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	2-channel, 5-channel
DMX functions:	Strobing fast & slow, colour selection, no rotation, clockwise fast & slow, counter clockwise fast & slow, dimmer
Standalone modes:	Auto run, sound control
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	50 W
Power connector:	IEC power connector male, IEC power connector female
Housing material:	Metal
Housing colour:	Black
Cooling:	Convection
Dimensions (W x H x D):	360 x 225 x 300 mm (excluding mounting bracket)

NEW!



- ▶ 2 FX in 1: derby effect and strobe
- ▶ RGBW flower effect with four 3 W LEDs
- ▶ Strobe with 16 ultra-bright white 0.5 W LEDs
- ▶ 2 DMX modes, sound activation and automated programs
- ▶ Master, slave and standalone operation
- ▶ Each effect individually usable
- ▶ Low-noise fan
- ▶ Safety eye and adjustable mounting bracket
- ▶ Infrared remote control included






SUPERFLY XS

2-IN-1 DERBY EFFECT AND STROBE INCL. IR-REMOTE

With four long-life 3 watt RGBW LEDs and 48 precision lenses the SUPERFLY XS creates a vivid derby effect of wide, sharp-edged rays of light that cut through with intensive, ultra bright colours. The integrated strobe sports 16 white 0.5 W LEDs. Both effects can be used individually. The SUPERFLY XS features 1-channel and 5-channel DMX modes, sound activation and automated programs plus master, slave and standalone functionality. Operation is intuitive via the 4-button display and LED mode indicators.


Product number:	CLSUPERFLYXS
Product type:	LED Lighting Effects
Type:	LED / Strobe / Effects
Colour Spectrum Derby Effect:	RGBW
Number of LEDs Derby Effect:	4
LED Type Derby Effect:	3 W
Colour Spectrum Strobe:	White
Number of LEDs Strobe:	16
LED Type Strobe:	0.5 W
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	1-channel, 5-channel
DMX Functions:	Sound programs, strobe, auto programs, derby
Standalone modes:	Auto programs, sound programs
Controls:	Enter, down, mode, up
Indicators:	4-digit LED display
Power connector:	IEC power input and output
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Housing material:	Metal
Cabinet colour:	Black
Housing Cooling:	Fan
Width:	202 mm
Height:	168 mm
Depth:	142 mm
Weight:	1.6 kg
Other features:	Security lock slot, IR Remote, adjustable mounting bracket included

NEW!

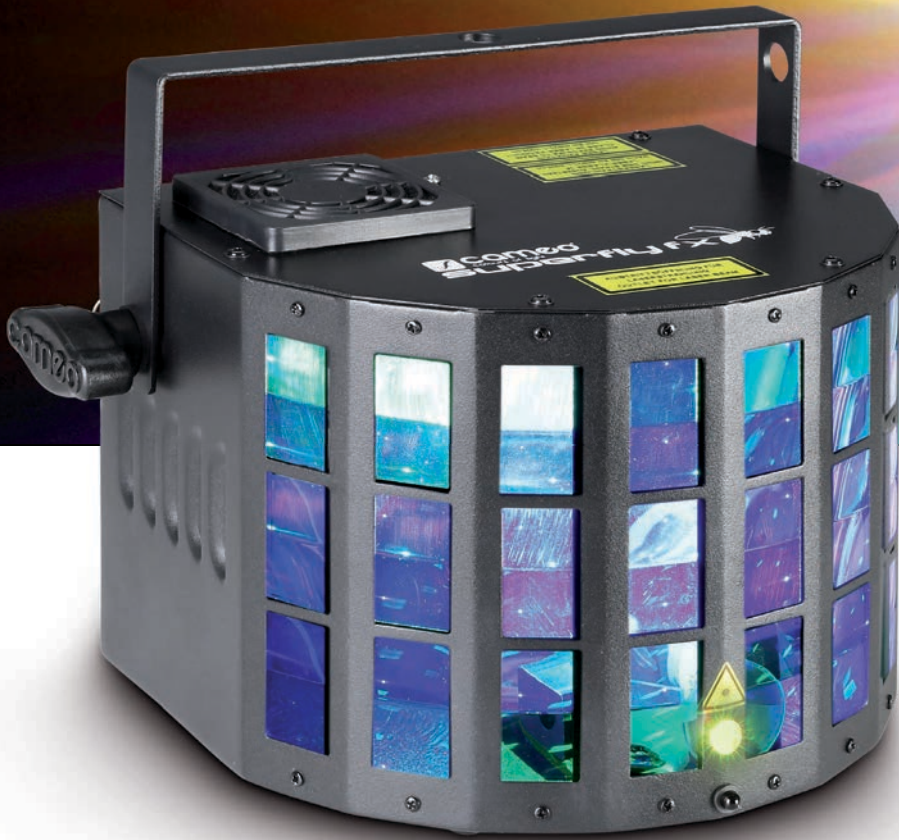

- ▶ 2 FX in one: derby effect and grating laser
- ▶ RGBW derby effect with four 3 W LEDs
- ▶ 100mW red and 30mW green class 3R grating laser
- ▶ Each effect individually usable
- ▶ 2 DMX modes, sound activation and auto run programs
- ▶ Master, slave and standalone operation
- ▶ Interlock connector and key switch
- ▶ Low-noise fan
- ▶ Safety eye and adjustable mounting bracket
- ▶ Infrared remote control included



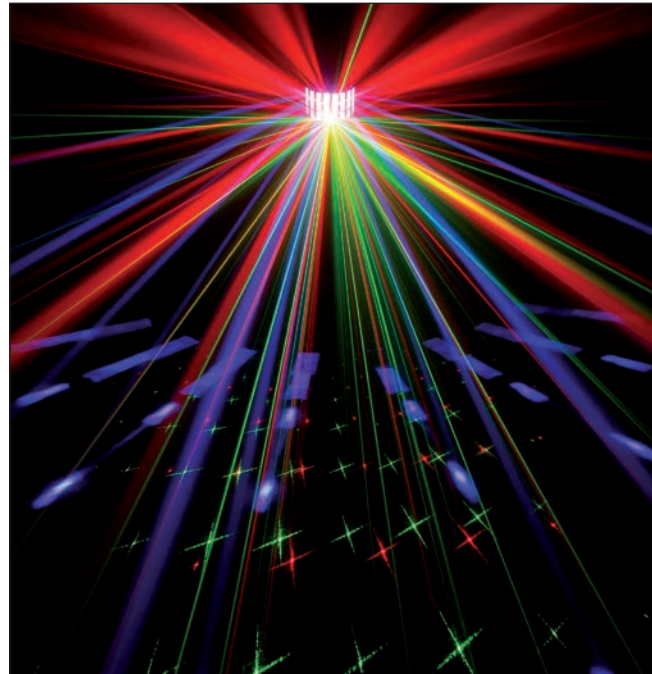

SUPERFLY FX

2-IN-1 LED DERBY EFFECT WITH GRATING LASER

The Superfly FX is a dual effect light combining four 3 watt LEDs for colorful RGBW derby effects and a class 3R grating laser with 100 mW red and 30 mW green sources. Both effects can be used together or individually with DMX control, sound activation or built-in auto run programs. The fixture features a 4-button, 4-segment display for intuitive configuration, master, slave and standalone capability plus 2-channel and 8-channel DMX modes. The Superfly FX comes with a convenient handheld for infrared remote control.

Product number:	CLSUPERFLYFX
Product type:	LED Lighting Effects
Type:	LED Effect Lights
Colour spectrum:	RGBW
Number of LEDs:	4
Number of Diodes Laser Effect:	1 x green, 1 x red
Type of Diodes Laser Effect:	red 100 mW, green 50 mW (DPSS laser)
Laser Class Laser Effect:	3R
Laser Shutdown (safety function):	Remote connection, Lock switch
LED type:	3 W
Colour Spectrum Laser Effect:	green LED (532 nm), red LED (650 nm)
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	8-channel, 2-channel
DMX Functions:	Derby, Derby program, Derby Motor, Stroboscope, Laser, Laser program, Laser Motor
Cooling:	fan
Width:	220mm
Height:	140mm
Depth:	169mm
Weight:	1.6kg
Features:	rubber feet, short-circuit connector for remote connection included, IR Remote, Optional Remote Switch, security lock slot, adjustable mounting bracket included

NEW!



- ▶ 3-in-1 LED Hybrid Effect Light
- ▶ Derby effect with 2 x 9W RGB LEDs
- ▶ Moonflower effect with 64 x 5mm LEDs (16 red, green, blue, white respectively)
- ▶ Strobe effect with 36 x 5mm LEDs
- ▶ Individual DMX, automated or sound control of each effect
- ▶ 3 DMX modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation





SERUM 3-IN-1 DERBY, MOONFLOWER AND STROBE EFFECT LIGHT

The Cameo Serum is a 3-in-1 LED fixture combining derby, moonflower and strobe effects for amazing illumination. It features 2-channel, 4-channel and 7-channel modes of DMX control, automated and sound activated programs plus master, slave and standalone capabilities. The dazzling derby effect is generated by two 9 watt RGB LEDs, a massive total of 64 LEDs with 5 mm diameter (16 red, green, blue, white respectively) creates colourful moonflower lighting, and the 0 – 20 Hz strobe utilizes 36 white 5 mm LEDs. Each effect is individually controllable in all modes of operation.

Product number:	CLSERUM
Product type:	LED Lighting Effects
Type:	LED / Strobe / Effects
Colour Spectrum Derby Effect:	RGB
Number of LEDs Derby Effect:	6
LED Type Derby Effect:	3 W
Colour Spectrum Strobe:	White
Number of LEDs Strobe:	36
LED Type Strobe:	5 mm
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	7-channel, 4-channel, 2-channel
DMX Functions:	Strobe, sound programs, Flower, auto programs, Derby
Standalone modes:	Auto programs, sound programs
Controls:	Up, mode, down, Enter
Indicators:	4-digit LED display
Power connector:	IEC power input and output
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	75 W
Housing material:	Metal
Cabinet colour:	Black
Housing Cooling:	Convection
Width:	245 mm
Height:	240 mm
Depth:	240 mm
Weight:	3.205 kg
Other features:	Security lock slot, adjustable mounting bracket included

NEW!



- ▶ 2-in-1 LED Hybrid Effect Light
- ▶ Derby effect with 20 x 3W RGBA LEDs and single pixel control
- ▶ Strobe effect with 12 x 1W LEDs
- ▶ Individual DMX, automated or sound control of each effect
- ▶ 3 DMX modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation
- ▶ Includes handheld infrared remote





VOODOO 2-IN-1 DERBY AND STROBE EFFECT LIGHT

The Cameo Voodoo is a 2-in-1 hybrid fixture including derby and strobe effects that are individually controlled with a choice of automated, sound activation and 2-channel, 4-channel or 8-channel DMX modes. Featuring a heavy duty metal enclosure with convection cooling, 4-button display for intuitive setting, universal mounting bracket and safety eye for secure installation, the unit provides flexible master, slave and standalone applications. It comes with a convenient handheld infrared remote.

Product number:	CLVOODOO
Product type:	LED Lighting Effects
Type:	LED / Strobe / Effects
Colour Spectrum Derby Effect:	RGBA
Number of LEDs Derby Effect:	20
LED Type Derby Effect:	3 W
Colour Spectrum Strobe:	white
Number of LEDs Strobe:	12
LED Type Strobe:	1 W
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	8-channel, 4-channel, 2-channel
DMX Functions:	Strobe, sound programs, derby, auto programs
Standalone modes:	Sound programs, auto programs
Controls:	Up, down, mode, Enter
Indicators:	4-digit LED display
Power connector:	IEC power input and output
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	75 W
Housing material:	Metal
Cabinet colour:	Black
Housing Cooling:	Convection
Width:	275 mm
Height:	290 mm
Depth:	280 mm
Weight:	4.215 kg
Other features:	Security lock slot, adjustable mounting bracket included

NEW!



- ▶ 24 x 3W RGBA Derby Effect
- ▶ Individual DMX control of all 24 LEDs
- ▶ 4 DMX modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation
- ▶ Includes handheld infrared remote





ARA DERBY MATRIX BEAM LIGHT

With its unique three-arm construction and dazzling derby matrix effects, the Cameo Ara is a real eye-catcher. 3 watt quad LEDs create a vivid set of RGBA colours, and each of the 24 LEDs can be controlled individually via DMX for a magnificent lighting performance. The Ara's distinctive all-metal enclosure features a bright 4-button display for intuitive setting, efficient convection cooling and an adjustable bracket plus safety eye for secure mounting. It comes with a convenient handheld infrared remote, automated programs, sound activation, 4 modes of DMX control as well as master, slave and standalone capability to provide versatility and a wide range of applications. The multi-voltage fixture operates on 100 – 240 V AC and comes with 3-pin DMX and IEC power inputs and outputs that enable easy daisy-chaining.


Product number:	CLARA
Product type:	LED Lighting Effects
Type:	LED Effect Lights
Colour spectrum:	RGBA
Number of LEDs:	24
LED type:	3 W
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	8-channel, 4-channel, 2-channel, 3-channel
DMX Functions:	Matrix beam, sound programs, auto programs
Standalone modes:	Auto programs, sound programs
Controls:	Up, down, mode, enter
Indicators:	4-digit LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	75 W
Power connector:	IEC power input and output
Housing material:	Metal
Cabinet colour:	Black
Cooling:	Convection
Width:	210 mm
Height:	360 mm
Depth:	310 mm
Weight:	4.05 kg
Other features:	Security lock slot, adjustable mounting bracket included

NEW!



- ▶ 24 x 3W RGBA Derby Matrix Effect
- ▶ Individual DMX control of all 24 LEDs
- ▶ 4 DMX modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation



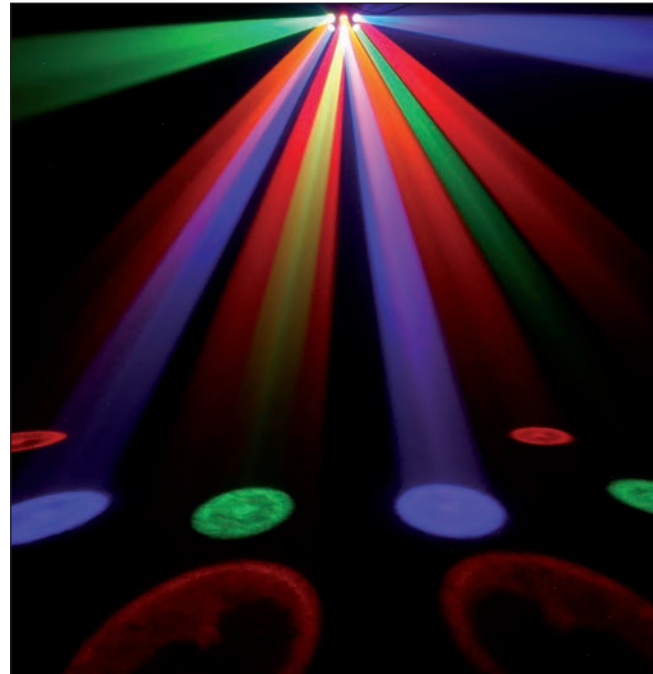

EYE-EYE DERBY MATRIX BEAM LIGHT

The Cameo Eye-Eye is a powerful derby matrix effect light with 2-channel, 3-channel, 4-channel and 8-channel DMX modes, automated programs and sound activation. In addition, the fixture features master, slave and standalone functionality. 24 quad LEDs with individual DMX control capability provide colourful RGBA mixes and spectacular lighting. The Eye-Eye comes in a heavy duty all-metal enclosure with convection cooling that sports an adjustable bracket and safety eye for secure mounting and a 4-button display for intuitive operation. Running on 100 – 240 V AC, the unit is equipped with with 3-pin DMX and IEC power inputs and outputs to facilitate daisy-chaining.

Product number:	CLEYEYE
Product type:	LED Lighting Effects
Type:	LED Effect Lights
Colour spectrum:	RGBA
Number of LEDs:	24
LED type:	3 W
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	3-channel, 8-channel, 2-channel, 4-channel
DMX Functions:	Auto programs, sound programs
Standalone modes:	Auto programs, sound programs
Controls:	Up, mode, Enter, down
Indicators:	4-digit LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	90 W
Power connector:	IEC power input and output
Housing material:	Metal
Cabinet colour:	Black
Width:	265 mm
Height:	280 mm
Depth:	165 mm
Weight:	3.635 kg
Other features:	Adjustable mounting bracket included, security lock slot

NEW!



- ▶ 16 x 3W RGBA Four Eyes Derby Matrix Effect
- ▶ Individual DMX control of all 16 LEDs
- ▶ 4 DMX modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation
- ▶ Includes handheld infrared remote





WAYFARER FOUR EYES DERBY MATRIX BEAM LIGHT

The Cameo Wayfarer is a top-flight four-eyes derby matrix light with a total of 16 RGBA 3 watt LEDs that are individually DMX controllable. Creating a rich palette of exciting colours and impressive effects, the fixture sports a heavy duty metal enclosure with efficient convection cooling, safety eye and adjustable mounting bracket. With 4 modes of DMX control, convenient infrared remote, sound activation, built-in automated programs and master, slave and standalone functionality the Wayfarer provides flexibility in a wide range of lighting applications. The multi-voltage unit operates on 100 – 240 volts and features a backlit 4-button display for easy operation. 3-pin DMX and IEC power inputs and outputs facilitate daisy-chaining.

Product number:	CLWAYFARER
Product type:	LED Lighting Effects
Type:	LED Effect Lights
Colour spectrum:	RGBA
Number of LEDs:	16
LED type:	3 W
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	2-channel, 3-channel, 4-channel, 6-channel
DMX Functions:	Matrix Beam, sound programs, auto programs
Standalone modes:	Sound programs, auto programs
Controls:	Up, mode, Enter, down
Indicators:	4-digit LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	75 W
Power connector:	IEC power input and output
Housing material:	Metal
Cabinet colour:	Black
Cooling:	Convection
Width:	400 mm
Height:	130 mm
Depth:	165 mm
Weight:	2.88 kg
Other features:	Adjustable mounting bracket included, security lock slot



- ▶ 60 W ultra high-power Cree LED
- ▶ 8 brilliant colours
- ▶ 7 different gobos
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED display
- ▶ Universal mounting bracket included
- ▶ Compact, sturdy metal housing



TECHNOLOGY



SOUND TO LIGHT



DMX



MASTER/SLAVE





GREEN SOLUTION



STAND ALONE MODE



STROBE EFFECT

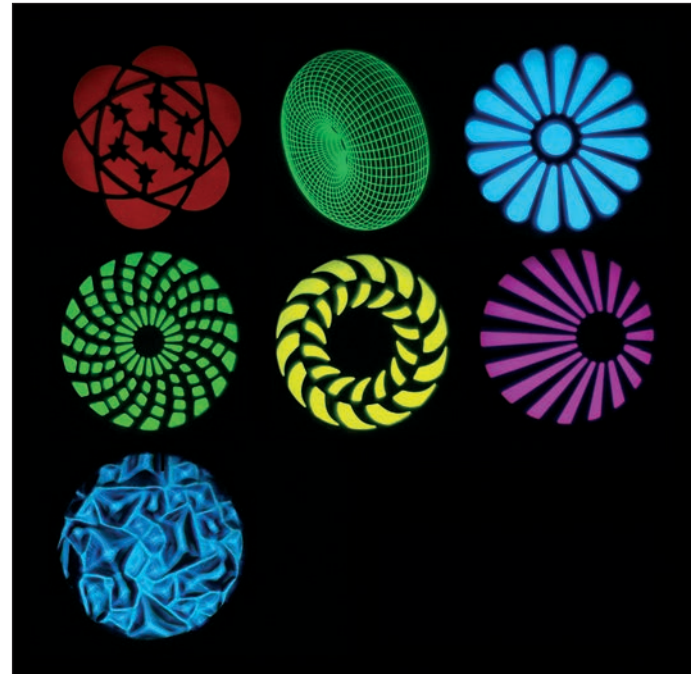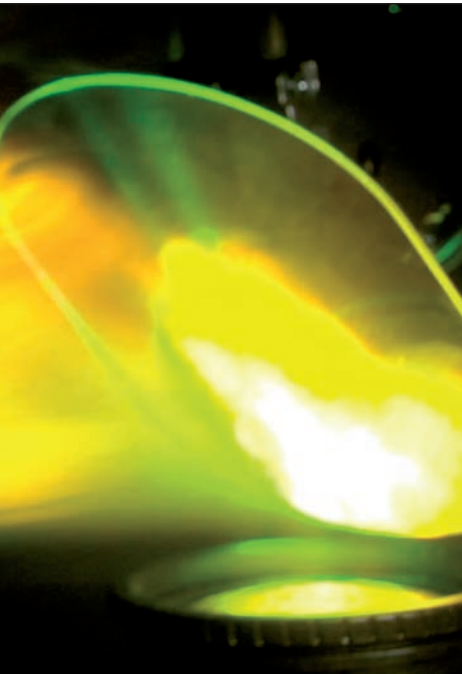

GOBO SCANNER 60 W LED GOBO SCANNER LIGHTING 60 W

The Cameo Gobo Scanner 60 W is a feature-packed LED scanner with rotatable prism and motorized focus for crisp and detailed gobo projection. It uses a powerful 60 W white LED by industry leader Cree for intense luminosity, long life and low power consumption. The CLSCAN60W is capable of 10-channel mode DMX, master, slave and standalone operation including automated programmes and sound activation to the beat of the music. With a selection of nine saturated colours, seven gobos plus open spot, 180° pan and 90° tilt, the Cameo Gobo Scanner 60 W allows for highly flexible lighting design and prism effects enhanced by the high-speed strobe, dimming and shutter functions.

Product number:	CLSCAN60W
Product type:	LED moving light
Type:	Scanner
Colour range:	8 channel multi colour + white
Number of LEDs:	1
LED type:	60 W
Number of gobos:	7 + open
DMX input:	XLR 3-pin
DMX output:	XLR 3-pin
DMX mode:	10-channel
DMX functions:	Pan, tilt, colour wheel, gobo wheel, shutter, dimmer, programme, focus control, prism
Pan movement:	Within 180°
Tilt movement:	Within 90°
High-speed strobe:	> 30 Hz
Standalone modes:	Auto run, sound control
Controls:	Mode, enter, value up, value down
Indicators:	LED display
Power supply:	230 V AC
Power consumption:	90 W
Power connector:	IECC Euro power socket male
Housing material:	Metal
Housing colour:	Black
Type of cooling:	Fan
Illuminance:	26,000 lx @ 1 m
Dimensions (W x H x D):	205 x 150 x 475 mm (excluding mounting bracket)

NEW!



- ▶ 4-head barrel scanner with four 10W Cree RGBW LEDs
- ▶ Quiet, high-quality stepper motors
- ▶ Adjustable barrel rotation speed
- ▶ 4 modes of DMX control plus sound activation
- ▶ Master, slave and standalone operation
- ▶ 16 automated light shows
- ▶ Dimmer and high-speed strobe functions
- ▶ 4-button display for easy operation
- ▶ Universal mounting bracket





QUADROLL 40 4-HEAD BARREL SCANNER



Creating awesome moving light effects the Cameo QuadRoll 40 features four mirrored barrels with dedicated high-power 10 watt Cree quad LEDs. The rotating barrels are driven by quiet, high-quality stepper motors swivelling intense, tightly focused RGBW beams with a 4.5° angle around the room. The QuadRoll 40 includes four modes of DMX control with adjustable rotation speed, dimmer and 1 to 20 Hz strobe functions, 16 automated light shows, sound activation and master, slave and standalone capability. The black metal enclosure sports four heatsinks for efficient convection cooling, IEC power and 3-pin DMX inputs and outputs and a 4-button display for easy, intuitive operation.

Product number:	CLQR40
Product type:	LED Moving Lights
Type:	LED Scanners
Colour spectrum:	RGBW
Number of LEDs:	4
LED type:	10 W Cree
Dispersion:	4.5°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	12-channel, 18-channel, 2-channel, 4-channel
DMX Functions:	Barrel Movement, strobe, auto 1-16, sound control, dimmer, colour macro
High Speed Strobe:	1 - 20 Hz
Standalone modes:	Auto 1-16, sound control
Controls:	Mode, value down, value up, enter
Indicators:	LED Display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	100 W
Power connector:	IEC power connector female, IEC power connector male
Housing material:	Metal
Cabinet colour:	Black
Cooling:	Convection
Illuminance:	White: 41,300 lx @ 1 m, blue: 6,000 lx @ 1 m, red: 17,300 lx @ 1 m, green: 23,500 lx @ 1 m
Width:	462 mm
Height:	221 mm
Depth:	137 mm
Weight:	5 kg



- ▶ 2 individually controllable gobo scanners in a single enclosure
- ▶ Powerful white 10 W Cree LEDs
- ▶ Each scanner with 9 brilliant colour / gobo combinations + open / white
- ▶ Manual focus adjustment
- ▶ 4 modes of DMX control
- ▶ Master, slave or standalone operation
- ▶ Automated programmes and sound control



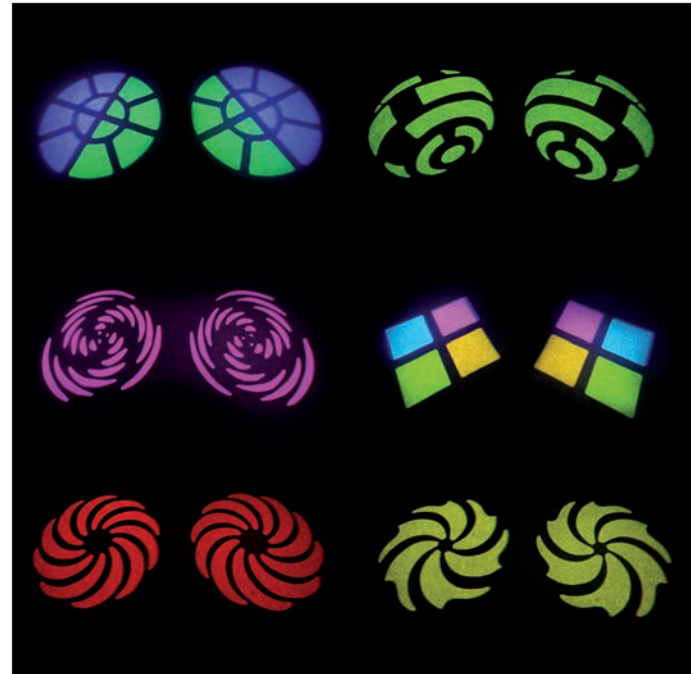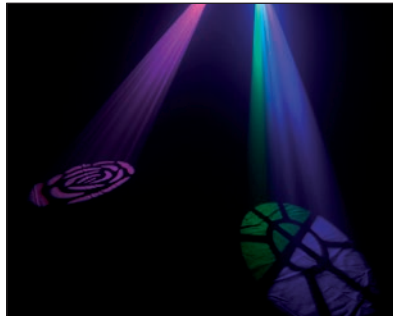

TWINSKAN 20

DUAL 10 W CREE LED GOBO SCANNER

The Cameo Twinscan 20 combines two scanners in a single enclosure with convection cooling for low-noise operation. Powered by long life white 10 W Cree LEDs, the scanners feature manual focus adjustment and 12° dispersion with 55° maximum pan. With nine brilliant gobo pattern and colour combos per side plus white, the Twinscan 20 provides luminous projections, smooth dimming and high-speed strobe effects. The low power consumption Twinscan 20 is ideal for mobile DJs, discotheques, clubs, bars and private functions. It is capable of DMX control in 1-channel, 3-channel, 4-channel and 8-channel modes as well as master, slave and standalone operation with its automated programmes and built-in microphone for sound activation.

Product number:	CLTWINSKAN20
Product type:	LED moving light
Type:	Double scanner, scanner
Colour spectrum:	9 colours + white
Number of LEDs:	2
LED type:	10 W
Dispersion:	12°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	4-channel, 8-channel, 3-channel, 1-channel
DMX functions:	Gobo / colour wheel, dimmer, sound control, pan, strobe
Pan movement:	55
High-speed strobe:	1 - 20Hz
Standalone modes:	Sound control, auto 1-9
Controls:	Value up, value down, mode, enter
Indicators:	LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	35 W
Power connector:	IEC power connector male
Housing material:	Metal
Cabinet colour:	Black
Illuminance:	2,400 lx @ 1 m
Dimensions (W x H x D):	545 x 151 x 180 mm (excluding mounting bracket)

NEW!



- ▶ All-in-one lighting system with 5 intense effects including 2 brilliant LED PAR cans, 2 rotating LED derbies, 4 strobe LEDs, a grating laser and UV light
- ▶ Pre-mounted to a bar with pole insert for instant set-up and use
- ▶ Includes a convenient carry bag, wireless footswitch, infrared remote control and truss mounting brackets
- ▶ 46 built-in programs for mesmerizing light shows that include all 5 effects
- ▶ Multiple control options including a 4-button display, DMX, infrared remote, wireless footswitch, sound activation and automatic operation
- ▶ All effects usable individually and in combinations
- ▶ PAR lights with 12 high-performance 12 W RGB+UV LEDs
- ▶ Derby effect with 6 powerful 3 W RGB LEDs
- ▶ Grating laser with 200 mW output (red = 150 mW, green = 50 mW)
- ▶ Strobe effect with 4 white 3W LEDs





MULTI FX BAR


ALL-IN-ONE SOLUTION WITH 5 LIGHTING EFFECTS FOR MOBILE DJs, ENTERTAINERS AND BANDS


Featuring 5 amazing pre-mounted fixtures, the Cameo Multi FX Bar is the favorable all-in-one solution for mobile DJs, entertainers and bands to spice up their performance with terrific lighting. The system combines a pair of flat PAR cans, two LED Derby lights, a laser and strobe plus ultraviolet light for colorful illumination, magnificent rotating beams, impressive grating and stunning slow-motion effects.

Product number:	CLMFXBAR
Product type:	All-In-One LED Lighting System
Type:	Multi Bar
Spot Colour Spectrum:	RGB+UV
Number Of Spot LEDs:	12
Spot LED Type:	12 W
Derby Colour Spectrum:	RGB
Number Of Derby LEDs:	6
Derby LED Type:	3 W
Laser Colour Spectrum:	Red LED (650 nm), green LED (532 nm)
Number Of Laser Diodes:	2
Laser Diode Type:	1 x red 150 mW, 1 x green 50 mW (DPSS laser)
Laser Category:	3R
Laser Shutdown (safety function):	Key switch, emergency stop switch interlock connector
Strobe Colour:	White
Number Of Strobe LEDs:	4
Strobe LED Type:	3W
DMX Functions:	PAR, derby, laser strobe, auto programs, auto program speed, sound sensitivity
Standalone Functions:	Auto programs, sound programs, slave, colours
Controls:	Mode, Enter, Up, Down
Display:	4-digit LED
Power Connectors:	IEC inlet and outlet
Operating Voltage:	100 V - 240 V AC, 50 - 60 Hz
Power Consumption:	120 W
Fuse:	T3.15 A
Maximum Ambient Temperature:	40°C



- ▶ 4 x 30 W ultra-bright RGB LEDs
- ▶ COB Technology for smooth colour mixing
- ▶ Professional 28-mm TV adapter for mounting
- ▶ New designed optional footswitch for easy on stage controlling
- ▶ IR remote included
- ▶ Operated via DMX, in master/slave mode, standalone mode or via IR remote
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LC display
- ▶ Heavy duty aluminium housing
- ▶ Practical transport case included
- ▶ Installation points and switchable power plugs for 2 additional lights

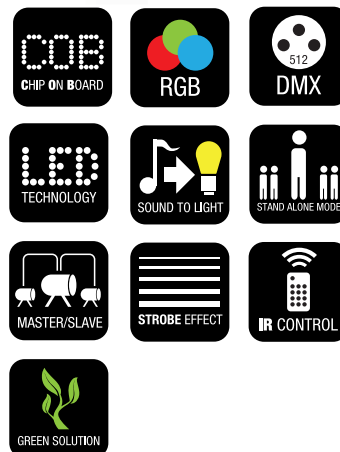

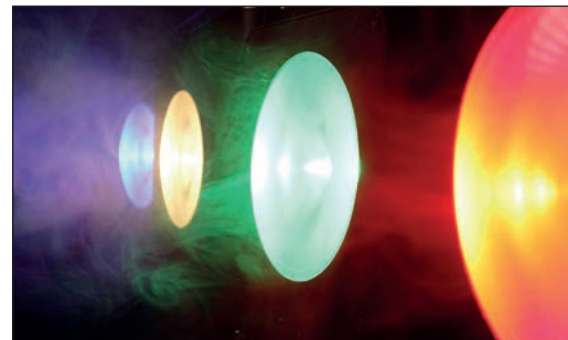

MULTI PAR COB1


COMPACT 4 X 30 W RGB COB LED LIGHTING SET INCL. TRANSPORT CASE

The Cameo CLMPARCOB1 is a compact and lightweight professional lighting system using modern chip-on-board LED technology, which is extremely durable and very energy efficient. The four flat PAR spotlights with a 50° beam angle are ultra-bright 30 W COB LEDs designed for intensive RGB colour mixing and both horizontal and vertical alignment.

Product number:	CLMPARCOB1
Product type:	LED lighting system
Type:	Multi PAR system
Colour range:	RGB
Number of LEDs:	4 x 1
LED type:	30 W COB
Beam angle:	50°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	6-channel, 8-channel, 4-channel, 17-channel, 3-channel, 7-channel, 12-channel, 5-channel
DMX functions:	RGB, master dimmer, 13 programmes, strobe, sound control, switchable power sockets 1/2
Standalone modes:	Strobe, 13 programmes, sound control, auto run, slave mode, static colour
Standalone features:	Flow invert, dimmer curve, master dimmer
Controls:	IR remote, value up, value down, mode, enter
Remote connection:	XLR 5-pin female
Display:	Multifunction LC display
Power supply:	90 V AC - 250 V AC, 50 - 60 Hz
Power consumption:	55 W
Power connector:	Neutrik powerCON
Housing material:	Metal
Housing colour:	Black
TV spigot:	28 mm
Dimensions (W x H x D):	1,005 x 285 x 80 mm (excluding mounting bracket)
Accessories (included):	Power cord 3 m
Other features:	Installation points for 2 additional lights, Neutrik powerCON output, IR remote



- ▶ 4 x 7 ultra-bright 8 W quad RGBW LEDs
- ▶ RGBW for perfect mixing of solid and pastel colours
- ▶ Professional 28-mm TV adapter for mounting
- ▶ Optional footswitch for easy on stage controlling
- ▶ IR-Remote included
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LC-Display
- ▶ Heavy duty aluminium housing
- ▶ Practical transport case included as standard

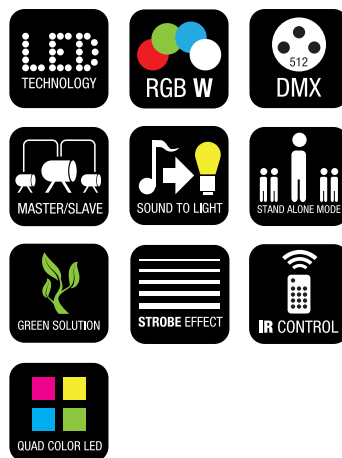



MULTI PAR 3

COMPACT 28X8 W QUAD COLOUR LED LIGHTING SET INCL. TRANSPORT CASE


The Cameo CLMPAR3 is an especially compact and flexible lighting system for professional requirements with maximum brightness and perfect RGBW colour mixing. The four flat PAR floodlights, each with seven ultrabright 8 W quad LEDs and 25° beam angle, are convection cooled and mounted on a bar with integral controls and all connectors so that they are individually aimable. Neutrik powerCON sockets are used for power supply and passing on incoming power; external components can be powered via two safety sockets that are switchable by remote control. The lighting system is controlled via DMX, the included IR remote control, an optional foot pedal or the clearly arranged, backlit LC display with four function keys.

Product number:	CLMPAR3
Product type:	Compact LED lighting set
Type:	4 flat can bar
Colour range:	RGBW
Number of LEDs:	4 x 7
LED type:	8 W quad colour
Beam angle:	25°
DMX input:	XLR 3-pin male
DMX output:	XLR 3-pin female
DMX mode:	4-channel 1, 4-channel 2, 6-channel, 8-channel, 9-channel, 6-channel, 21-channel selectable
DMX functions:	RGBW, master dimmer, strobe, sound control, programme mode, switchable, power sockets 1/2
Standalone modes:	Programme mode (static colour, colour change, colour fading, etc.), sound mode, slave, auto run, dimmer mode
Standalone features:	Flow invert, dimmer curve, master dimmer
Remote connector:	XLR-5 pin female
Controls:	Mode, enter, value up, value down
Wireless remote control:	IR
Indicators:	2 x 16 digit LC display
Power supply:	90 V AC - 250 V AC
Power consumption:	210 W
Power connector:	Neutrik powerCON input / output
Switchable power out:	2 x safety
Housing material:	Metal
Housing colour:	Black
Dimensions (W x H x D):	1,030 x 290 x 100 mm (excluding mounting bracket)



- ▶ 4 x 7 ultra-bright 3W tri-RGB LEDs
- ▶ Professional 28-mm TV spigot for mounting
- ▶ Optional footswitch for easy on stage controlling
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LC display
- ▶ Sturdy metal housing
- ▶ Practical transport case included as standard



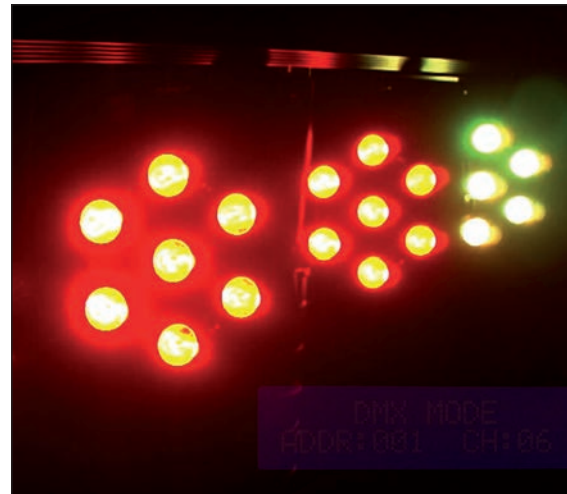


MULTI PAR 2

COMPACT 28X3W TRI-COLOUR LED LIGHTING SET INCL. TRANSPORT CASE



The four compact flat cans mounted on a bar with integrated control make the CLMPAR2 the ideal basic kit for stage lighting. A total of 28 ultra-bright 3 W tri-colour LEDs create awe-inspiring brightness and a perfect colour mix. The CLMPAR2 is equipped with 3-pin inputs and outputs to enable actuation via DMX with 6, 9 or 15 channels. Alternatively, the CLMPAR2 can be actuated with an optional controller, which is connected via the corresponding five-pin cable. The four sturdy foot switches allow access to all of the show's key parameters. Of course, the CLMPAR 2 also works in standalone mode, with a microphone for sound control integrated into the bar. The CLMPAR2 is powered via a removable safety cable and is equipped with a 28 mm TV adapter for tripod-mounting. The practical transport case is included as standard.

Product number:	CLMPAR2
Product type:	Compact LED lighting set
Type:	4 flat can bar
Colour range:	RGB
Number of LEDs:	4 x 7
LED type:	3 W tri-colour
Beam angle:	25°
DMX input:	XLR 3-pin
DMX output:	XLR 3-pin
DMX mode:	6/9/15-channel selectable
DMX functions:	RGB, master dimmer, strobe, sound control, colour jump, colour fade
Standalone modes:	Static colour, colour change, colour fading, sound control, slave, auto mode
Remote connector:	XLR-5 pin female
Controls:	Mode, enter, value up, value down
Indicators:	LC display
Power supply:	100 V AC - 250 V AC
Power consumption:	100 W
Power connector:	IECC Euro power socket male, IECC Euro power socket female
Housing material:	Metal
Housing colour:	Black
TV spigot:	28 mm
Dimensions (W x H x D):	1,030 x 290 x 100 mm

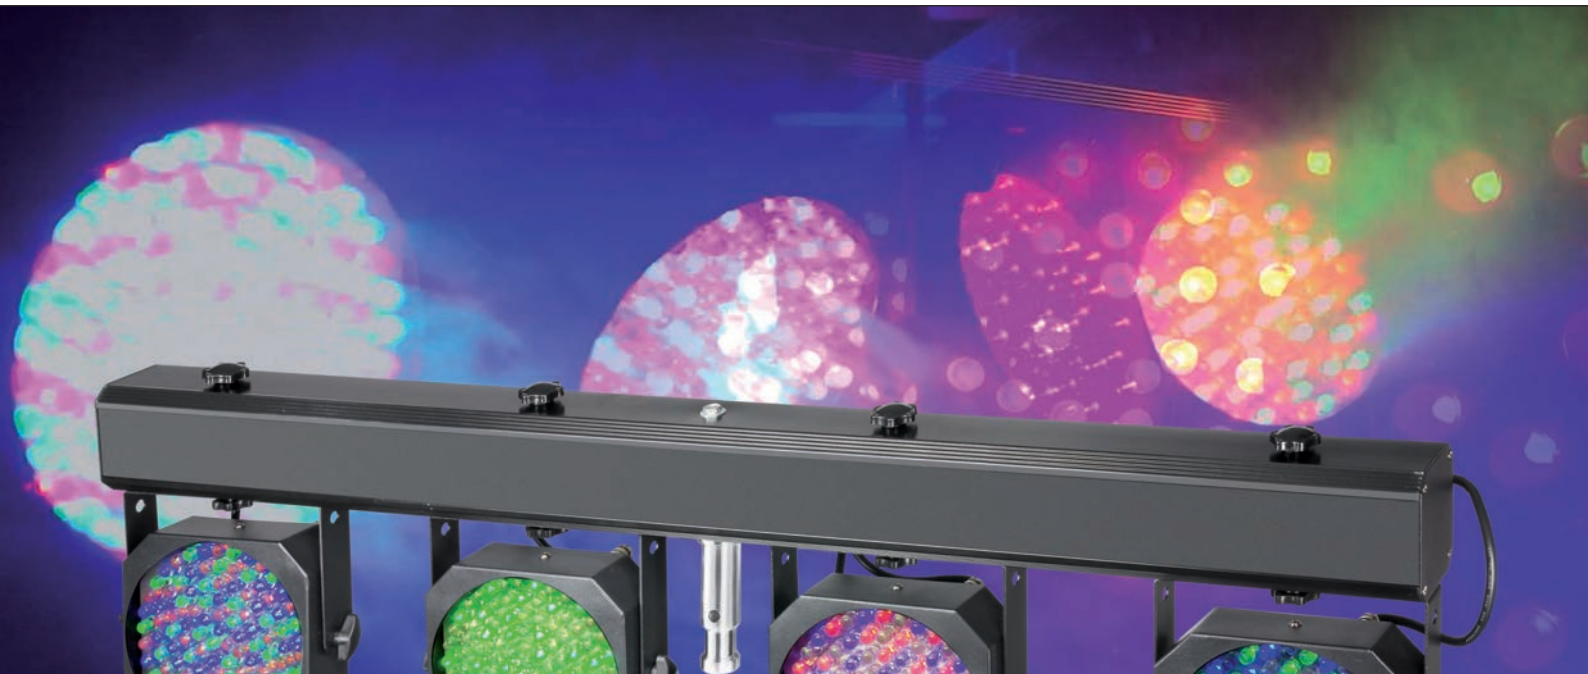

- ▶ 4 x 108 powerful, long-life 10 mm RGB LEDs
- ▶ Professional 28 mm TV spigot for mounting
- ▶ Optional footswitch for easy on stage controlling
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LC display
- ▶ Sturdy metal housing
- ▶ Practical transport case included as standard



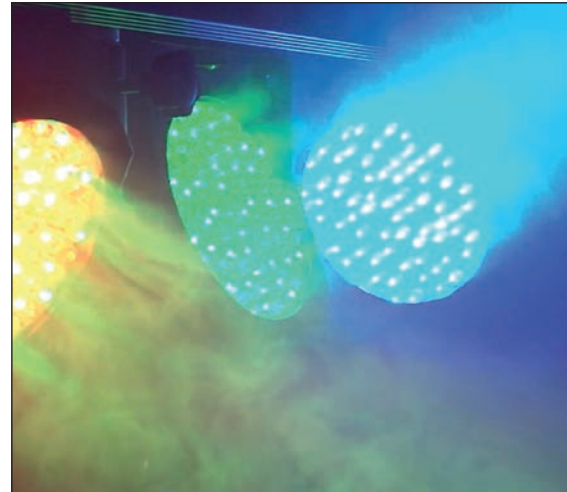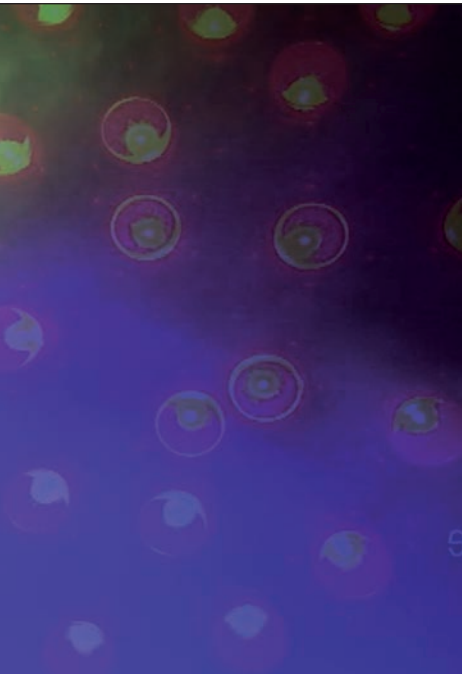

MULTI PAR 1

COMPACT 432 X 10 MM LED LIGHTING SET INCL. TRANSPORT CASE

The four compact flat cans mounted on a bar with integrated control make the CLMPAR1 the ideal basic kit for stage lighting. Each of the four flat cans is fitted with 108 ultra-bright 10 mm LEDs, creating awe-inspiring brightness and the perfect colour mix. The CLMPAR1 is equipped with 3-pin inputs and outputs to enable actuation via DMX with 6, 9 or 15 channels. Alternatively, the CLMPAR1 can be actuated by an optional controller. Of course, the CLMPAR1 also works in standalone mode, with a microphone for sound control integrated into the bar. A 4-way foot controller is available as an optional extra. The CLMPAR1 is powered via a removable safety cable and is equipped with a 28 mm TV adapter for tripod-mounting. The practical transport case is included as standard.

Product number:	CLMPAR1
Product type:	Compact LED lighting set
Type:	4 flat can bar
Colour range:	RGB
Number of LEDs:	4 x 108
LED type:	10 mm
Beam angle:	25°
DMX input:	XLR 3-pin
DMX output:	XLR 3-pin
DMX mode:	6 / 9 / 15-channel selectable
DMX functions:	RGB, master dimmer, strobe, sound control, colour jump, colour fade
Standalone modes:	Static colour, colour change, colour fading, sound control, slave, auto mode
Remote connector:	XLR-5 pin female
Controls:	Mode, enter, value up, value down
Indicators:	LC display
Power supply:	100 V AC - 250 V AC
Power consumption:	50 W
Power connector:	IECC Euro power socket male, IECC Euro power socket female
Housing material:	Metal
Housing colour:	Black
TV spigot:	28 mm
Dimensions (W x H x D):	1,030 x 290 x 100 mm



- ▶ Easy on stage control for CLMPAR1, CLMPAR2, CLMPAR3 & CLMPARCOB1
- ▶ Functions: black out, full on, sound control, static colours, light 1/2, auto run
- ▶ Rugged metal housing
- ▶ 10 m 5-pin XLR connection cable included



MULTI PAR FOOT + 4-SWITCH FOOT PEDAL FOR ALL CLMPAR LIGHT SETS

The Cameo CLMPARFOOTPLUS universal Multi PAR 4-switch foot pedal gives you optimum control of all Cameo LED lighting system CLMPAR3 functions— even without connection to a DMX controller. All the functions can be activated via four solid, non-slip foot switches. Three LEDs are integrated in the compact, solid housing of the Cameo Multi PAR 4-switch foot pedal for visual control of all the functions (mode up, mode down, blackout, sound active, programme, colours, full on).

The device is connected via a 10 metre, 5-pin XLR cable, supplied with the device and is compatible with the following devices: CLMPAR1, CLMPAR2, CLMPAR3 and CLMPACOB1.

Product number:	CLMPARFOOTPLUS
Product:	Foot switch
Controls:	Mode, up, down, blackout, microphone sensitivity, CD/USB/SD
Indicators:	Programme selection, static colour, sound control
Connectors:	5-pin XLR male
Dimensions (W x H x D):	291 x 65 x 103 mm
Features:	10 m 5-pin XLR cable included

NEW!



- ▶ Powerful 1,500 watt microprocessor-controlled touring haze machine
- ▶ Rugged road case
- ▶ 1,020 m³ output capacity per minute
- ▶ Extended-life stainless steel vapor tube
- ▶ Automatic self-cleaning mechanism
- ▶ Haze emission and fan speed individually adjustable in 100 increments
- ▶ 2-channel DMX control and standalone functionality
- ▶ Integrated fluid canister drawer
- ▶ Whisper-quiet operation
- ▶ Ideal for TV, motion pictures, theaters, discotheques and live events
- ▶ Enhances any light show





INSTANT HAZER 1500 T PRO TOURING HAZER WITH MICROPROCESSOR CONTROL

Ready for the road, the Instant Series Hazer 1500 T Pro comes in a tough and durable touring case. With a huge output capacity of 1,020 m³ per minute, extremely short pre-heating time of 45 seconds only and whisper-quiet operation it is ideal for portable applications in TV and motion picture productions, fashion shows, live events and mobile discotheques. The highly efficient, microprocessor-controlled haze machine features a long-life vapor tube of grade 316 stainless steel and automatic self-cleaning mechanism to prevent residue build-up and minimize maintenance. The unit's haze emission and projection fan speed are individually variable in 1% increments to suit stages and venues of any size, fluid consumption at 100% output is a low 17 ml per minute.

Product number:	CLIH1500TPRO
Product type:	Fog and Wind Machines
Type:	Hazer
Power:	1,500 W
Max. Output:	1,020 m ³ /min
Warm-up Time:	45 sec.
Fluid Consumption:	17 ml / min (100% Output)
DMX input:	XLR 3-pin male, XLR 5-pin male
DMX output:	XLR 3-pin female, XLR 5-pin male
DMX mode:	2-channel
DMX Functions:	Fan, Vapour Volume
Standalone modes:	Fan, Vapour Volume
Controls:	Value Up, Value Down, Start/Stop/Mode
Indicators:	3-segment LED display
Operating voltage:	240 V AC, 50 Hz
Power consumption:	1,500 W
Overheating Protection:	Heating element with thermostat
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Cabinet colour:	Black
Recommended Fluid:	INSTANT HAZE (not included)
Total dimensions	
Width:	415 mm
Height:	266 mm
Depth:	555 mm
Weight:	25 kg

NEW!



- ▶ Microprocessor controlled 1,400 Watt Hazer
- ▶ Max. output volume 991 m³ per minute
- ▶ Long-lasting evaporation tube made of stainless steel 316
- ▶ Automatic self-cleaning
- ▶ Output and fan individually adjustable in 100 increments
- ▶ 2-channel DMX control and standalone mode
- ▶ Built-in insert for fluid canisters up to 5 L
- ▶ Whisper-quiet operation
- ▶ Ideal for TV, film, theatre, discos and live events
- ▶ Enriches the effect of any light show





INSTANT HAZER 1400 PRO HAZER WITH MICROPROCESSOR CONTROL

The Cameo Instant Series Air 1000 Pro is a high-performance wind machine for applications in theaters, fashion shows, motion pictures, clubs, discotheques, theme parks and live music. With a maximum air flow of 56 m³ per minute and continuously adjustable fan speed it creates a wide range of wind effects from the slightest breeze to strong, heavy gusts. The air stream exhaust port is continuously variable to allow for precise directional throw or widespread diffusion up to 21 m and 180°. The Air 1000 Pro is DMX-controllable, provides standalone functionality and includes a convenient handheld infrared remote. It features 3-pin and 5-pin DMX inputs and outputs, a 3-segment LED display and low-noise fan motor for whisper-quiet operation.

Product number:	CLIH1400PRO
Product type:	Fog and Wind Machines
Type:	Hazer
Power:	1,400 W
Max. Output:	991 m ³ /min
Warm-up Time:	45 sec.
Fluid Consumption:	17 ml/min (100% Output)
DMX input:	XLR 3-pin male, XLR 5-pin male
DMX output:	XLR 5-pin male, XLR 3-pin female
DMX mode:	2-channel
DMX Functions:	Vapour volume, fan
Standalone modes:	Vapour volume, fan
Controls:	Start / stop / mode, value up, value down
Indicators:	3-segment LED display
Operating voltage:	240 V AC, 50 Hz
Power consumption:	1,400 W
Overheating Protection:	Heating element with thermostat
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Cabinet colour:	Black
Recommended Fluid:	INSTANT HAZE (not included)
Total dimensions	
Width:	345 mm
Height:	300 mm
Depth:	365 mm
Weight:	20.1 kg

NEW!



- ▶ Powerful professional wind machine
- ▶ Max. air flow 56 m³ per minute
- ▶ Ultra-quiet 31 cm fan fan
- ▶ Adjustable in 1% increments from 1 - 100
- ▶ Infinitely adjustable output aperture up to 180°
- ▶ DMX control
- ▶ RF remote control included
- ▶ Floor or truss mounting





INSTANT AIR 1000 PRO WIND MACHINE WITH VARIABLE POWER AND DIRECTIVITY

The Instant Air 1000 Pro from the Cameo Instant series is a highly efficient wind machine for use in theatres, on catwalks, in films, clubs, discos, theme parks and live concerts. Thanks to a maximum air flow of 56 m³ per minute and a precise fan strength adjustable in one percent increments, it produces numerous effects from light breeze up to forceful gusts of wind. The output angle can be infinitely adjusted up to 180°, thus allowing a precise jet of air or a wide diffusion with a range of up to 21 m. The Instant Air 1000 Pro can be controlled via DMX, as a standalone device and is operated with a comfortable RF remote control. It features 3-pin and 5-pin DMX inputs and outputs, a clear LED display and an extremely low-noise fan motor for whisper-quiet operation.

Product number:	CLIA1000PRO
Product type:	Fog and Wind Machines
Type:	Wind machine
Max. Air Flow:	56 m ³ /min
Max. Distance:	21 m
Noise:	45 db - 51 db
Fan Diameter:	310
DMX input:	XLR 5-pin male, XLR 3-pin male
DMX output:	XLR 5-pin male, XLR 3-pin female
DMX mode:	1-channel
DMX Functions:	Fan
Standalone modes:	Fan
Indicators:	3-segment LED display
Operating voltage:	240 V AC, 50 Hz
Power consumption:	75 W
Power connector:	Power cord with safety plug (Type E / CEE 7/7)
Cabinet colour:	Black
Total dimensions	
Width:	385 mm
Height:	385 mm
Depth:	515 mm
Weight:	10.9 kg



HAZE FLUID 5L/10L

FOR FINE FOG DENSITY AND
LONG STANDING TIME

CLFHAZE5L / CLFHAZE10L



HEAVY FLUID 5L/10L

FOG FLUID WITH VERY HIGH DENSITY
AND VERY LONG STANDING TIME

CLFHEAVY5L / CLFHEAVY10L



XTRA HEAVY FLUID 5L / 10L

FOG FLUID VERY HIGH DENSITY AND
EXTREME LONG STANDING TIME

CLFXHEAVY5L / CLFXHEAVY10L



DJ FLUID 5L/10L

FOG FLUID WITH MEDIUM DENSITY
AND MEDIUM STANDING TIME

CLFDJ5L / CLFDJ10L



FLUIDS

There are different versions of Cameo Fluids for professional fog machines, haze machines, snow machines and as bubble fluid for bubble machines. The Fine Fluid creates haze effects with conventional fog machines, which can be easily cleaned with our Cleaning Fluid. Cameo fog fluids are characterised by an excellent reflective behaviour, are not harmful to health and are biodegradable.



MADE IN GERMANY!



BIODEGRADABLE

READY FOR USE



FAST FLUID 5 L

FOG FLUID WITH VERY HIGH DENSITY AND VERY SHORT STANDING TIME

CLFFAST5L



FINE FLUID 5 L

HAZE EFFECT FOG FLUID WITH VERY HIGH DENSITY AND VERY LONG STANDING TIME

CLFFINE5L



SNOW FLUID 5 L

SPECIAL FLUID FOR SNOW MACHINES FOR THE PRODUCTION OF FOAM

CLFSNOW5L



BUBBLE FLUID 5 L

SPECIAL FLUID FOR GENERATING SOAP BUBBLES

CLFBUBBLE5L



INSTANT HAZE FLUID 5 L

SPECIAL OIL FREE FLUID FOR CAMEO INSTANT HAZE MACHINES

CLFIH5L



CLEANING FLUID 250 ML

SPECIAL FLUID FOR CLEANING FOG MACHINES

CLFCLEANER250



- ▶ Professional DMX splitter / booster
- ▶ Chassis 1U 19" rack-mount enclosure
- ▶ 6 or 8 electrically isolated XLR (5-pin/3-pin) outputs
- ▶ DMX status indicator per channel
- ▶ Power status indicator
- ▶ Switchable 120 Ohm terminating resistor for the DMX THRU output jack
- ▶ Front and rear rack-mount angle attachment options



SB 8.5 / SB 8.3 / SB 6 DUAL 6 / 8-CHANNEL DMX SPLITTER / BOOSTER 5-PIN, 3-PIN

The Cameo CLSB85/CLSB83 / CLSB6D is a professional splitter and booster for configuring DMX networks, that can be connected either directly to a DMX console or to DMX devices. The 19" unit (1U) amplifies the DMX input signal and distributes it to six or eight electrically isolated outputs on the back; bright LEDs show the DMX and power status of the channels on the front panel. The input and the THRU socket for looping of the signal are duplicated on the front and back of the CLSB85/CLSB83 / CLSB6D and connected in parallel. A switchable 120 Ohm terminating resistor on the DMX THRU output and the power switch complete the equipment; the IEC cable is supplied. For convenient output connector access and reverse installation, the rack-mount angles can be attached to the rear of the chassis.

Product number:	CLSB85	CLSB83	CLSB6D
Product type:	DMX 512 protocol	DMX 512 protocol	DMX 512 protocol
DMX inputs:	2 (parallel)	2 (parallel)	2 (parallel)
DMX input connectors:	5-pin XLR male	3-pin XLR male	3 & 5-pin XLR male
DMX thru outputs:	2 (parallel)	2 (parallel)	2 (parallel)
DMX thru output connectors:	5-pin XLR female	3-pin XLR female	3 & 5-pin XLR female
DMX outputs:	8 (electrically isolated)	8 (electrically isolated)	6 (electrically isolated)
DMX output connectors:	5-pin XLR female	3-pin XLR female	3 & 5-pin XLR female
Controls:	Power on/off, DMX thru terminator	Power on/off, DMX thru terminator	Power on/off, DMX thru terminator
Indicators:	8 x power LED, 8 x signal LED	8 x power LED, 8 x signal LED	6 x power LED, 6 x signal LED
Power socket:	IEC power socket	IEC power socket	IEC power socket
Power supply:	Transformer	Transformer	Transformer
Operating voltage:	230 V AC, 50 Hz	230 V AC, 50 Hz	230 V AC, 50 Hz
Power consumption:	15 W	15 W	15 W
Housing material:	Metal	Metal	Metal
Housing colour:	Black	Black	Black
Dimensions (W x H x D):	483 x 44 x 160 mm (excl. mntg. bracket)	483 x 44 x 160 mm (excl. mntg. bracket)	483 x 44 x 160 mm (excl. mntg. bracket)
Accessories (included):	Power cord	Power cord	Power cord

NEW!



GEARBAG 100 S

UNIVERSAL EQUIPMENT BAG

230 X 230 X 310 MM



GEARBAG 100 M

UNIVERSAL EQUIPMENT BAG

330 X 330 X 355 MM



GEARBAG 300 S

UNIVERSAL EQUIPMENT BAG

460 X 220 X 220 MM



GEARBAG 300 M

UNIVERSAL EQUIPMENT BAG

580 X 250 X 250 MM



GEARBAGS

Cameo gear bags are the convenient way to carry and protect your equipment. Made from rugged, ultra durable materials they feature adjustable, removable partition walls to organize the interior and generous outside pouches for accessories. Cameo gear bags are available in different sizes.



GEARBAG 200 S
UNIVERSAL EQUIPMENT BAG
330 X 330 X 240 MM



GEARBAG 200 M
UNIVERSAL EQUIPMENT BAG
470 X 410 X 270 MM



GEARBAG 300 L
UNIVERSAL EQUIPMENT BAG
630 X 350 X 350 MM



GEARBAG 400 S
UNIVERSAL EQUIPMENT BAG
1120 X 180 X 115 MM



loving U.



- INTERCHANGEABLE MIC HEADS
- PILOT TONE
- 100 METER TRANSMISSION RANGE
- LOW ENERGY CONSUMPTION
- HIGH CONTRAST OLED DISPLAY
- HEADSET AVAILABLE
- DOUBLE RECEIVER AVAILABLE



U500[®] SERIES

PROFESSIONAL WIRELESS MICROPHONE SYSTEMS

Making professional technology and sound most affordable, the U500[®] Series has been designed around you. We listened to your feedback and are now introducing a wireless system for live vocals with amazing performance and reliability that is sure to surpass your expectations. With a focus on pro and semi-pro users, our engineering and development created the U500[®] Series so you can share your emotions and great onstage moments.



EKS 20 M

Emergency stop switch with key control and 20 m cable

The EKS 20 m is a key controlled push-to-stop and twist-to-release master switch that connects to a laser lights' remote interlock input. The unit features a highly visible bright yellow enclosure of hardwearing impact resistant plastic with a red emergency stop palm button. The metal interlock connector of the permanently attached double shielded 20 m cable is suitable for all Cameo lasers. The interlock connector can easily be replaced with that included with your laser. The EKS 20 M is compliant with all European regulations for Class IIIb and IV laser light safety.

Product number:	CLLEKS20M
Product type:	Emergency stop
Switching function:	Opener (contact B red) & shutter (contact A green)
Width:	72 mm
Height:	65 mm
Length:	110 mm
Weight:	1.1 kg

- ▶ Remote emergency stop for laser lights
- ▶ Push-to-stop, twist-to-release red palm button
- ▶ Key control prevents unauthorized operation
- ▶ Fixed 20 m double shielded cable
- ▶ Metal interlock connector



ILDA

ILDA extension cable incl. screw lock 3, 5, 10, 25 m

Product number:	CLLILDAXX M
Product type:	ILDA signal cable
Connector 1:	25-pin Sub-D male
Connector 2:	25-pin Sub-D female
Colour:	Black
Length:	3 / 5 / 10 / 25 m
Features:	Incl. screw lock



Tri-Colour RGB LEDs

Also called 3-in-1, RGB LEDs have red, green and blue emitters to produce the RGB additive colour spectrum and white.



LED Technology

LEDs are extremely advantageous for the use in lighting systems: they are bright, emit very little heat, have a very long lifetime and low energy consumption. Also, LED fixtures often weigh less than conventional fixtures.



Eco-Friendly

With highly efficient energy use, a very long LED lifetime and low heat emission, this fixture is environmentally friendly.



DMX512

Created in 1986, DMX512 is a communications standard for lighting equipment. Up to 32 DMX fixtures can be daisy-chained and controlled by a dedicated source, e.g. a lighting console. In a DMX512 daisy chain "network", the controller is called "master" while the daisy-chained fixtures are the "slaves."



"Master" and "Slave"

Simply put, this fixture is able to control or be controlled by other fixtures. In "master" mode and first in a chain, the fixture acts as a controller for fixtures ("slaves") that are connected to its output. In "slave" mode, the input of the fixture is connected to the output of a lighting console or "master." Fixtures that are daisy-chained to a slave's output also act as slaves.



Sound Control

In "sound to light" mode, the fixture is controlled by a built-in microphone capturing sounds to activate colour changes, e.g. the beat of the music.



Standalone Mode

In "standalone" mode, this fixture uses built-in programmes to control its functions. There is no need for a lighting console or "master" controller.



Strobe Lighting

Strobe lights emit a large number of periodic flashes per second seemingly freezing the movement of objects thus creating the illusion of slow motion.



Single Pixel Control

This device features single pixel control. With individual LED pixel on/off status and colour control this fixture is capable of creating animated patterns and video panel style pixel-mapping effects.



Dust Proof Housing

This laser fixture features a dust proof enclosure. The dust proof housing provides effective sealing against the intrusion of dust and particles. This improves performance and minimizes maintenance.



Scan Fail System

This laser fixture features a scan fail system. To provide safe audience scanning and prevent eye damage, the scan fail circuit shuts the laser down when a malfunction or scanner failure is detected, e.g. the display of a single dot beam.



Analog Modulation

This laser fixture features analog beam modulation. Analog modulation allows you to continuously and smoothly vary the beam intensity. An RGB laser is capable of generating 16.7 million colors with analog modulation while TTL modulated lasers provide only 7 colours and no color fading.



RGB Additive Colour System

Additive colour mixes use varying amounts of red, green and blue to produce other colours and white. The RGB system is used in television, computer monitors and digital cameras to name a few.



RGB Additive Colour System Plus Amber LEDs

Amber is a pure colour outside the RGB spectrum. Adding amber LEDs to the RGB system produces deeper, warmer, more saturated colours.



RGB Additive Colour System Plus White LEDs

Adding white LEDs to the RGB system produces more contrast and definition and enhances the RGB generated white and pastel colours.



RGBWA

RGB additive colour system plus white and amber LEDs.



COB LED Technology

The "chip-on-board" multi-LED array is a recent technology that produces a high-density large-area light source with high brightness and uniform diffusion for a rich wash of colours.



Ingress Protection Rating of 65

The IP code rates the degree of protection against the intrusion of solid objects, water and access to hazardous parts. This fixture is completely protected against hazardous contact, water jets and ingress of dust.



Ingress Protection Rating of 44

The IP code rates the degree of protection against the intrusion of solid objects, water and access to hazardous parts. This device is completely protected against ingress of wires, screws and splashes of water.



UV

UV or black lights are employed for decorative and artistic lighting effects.

ICON LEGENDS



Quad Colour RGBA/RGBW LEDs

Also called 4-in-1, quad colour LEDs add amber to the RGB spectrum for increased saturation, or white for improved contrast and definition.



5-in-1 LED

These fixtures add amber and white to the RGB spectrum for increased saturation, and white for improved contrast and definition.



6-in-1 LED

These fixtures add amber, white and UV to the RGB spectrum for increased saturation, and white for improved contrast and definition. UV or black lights are employed for decorative and artistic lighting effects.



Infrared Remote Control

Featuring an IR sensor, this fixture allows control with a handheld IR remote.



Remote Foot Controller

This fixture allows control with a remote foot controller.



Cold White

"Cold white" is a clean, very bright light in the 5,000 - 10,000 K range with a somewhat artificial touch that goes well with deeply saturated primary colours. Measured in degrees of Kelvin (K), colour temperature indicates the properties of light sources.



Warm White

"Warm white" is in the 2,000 - 4,000 K range providing a soft light with a slight touch of yellow that is natural and pleasing to the eye. Measured in degrees of Kelvin (K), colour temperature indicates the properties of light sources.



RDM-Enabled

This fixture is RDM-enabled. The Remote Device Management protocol extension to DMX allows bi-directional communication over a standard DMX network for the convenient configuration, management and monitoring of RDM devices connected to a dedicated RDM controller.



Unlimited Rotation

This moving head fixture features two high-speed high-torque motors for infinite horizontal and vertical rotation (pan and tilt).



ILDA

This laser fixture can be controlled with any ILDA-compatible controller.



Pan & Tilt

This moving head fixture features two high-speed high-torque motors for horizontal and vertical rotation (pan and tilt) which are controllable independently.



Kling-Net

This fixture is Kling-Net compatible.



Art-Net

This fixture is Art-Net compatible.



Zoom Function

This fixture features a motorized or manual zoom to vary its beam angle.



Laser Light

Due to its remarkable directional quality laser light maintains brightness and visibility over long distances. Producing tightly focused, narrow beams that are perfect for impressive lighting effects, laser sources are extremely energy-efficient.



Android Compatible

This fixture is delivered with a software allowing control via Android devices.



Mac OS and iOS Compatible

This fixture is delivered with a software allowing control via Mac OS X and iOS.



Windows Compatible

This fixture is delivered with a software allowing control via computers running on Windows.

Article no.	Model name	Description	Page
CGB100M	GearBag 100 M	Universal Equipment Bag 330 x 330 x 355 mm	226
CGB100S	GearBag 100 S	Universal Equipment Bag 230 x 230 x 310 mm	226
CGB200M	GearBag 200 M	Universal Equipment Bag 470 x 410 x 270 mm	227
CGB200S	GearBag 200 S	Universal Equipment Bag 330 x 330 x 240 mm	227
CGB300L	GearBag 300 L	Universal Equipment Bag 630 x 350 x 350 mm	227
CGB300M	GearBag 300 M	Universal Equipment Bag 580 x 250 x 250 mm	226
CGB300S	GearBag 300 S	Universal Equipment Bag 460 x 220 x 220 mm	226
CGB400S	GearBag 400 S	Universal Equipment Bag 1120 x 180 x 115 mm	227
CLABAR100	AURO BAR 100	LED Moving Bar	12
CLABEAM150	AURO BEAM 150	7 x 15 W RGBW LED Unlimited Moving Head	14
CLAM500	AURO MATRIX 500	5 x 5 LED Moving Matrix	10
CLARA	ARA	Derby Matrix Beam Light	192
CLAS100	AURO SPOT 100	LED Moving Head	22
CLAS200	AURO SPOT 200	LED Moving Head	20
CLAS300	AURO SPOT 300	Cameo AutoSpot 300 Moving Head	18
CLAS400	AURO SPOT 400	LED Moving Head	16
CLBARL10RGBA	BAR 10 RGBA	252 x 10 mm LED RGBA Colour Bar black	148
CLBARL10RGBAWH	BAR 10 RGBA WH	252 x 10 mm LED RGBA Colour Bar white	148
CLBARL10RGBIR	BAR 10 RGB IR	252 x 10 mm LED RGB Colour Bar black with IR Remote Control	150
CLBARL10RGBIRWH	BAR 10 RGB IR WH	252 x 10 mm LED RGB Colour Bar white with IR Remote Control	150
CLCONTROL54	CONTROL 54	54-CHANNEL DMX CONTROLLER	6
CLCONTROL6	CONTROL 6	6-Channel DMX Controller	8
CLDMXADAPTEROUT	DMX ADAPTER OUT	Adapter cable for IP65 outdoor projector IP65 plug to XLR female 3-pin	134
CLDMXEX001	DMX EX 001	DMX Extension Cable IP65 1m	133
CLDMXEX003	DMX EX 003	DMX Extension Cable IP65 3m	133
CLDMXEX005	DMX EX 005	DMX Extension Cable IP65 5m	133
CLDMXEX010	DMX EX 010	DMX Extension Cable IP65 10m	133
CLDMXEX020	DMX EX 020	DMX Extension Cable IP65 20m	133
CLDVC4	DVC 4	512-Channel DMX Interface and Control Software Package	4
CLEVEEYE	EYE-EYE	Derby Matrix Beam Light	194
CLFB150	FLASH BAR 150	3-in-1 Strobe, Chase and Blinder Effect Fixture	168
CLFBUBBLE5L	BUBBLE FLUID 5L	Special fluid for generating soap bubbles 5 L	223
CLFCLEANER250	CLEANING FLUID 0.25L	Special fluid for cleaning fog machines 250 ml	223
CLFDJ10L	DJ FLUID 10L	Fog fluid with medium density and medium standing time 10 L	222
CLFDJ5L	DJ FLUID 5L	Fog fluid with medium density and medium standing time 5 L	222
CLFFAST5L	FAST FLUID 5L	Fog fluid with very high density and very short standing time 5 L	223
CLFFINE5L	FINE FLUID 5L	Haze effect fog fluid with very low density and very long standing time 5 L	223
CLFHAZE10L	HAZE FLUID 10L	Haze fluid for fine fog density and long standing time, 10 L oil-free	222
CLFHAZE5L	HAZE FLUID 5L	Haze fluid for fine fog density and long standing time, 5 L oil-free	222
CLFHEAVY10L	HEAVY FLUID 10L	Fog fluid with very high density and very long standing time 10 L	222
CLFHEAVY5L	HEAVY FLUID 5L	Fog fluid with very high density and very long standing time 5 L	222
CLFIH5L	INSTANT HAZE FLUID 5L	Special Oil Free Fluid for Cameo INSTANT Haze Machines 5 l	223
CLFLATSTORM	FLAT STORM	3-in-1 flat PAR can with grating laser and strobe	174
CLFLOOD600IP65	FLAT PRO FLOOD 600 IP65	Outdoor Flood Light with 9x12W RGBWA+UV 6-In-1 LEDs	122
CLFLOODBARNDOOR	FLAT PRO FLOOD BARN DOOR	Barn doors for CLFLOODIP65, black	122
CLFLOODIP65TRI	FLAT PRO FLOOD IP65 TRI	Outdoor Flood Light with 60 Watt Tri-Color COB LED in black housing	124
CLFLOODIP65WW	FLAT PRO FLOOD IP65 WW	Outdoor Flood Light with 50 Watt Warm White COB LED in black housing	126
CLFLOWERHP	MOONFLOWER HP	32 W 4 in 1 RGBW Highpower LED effect	178
CLFSNOW5L	SNOW FLUID 5L	Special fluid for snow machines for the production of foam 5 L	223
CLFXHEAVY10L	XTRA HEAVY FLUID 10L	Fog fluid with very high density and extreme long standing time 10 L	222
CLFXHEAVY5L	XTRA HEAVY FLUID 5L	Fog fluid with very high density and extreme long standing time 5 L	222
CLHB100RGBW	HYDRABEAM 100 RGBW	Lighting system with 1 ultra-fast 10 W CREE RGBW Quad LED Moving Heads	46
CLHB300RGBW	HYDRABEAM 300 RGBW	Lighting system with 3 ultra-fast 10 W CREE RGBW Quad LED Moving Heads	42
CLHB300W	HYDRABEAM 300 W	Lighting system with 3 ultra-fast 10 W Lumi-Engin LED Moving Heads	44
CLHB400RGBW	HYDRABEAM 400 RGBW	Lighting set with 4 ultra-fast 10 W CREE RGBW Quad LED Moving Heads	38
CLHB400W	HYDRABEAM 400 W	Lighting set with 4 ultra-fast 10 W Lumi-Engin LED Moving Heads	40
CLHB600RGBW	HydraBeam 600 RGBW	Lighting set with 6 x 10 W CREE RGBW Quad LED Moving Heads	36
CLIA1000PRO	INSTANT AIR 1000 PRO	Wind machine with variable power and directivity	220
CLIH1400PRO	INSTANT HAZER 1400 PRO	Hazer with microprocessor control	218
CLIH1500TPRO	INSTANT HAZER 1500 T PRO	Touring Hazer with microprocessor control	216
CLKLINGT144	KLING TILE 144	LED Pixel Panel	48
CLLEKS20M	EKS 20 M	Emergency Stop Switch with Key Control and 20 m Cable	229
CLLILDA10M	ILDA 10 M	ILDA extension cable incl. screw lock 10 m	229
CLLILDA25M	ILDA 25 M	ILDA extension cable incl. screw lock 25 m	229
CLLILDA3M	ILDA 3 M	ILDA extension cable incl. screw lock 3 m	229
CLLILDA5M	ILDA 5 M	ILDA extension cable incl. screw lock 5 m	229
CLLIODA1000RGB	IODA 1000 RGB	Professional 1000mW RGB Show Laser	152
CLLIODA400RGY	IODA 400 RGY	Professional 400mW RGY Show Laser	152

REGISTER

Article no.	Model name	Description	Page
CLLIODA600RGB	IODA 600 RGB	Professional 600mW RGB Show Laser	152
CLLLUKE1000RGB	LUKE 1000 RGB	Professional 1000mW RGB Show Laser	154
CLLLUKE400RGY	LUKE 400 RGY	Professional 400mW RGY Show Laser	154
CLLLUKE700RGB	LUKE 700 RGB	Professional 700mW RGB Show Laser	154
CLLWOOKIE150G	WOOKIE 150 G	Animation Laser 150mW green	156
CLLWOOKIE200R	WOOKIE 200 R	Animation Laser 200mW red	156
CLLWOOKIE200RGY	WOOKIE 200 RGY	Animation Laser 200mW RGY	156
CLLWOOKIE400RGB	WOOKIE 400 RGB	Animation Laser 400mW RGB	156
CLLWOOKIE600B	WOOKIE 600 B	Animation Laser 600mW blue	156
CLMB100	MOVIBEAM 100	Unlimited Rotation Beam Moving Head with LED Ring	24
CLMF250	FLASH MATRIX 250	STROBE CHASER BLINDER	166
CLMFXBAR	MULTI FX BAR	All-In-One Solution with 5 Lighting Effects for Mobile DJs, Entertainers and Bands	204
CLMOVER1	MOONFLOWER	9 W TRI colour LED lighting effect	180
CLMP3WW	MATRIX PANEL 3 WW	5 x 5 LED Matrix Panel with single pixel control	50
CLMPAR1	Multi PAR 1	Compact 432 x 10 mm LED lighting system incl. transport case	212
CLMPAR1SET3	Multi PAR 1 SET	Set with 432 x 10 mm LED Lighting Set with Transport Case, 4 pedal Foot Switch and Stand	212
CLMPAR2	Multi PAR 2	Compact 28 x 3 W tri colour LED lighting system incl. transport case	210
CLMPAR2SET3	Multi PAR 2 SET	Set with 28 x 3 W Tri Colour LED Lighting Set with Transport Case, 4 pedal Foot Switch and Stand	210
CLMPAR3	Multi PAR 3	Compact 28 x 8 W QUAD colour LED lighting system incl. transport case	208
CLMPAR3SET3	Multi PAR 3 SET	Set with 28 x 8 W QUAD Colour LED Lighting Set with Transport Case, 4 pedal Foot Switch and Stand	208
CLMPARCOB1	Multi PAR COB 1	Compact 4 x 30 W RGB COB LED lighting system incl. transport case	206
CLMPARCOB1SET2	Multi PAR COB 1 SET	Set with 4 x 30 W RGB COB LED Lighting Set with Transport Case, 4 pedal Foot Switch and Stand	206
CLMPARFOOTPLUS	Multi PAR Foot +	4-switch foot pedal for all CLMPAR light sets	214
CLNB300	NanoBeam 300	1 x 30 W Cree LED RGBW Mini Moving Head with Unlimited Pan incl. IR-Remote	26
CLNS120	NanoSpot 120	LED Mini Moving Head 12 W	30
CLNW400	NanoWash 400	4 x 10 W Cree RGBW LED Mini Wash Moving Head with Single Pixel Control and unlimited Pan incl. IR-Remote	28
CLOFRGBW	OCTAFLY RGBW	8 x 10W RGBW CREE LED Moving Effect Light	32
CLOFW	OCTAFLY W	8 x 10W Cold White LED Moving Effect Light	34
CLP56Q8WBS	PAR 56 Q 8 WBS	9 x 8 W QUAD Colour LED RGBW PAR light in black housing	60
CLP56Q8WPS	PAR 56 Q 8 WPS	9 x 8 W QUAD Colour LED RGBW PAR light in polished housing	60
CLP56RGB05BS	PAR 56 CAN RGB 05 BS	151 x 5 mm LED RGB PAR light in black housing	74
CLP56RGB05PS	PAR 56 CAN RGB 05 PS	151 x 5 mm LED RGB PAR light in polished housing	74
CLP56RGB10BS	PAR 56 CAN RGB 10 BS	108 x 10 mm LED RGB PAR light in black housing	72
CLP56RGB10PS	PAR 56 CAN RGB 10 PS	108 x 10 mm LED RGB PAR light in polished housing	72
CLP56TRI3WBS	PAR 56 CAN 3W BS	9 x 3 W TRI colour LED RGB PAR light in black housing	66
CLP56TRI3WPS	PAR 56 CAN TRI RGB 3W	9 x 3 W TRI colour LED RGB light in polished housing	66
CLP64Q8WBS	PAR 64 CAN Q 8W BS	18 x 8W QUAD Colour LED RGBW PAR light in black housing	58
CLP64Q8WPS	PAR 64 CAN Q 8W PS	18 x 8W QUAD Colour LED RGBW PAR light in polished housing	58
CLP64RGB10BS	PAR 64 CAN 10 BS	183 x 10 mm LED RGB PAR light in black housing	70
CLP64RGB10PS	PAR 64 CAN RGB 10 PS	183 x 10 mm LED RGB PAR light in polished housing	70
CLP64RGB3WBS	PAR 64 CAN RGB 3W BS	36 x 3 W LED RGB PAR light in black housing	62
CLP64RGB3WPS	PAR 64 CAN RGB 3W PS	36 x 3 W LED RGB PAR light in polished housing	62
CLP64RGB10BS	PAR 64 CAN RGBA 10 BS	177 x 10 mm LED RGBA PAR light in black housing	68
CLP64RGB10PS	PAR 64 CAN RGBA 10 PS	177 x 10 mm LED RGBA PAR light in polished housing	68
CLP64RGBWAU10WBS	PAR 64 CAN RGBWA+UV 10 WBS	12 x 10W 6-in-1 LED RGBWA+UV PAR light in black housing	56
CLP64RGBWAU10WPS	PAR 64 CAN RGBWA+UV 10 WPS	12 x 10W 6-in-1 LED RGBWA+UV PAR light in polished housing	56
CLP64TRI3WBS	PAR 64 CAN TRI 3W BS	18 x 3 W TRI colour LED RGB PAR light in black housing	64
CLP64TRI3WPS	PAR 64 CAN TRI 3W PS	18 x 3 W TRI colour LED RGB PAR light in polished housing	64
CLPEX001	P EX 001	Power Extension Cable IP65 1m	132
CLPEX003	P EX 003	Power Extension Cable IP65 3m	132
CLPEX005	P EX 005	Power Extension Cable IP65 5m	132
CLPEX010	P EX 010	Power Extension Cable IP65 10m	132
CLPEX020	P EX 020	Power Extension Cable IP65 20m	132
CLPFLAT1REMOTE	FLAT PAR CAN REMOTE	Infrared remote control for FLAT PAR CAN projector	86
CLPFLAT1RGB10IR	FLAT PAR CAN RGB 10 IR	144 x 10 mm FLAT LED RGB PAR Spot light in black housing with IR-remote control capability	92
CLPFLAT1RGB10IRSET1	FLAT PAR CAN RGB 10 IR SET	Set of 4 PAR Spots 144 x 10 mm FLAT LED RGB in black housing incl. Infrared remote	92
CLPFLAT1RGB10IRWH	FLAT PAR CAN RGB 10 IR WH	144 x 10 mm FLAT LED RGB PAR Spot light in white housing with IR-remote control capability	92
CLPFLAT1RGBWIR	FLAT PAR 1 RGBW IR	7 x 4 W High-Power FLAT RGBW LED PAR Light in black housing with IR remote control option	86
CLPFLAT1RGBWIRWH	FLAT PAR 1 RGBW IR WH	7 x 4 W High-Power FLAT RGBW LED PAR Light in white housing with IR remote control option	86
CLPFLAT1TRI3WIR	FLAT PAR CAN TRI 3W IR	7 x 3 W High Power TRI colour FLAT LED RGB PAR light in black housing	88
CLPFLAT1TRI3WIRSET1	FLAT PAR CAN TRI 3W IR SET	Set of 4 PAR lights 7 x 3 W High Power TRI colour FLAT LED RGB in black housing incl. Infrared remote	88
CLPFLAT1TRI3WIRWH	FLAT PAR CAN TRI 3W IR WH	7 x 3 W High Power TRI colour FLAT LED RGB PAR light in white housing	88
CLPFLAT1TRI3WIRWHSET	FLAT PAR CAN TRI 3W IR WH SET	Set of 4 PAR lights 7 x 3 W High Power TRI colour FLAT LED RGB in white housing incl. Infrared remote	88
CLPFLAT1TRI5X3WIR	FLAT PAR CAN TRI 5x3W IR	5 x 3 W High Power TRI colour FLAT LED RGB PAR light in black housing with IR-remote control capability	90

Article no.	Model name	Description	Page
CLPFLAT1TRI5X3WSET1	FLAT PAR CAN TRI 5X3W IR SET	Set of 4 PAR lights 5 x 3 W High Power TRI colour FLAT LED RGB in black housing incl. Infrared remote	90
CLPFLAT1UVIR	FLAT PAR CAN 7X3W UV IR	7 x 3 W High Power FLAT LED UV PAR Light In Black Housing	94
CLPFLAT1UVIRWH	FLAT PAR CAN 7X3W UV WH	7 x 3 W High Power FLAT LED UV PAR Light In White Housing	94
CLPFLATPRO12	FLAT PRO 12	12 x 10 W FLAT LED RGBWA PAR light in black housing	80
CLPFLATPRO12IP65	FLAT PRO 12 IP65	12 x 10 W FLAT LED Outdoor RGBWA PAR light in black housing	120
CLPFLATPRO18	FLAT PRO 18	18 x 10 W FLAT LED RGBWA PAR light in black housing	80
CLPFLATPRO18IP65	FLAT PRO 18 IP65	18 x 10 W FLAT LED Outdoor RGBWA PAR light in black housing	120
CLPFLATPRO7	FLAT PRO 7	7 x 10 W FLAT LED RGBWA PAR light in black housing	80
CLPFLATPRO7IP65	FLAT PRO 7 IP65	7 x 10 W FLAT LED Outdoor RGBWA PAR light in black housing	120
CLPFLATPRO7SPOT	FLAT PRO 7 SPOT	Compact, flat 7 x 15 Watt Quad LED PAR spot	82
CLPFLATPRO7XS	FLAT PRO 7 XS	Compact, flat 7 x 8 Watt Quad LED PAR light	84
CLPIXBAR400PRO	Pixbar 400 Pro	PROFESSIONAL 12 X 8 W RGBW LED BAR	138
CLPIXBAR500PRO	CLPIXBAR 500 PRO	Professional 6 x 12 W RGBWA+UV LED Bar	140
CLPIXBAR600PRO	PIXBAR 600 PRO	Professional 12 x 12 W RGBWA+UV LED Bar	140
CLPIXBAR600PROIP65	PIXBAR 600 PRO IP65	RDM enabled 12 x 12 W RGBWA+UV Outdoor LED Bar	130
CLPIXBAR650CPRO	PIXBAR 650 CPRO	Professional 8 x 30 W COB LED bar	136
CLPST64Q8W	Studio PAR 64 CAN Q 8W	18 x 8W QUAD Colour LED RGBW PAR light in black housing	98
CLPST64RGBAQ8W	Studio PAR 64 CAN RGBA Q 8W	18 x 8W QUAD Colour LED RGBA PAR light in black housing	100
CLPST64RGBWAU12W	Studio PAR 64 CAN RGBWA+UV 12 W	12 x12W QUAD Colour LED RGBWA+UV PAR light in black housing	96
CLPST64RGBWAU12WWH	Studio PAR 64 CAN RGBWA+UV 12 W WH	12 x12W QUAD Colour LED RGBWA+UV PAR light in white housing	96
CLPST64TRI3W	Studio PAR 64 CAN TRI 3W	18 x 3 W TRI colour LED RGB PAR light in black housing	102
CLPSTBARND00R1B	Studio PAR BARN DOOR 1 B	Barn doors for Studio Mini PAR black	112
CLPSTBARND00R1WH	Studio PAR BARN DOOR 1 WH	Barn doors for Studio Mini PAR white	112
CLPSTBARND00R2B	Studio PAR BARN DOOR 2 B	Barn doors for Studio PAR black	113
CLPSTMINICOB30W	Studio Mini PAR COB 30W	30W COB LED PAR Can RGB in black housing	106
CLPSTMINICOB30WWH	Studio Mini PAR COB 30W WH	30W COB LED PAR Can RGB in white housing	106
CLPSTMINIQ4WW	Studio Mini PAR Q 4W W	7 x 4 W Cold White/Warm White LED PAR Can in black housing	108
CLPSTMINIQ4WWWH	Studio Mini PAR Q 4W W WH	7 x 4 W Cold White/Warm White LED PAR Can in white housing	108
CLPSTMINIQ8W	Studio Mini PAR Q 8W	7 x 8 W QUAD colour LED RGBW PAR light in black housing	104
CLPSTMINIQ8WWH	Studio Mini PAR Q 8WWH	7 x 8 W QUAD Colour LED PAR Can RGBW in white housing	104
CLPSTMINITRI3W	Studio Mini PAR TRI 3W	7 x 3 W TRI colour LED RGB PAR light in black housing	110
CLPSTMINITRI3WWH	Studio Mini PAR TRI 3W WH	7 x 3 W TRI Colour LED PAR Can RGB in white housing	110
CLPSTTRI12IP	Outdoor PAR TRI 12 IP 65	12 x 3 W TRI Colour LED Outdoor PAR Can RGB in black housing	128
CLQR40	QuadRoll 40	4-Head Barrel Scanner	200
CLQS15RGBW	Q-Spot 15 RGBW	Compact Spot Light With 15W RGBW LED In Black Housing	76
CLQS15RGBWWH	Q-Spot 15 RGBW WH	Compact Spot Light With 15W RGBW LED In White Housing	76
CLQS15W	Q-Spot 15 W	Compact Spot Light with 15W warm white LED in black housing	78
CLQS15WH	Q-Spot 15 WH	Compact Spot Light with 15W warm white LED in white housing	78
CLSB6D	SB 6 DUAL	6-channel DMX splitter / booster (3-pin and 5-pin)	224
CLSB83	SB8.3	8-channel DMX splitter / booster (3-pin)	224
CLSB85	SB8.5	8-channel DMX splitter / booster (5-pin)	224
CLSCAN60W	GOBO SCANNER 60	LED Gobo Scanner Lighting 60 W	198
CLSERUM	SERUM	3-in-1 Derby, Moonflower and Strobe Effect Light	188
CLSTORM	STORM	3 in 1 lighting effect, 5 x 3W RGBWA Derby, Strobe and Grating Laser	172
CLSTORMFX	STORM FX	3-in-1 lighting effect with Grating Laser, Strobe and Derby Effect incl. IR-Remote	176
CLSTROBE2	STROBE 2	Extremely Powerful Strobe with 6 x 10W COB LEDs	170
CLSUPERFLYFX	SUPERFLY FX	2-in-1 LED Derby Effect with Grating Laser	186
CLSUPERFLYHP	SUPERFLY HP	5 x 10 Watt RGBWA Highpower LED effect	182
CLSUPERFLYXS	SUPERFLY XS	2-in-1 Derby Effect and Strobe incl. IR-Remote	184
CLTRIBAR200IR	TRIBAR 200 IR	12 x 3 W TRI LED Bar in black housing with IR Remote Control	142
CLTRIBAR200IRWH	TRIBAR 200 IR WH	12 x 3 W TRI LED Bar in white housing with IR Remote Control	142
CLTRIBAR400IR	Tribar 400 IR	24 X 3 W TRI LED BAR IN BLACK HOUSING WITH IRREMOTE CONTROL	144
CLTS40WW	THEATRE SPOT 40 WW	Theatre Spotlight with PC Lens and 40 Watt warm white LED	54
CLTS60WRGBW	THEATRE SPOT 60 WRGB	Theatre Spotlight with PC Lens and 60 W RGBW LED	52
CLTW100RGB	THUNDER WASH 100 RGB	3 in 1 Strobe, Blinder and Wash Light 132 x 0.2 W RGB	162
CLTW100W	THUNDER WASH 100 W	3 in 1 Strobe, Blinder and Wash Light 132 x 0.2 W white	164
CLTW600RGB	THUNDER WASH 600 RGB	3 in 1 Strobe, Blinder and Wash Light 648 x 0.2 W RGB	158
CLTW600W	THUNDER WASH 600 W	3 in 1 Strobe, Blinder and Wash Light 648 x 0.2 W white	160
CLTWINSKAN20	TWINSKAN 20	Dual 10W Cree LED Gobo Scanner	202
CLUVBAR200IR	UVBAR 200 IR	12 x 3 W UV LED Bar in black housing with IR Remote Control	146
CLVOODOO	VOODOO	2-in-1 Derby and Strobe Effect Light	190
CLWAYFARER	WAYFARER	Four Eyes Derby Matrix Beam Light	196
CLZP130LSD	ZENIT P 130	Professional Outdoor PAR Can IP65 with innovative light shaping diffusers	116
CLZP40LSD	ZENIT P 40	Professional Outdoor PAR Can IP65 with innovative light shaping diffusers	118
CLZZ120	ZENIT Z 120	Professional Zoom PAR light with IP65	114



PRODUCT CATALOGUE

EDITION 2017

The information contained in this publication, including numerical data, has been prepared as a general guide to the products, but intending buyers and users must satisfy themselves as to the suitability and the safety of the products for their particular purposes and duties. No responsibility is assumed for any errors herein. The company reserves the right to alter the designs and material specifications of products shown in this publication without notice.

www.cameolight.com
Cameo® is a brand of the Adam Hall Group.



www.facebook.com/cameolightandsound
www.youtube.com/cameolightandsound
blog.adamhall.com

YOUR **CAMEO**® DEALER:



LED Luminaires and Retrofit Bulbs Licensing Program

Member
Cameo® is a registered brand of the Adam Hall Group.

